




Eccentric Connector

Technical Datasheet

uponor



Eccentric connectors for smooth transitions

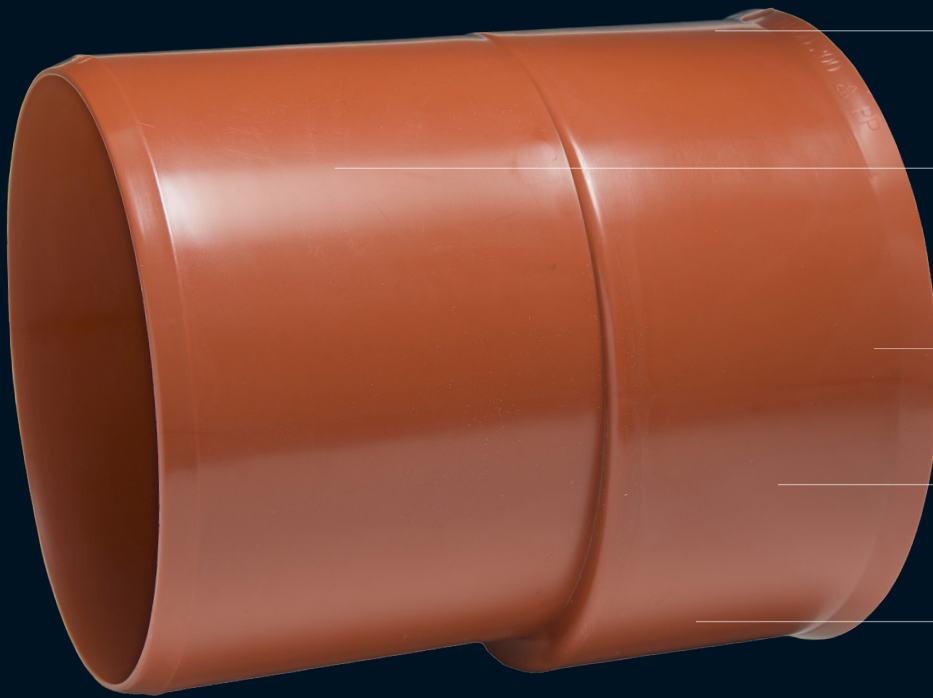

A marking shows the correct installation position.

A long spigot guarantee that there is no gap in the connection.

The enlarged socket end ease the installation.

The eccentric design ensure a smooth transition and flow level.

Made from injection moulded PP gives accurate tolerances and ensure water tightness.


Eccentric connector

Eccentric connectors can be used connecting smooth and corrugated (Ultra Double, IQ OD) or ribbed pipe (Ultra Rib 2) system.

It is an excellent solution to use in chambers and manhole connections designed for smooth pipe or when connecting two different types of pipes.


Application	Sewer and Storm
Material	Polypropylene
Colour	Red brown
Type	Eccentric spigot/socket connector
Dimensions	200, 250 and 315mm
Standard	EN 1852-1

Features of Eccentric connector

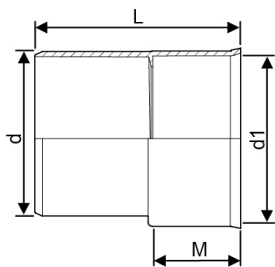

d mm	d1 mm	L mm	M mm
200	200	870	135
250	250	1150	260
315	315	1098	229

Eccentric connector	Dimension	Uponor no	VVS no
	200/200S	1120417	
	250/250S	1120418	
	315/315S	1120419	

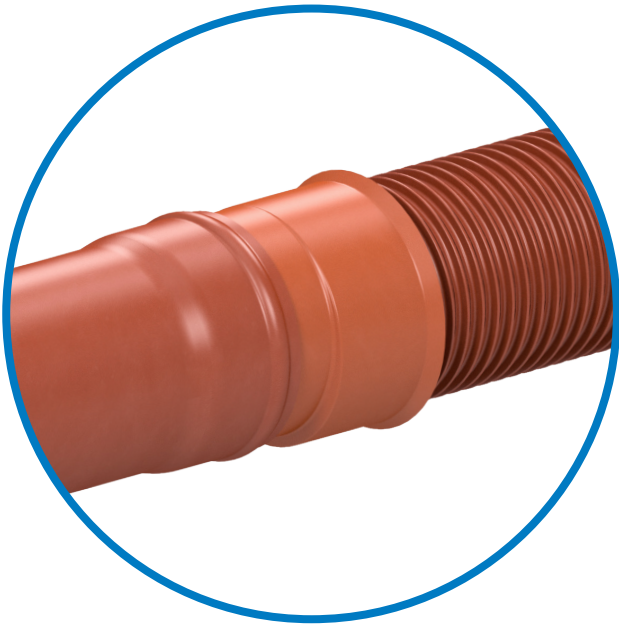

Moving > Forward

uponor

Uponor Corporation

Äyritie 20
01510 Vantaa
Finland

T +358 (0)20 129 211
F +358 (0)20 129 2841
www.uponor.com

Uponor Corporation

Äyritie 20
01510 Vantaa
Finland

T +358 (0)20 129 211
F +358 (0)20 129 2841
www.uponor.com