




Uponor Ecoflex coupling & weldable adapter

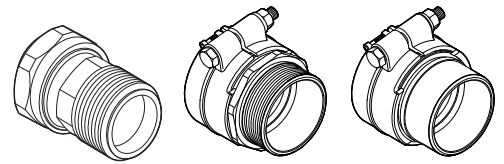


1

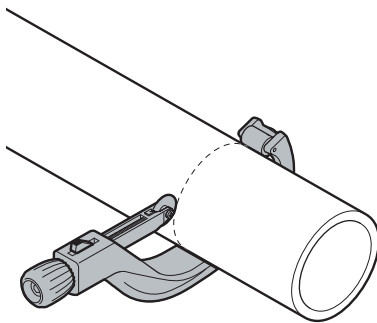


2




3




4

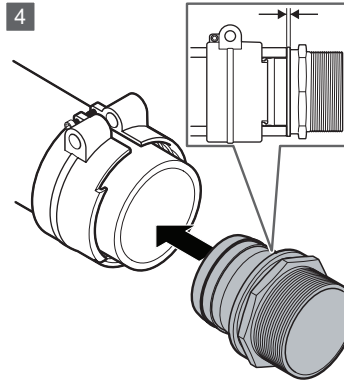

5

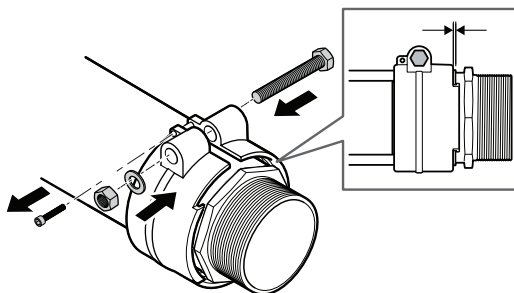


6







1

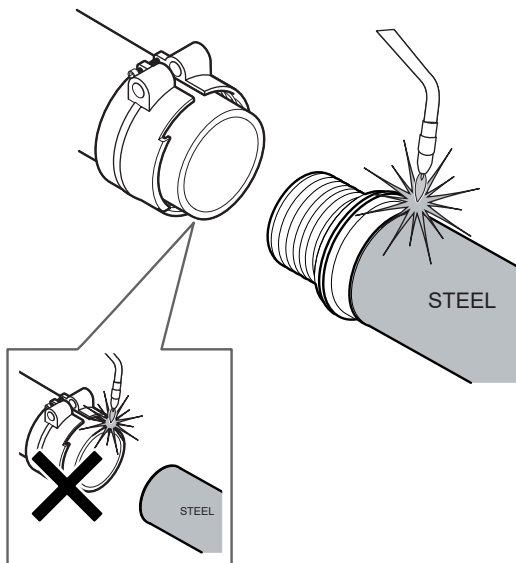


2

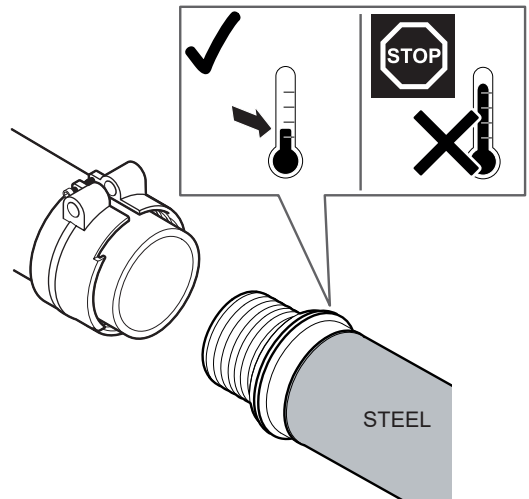

3

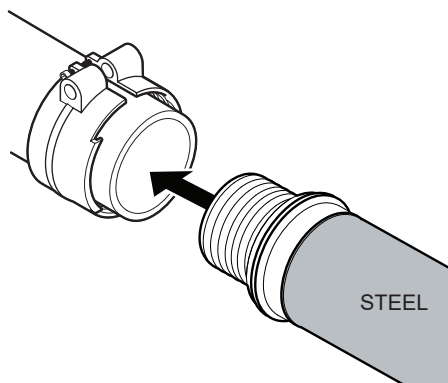


4

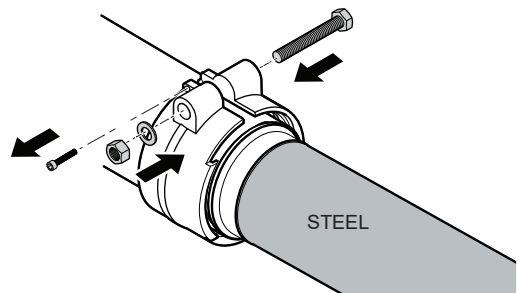


5




≥ 30 min






1

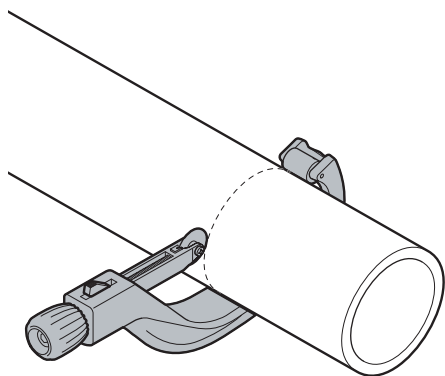


2





d [mm]	L [mm]
25	14
32	17
40	19
50	21




3

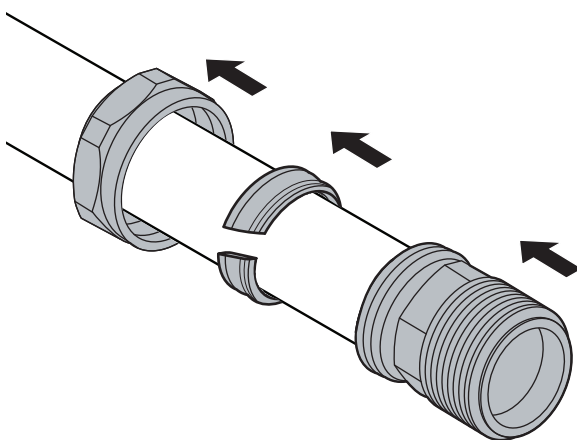

4

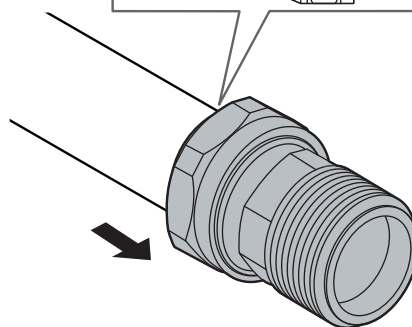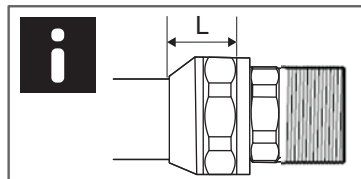

5

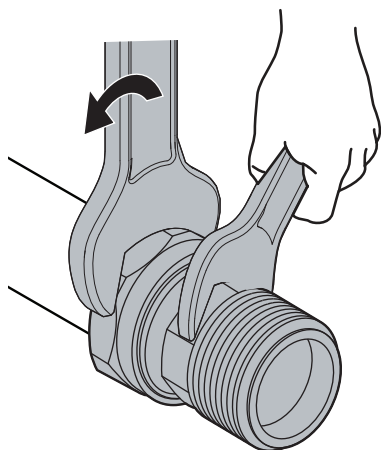

Uponor GmbH

Industriestraße 56,
D-97437 Hassfurt, Germany

1085019 v3_08_2026
GF / JLI_ASP

Uponor reserves the right to make changes, without prior notification,
to the specification of incorporated components in line with its policy
of continuous improvement and development.



www.uponor.com