

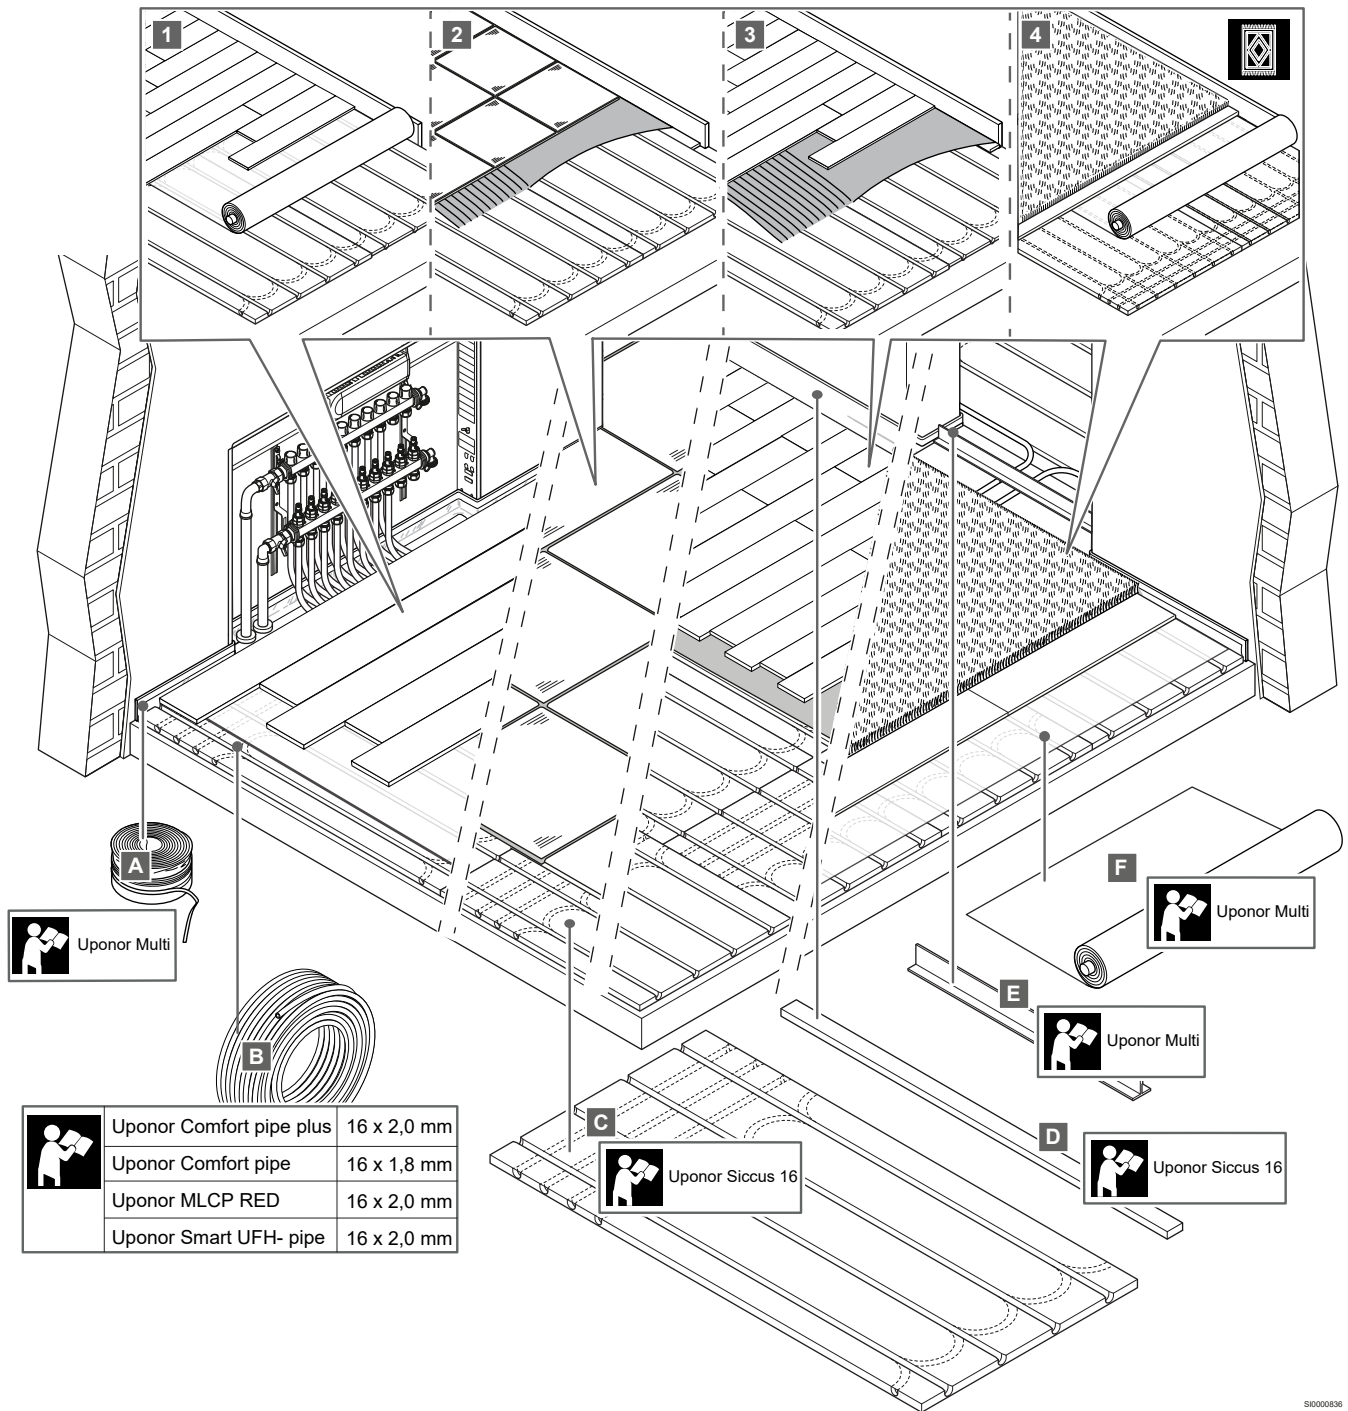















Uponor Siccus 16

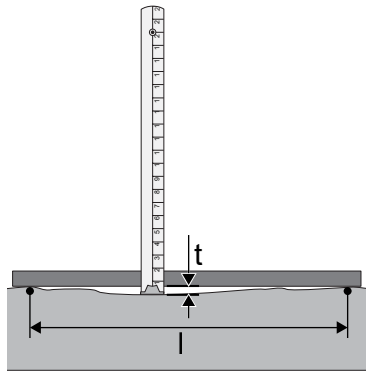

















DIN EN 18202

l (m)	0,1	1	4	10	15
t (mm)	1	3	9	12	15





S10000863

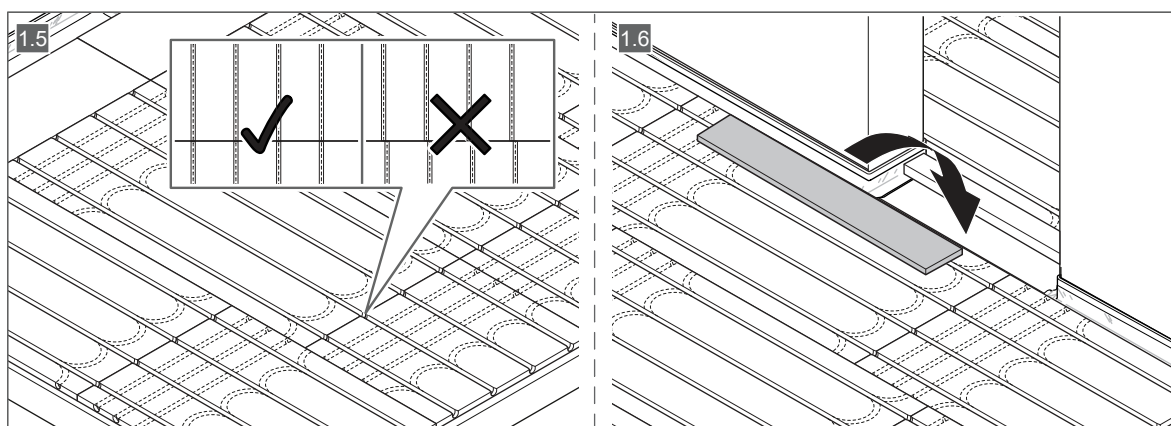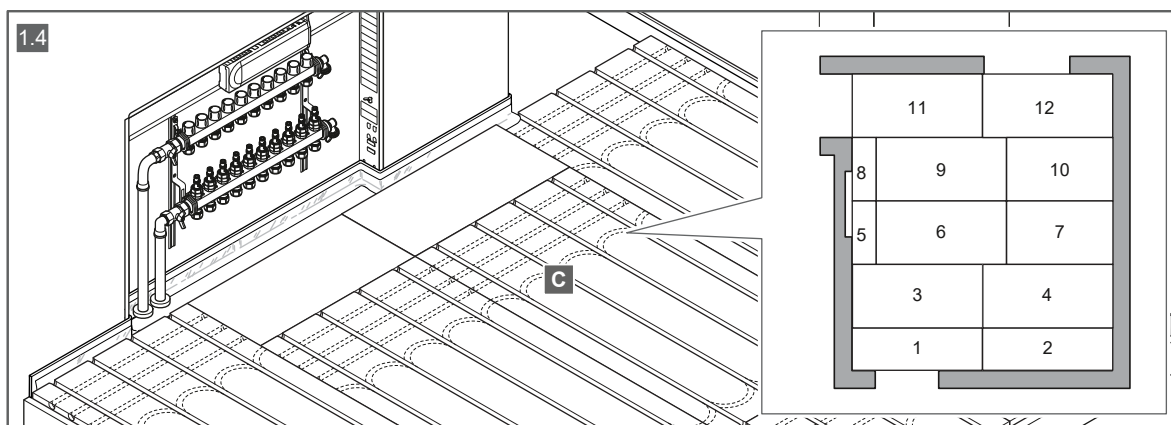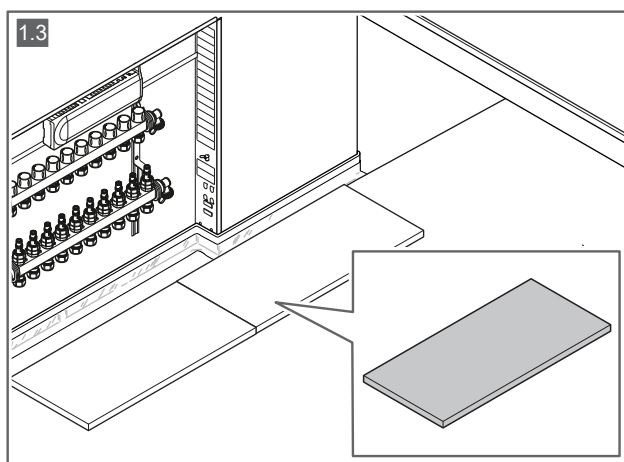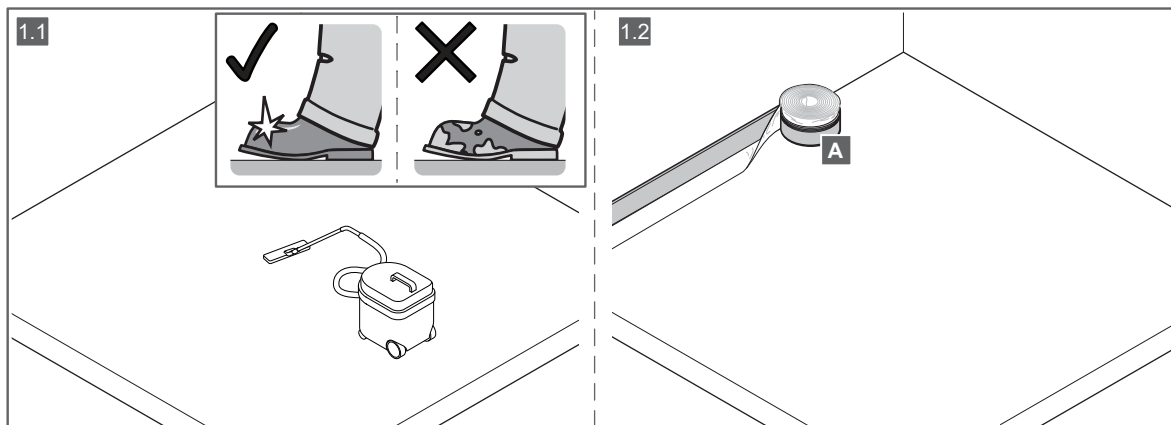

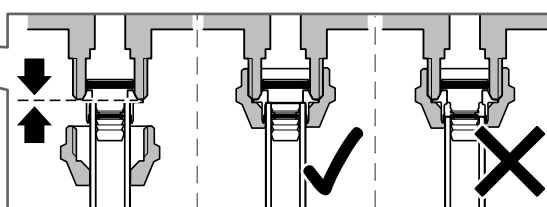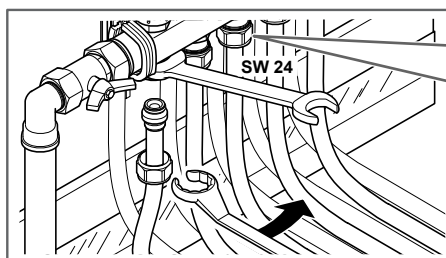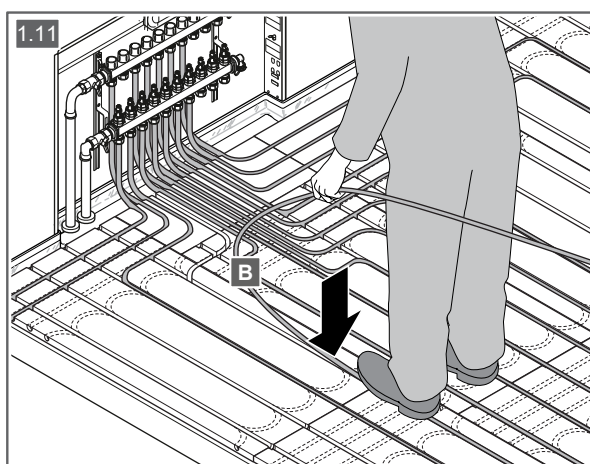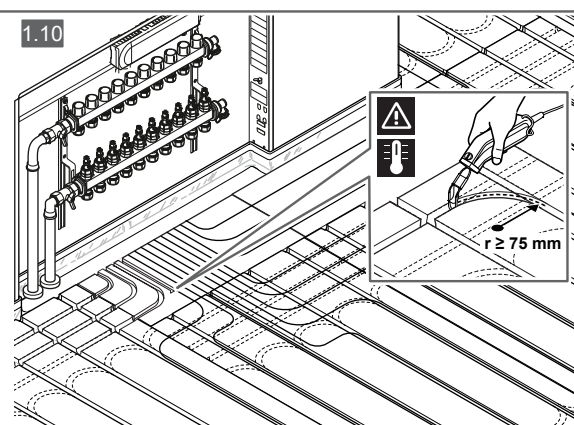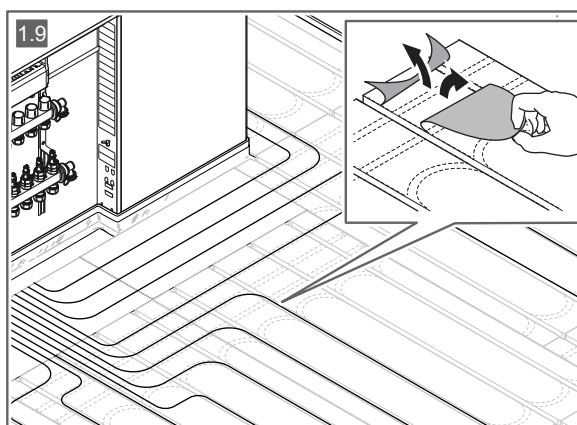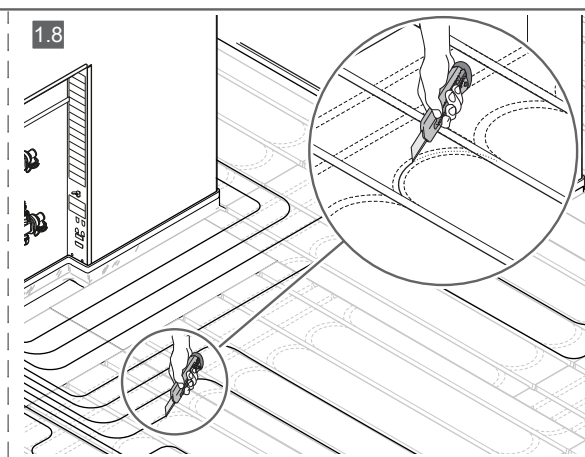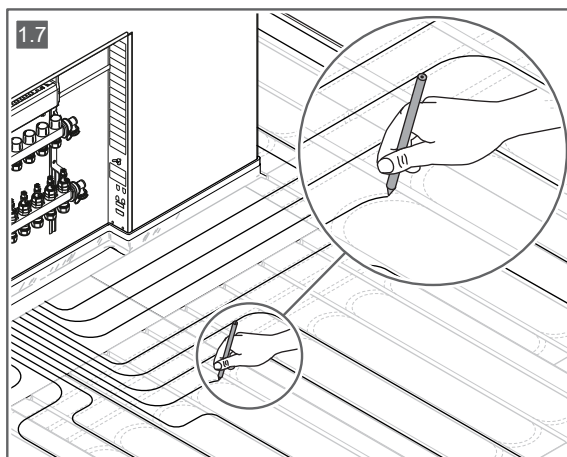








1

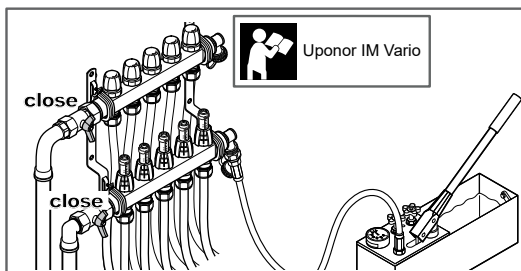






2 h












P = 4 - 6 bar

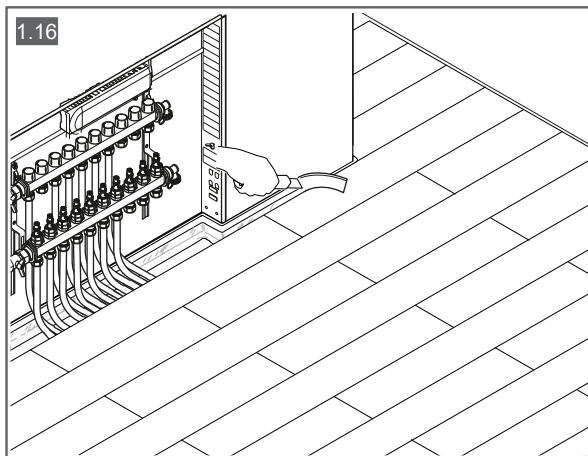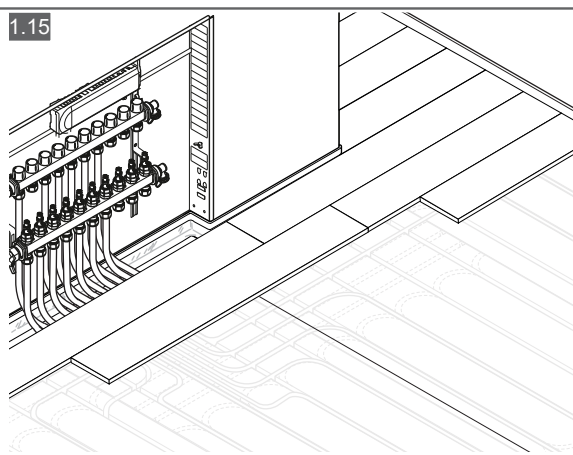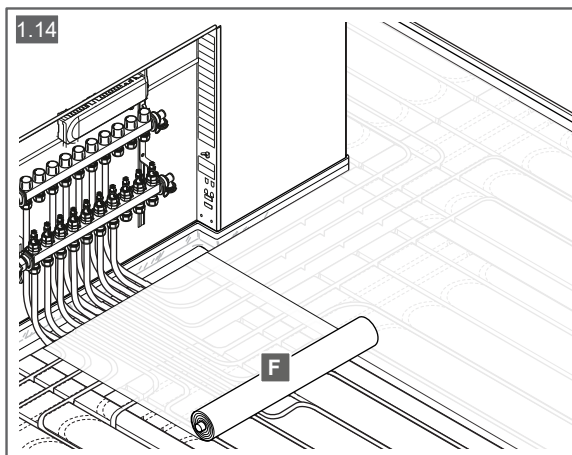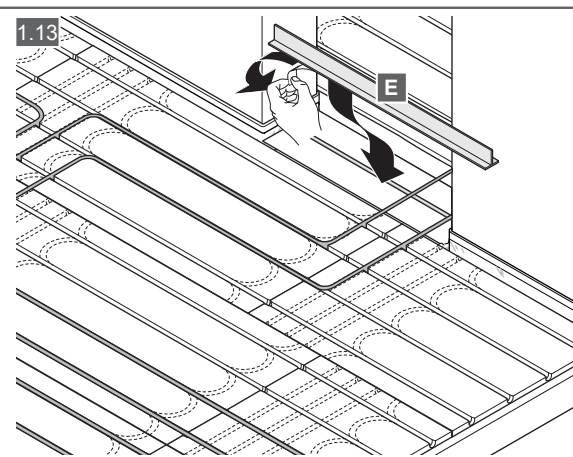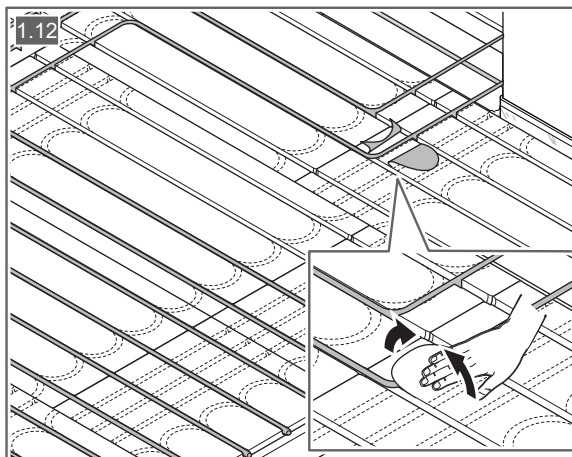









S10001016

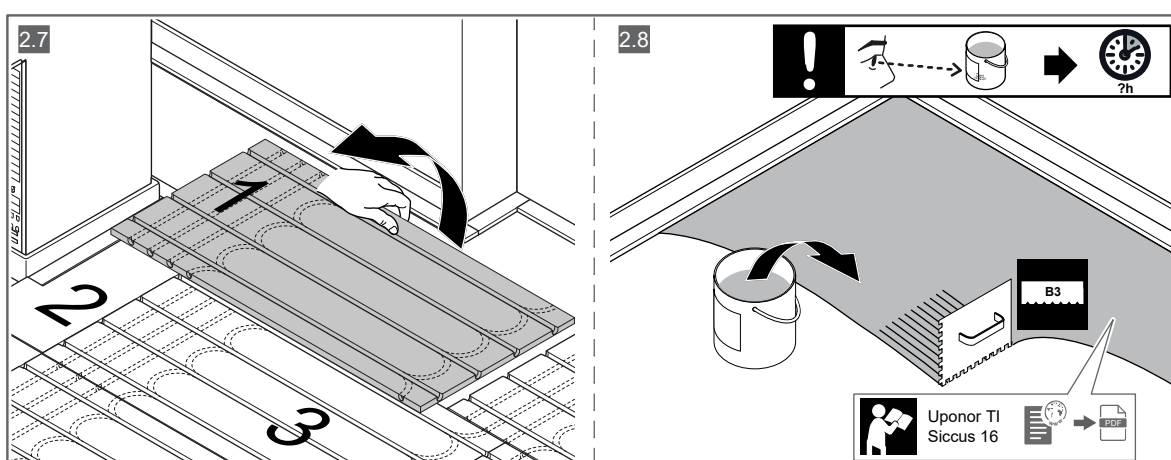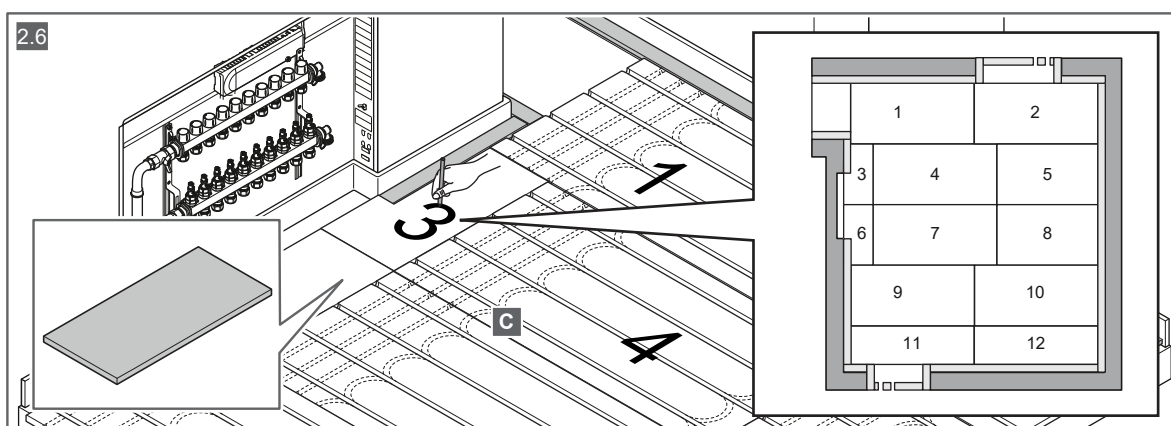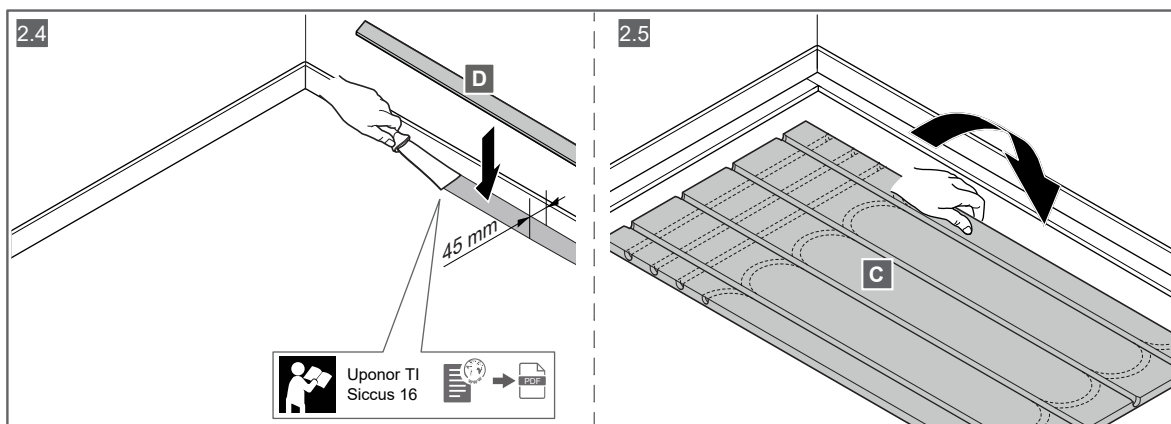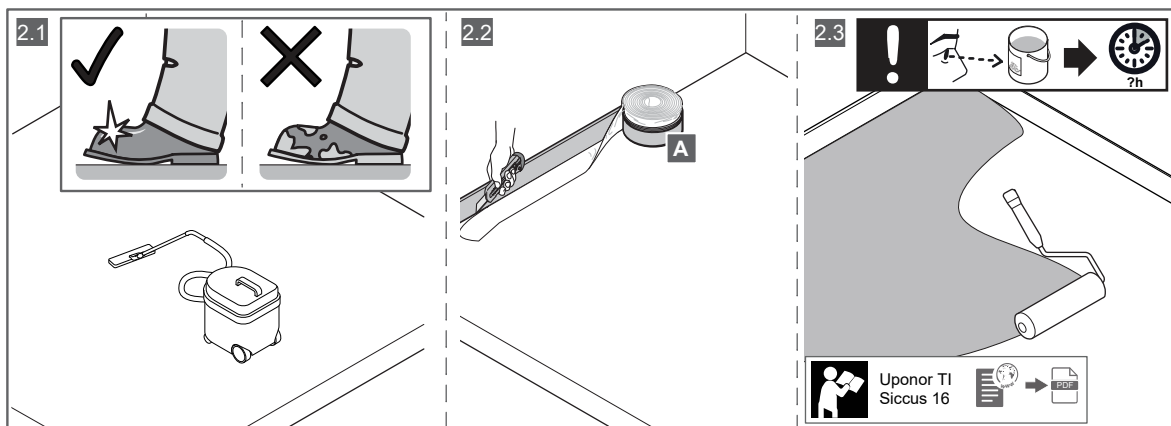






2

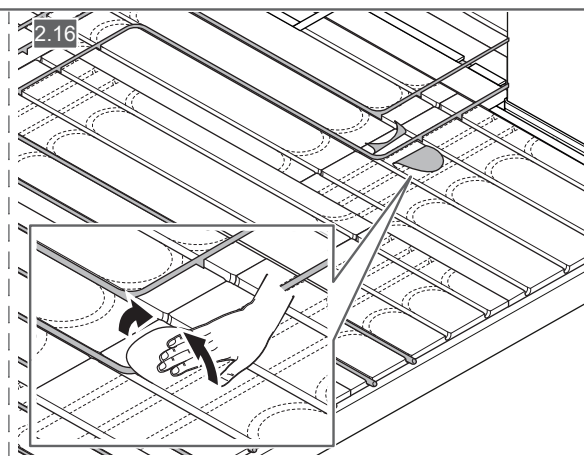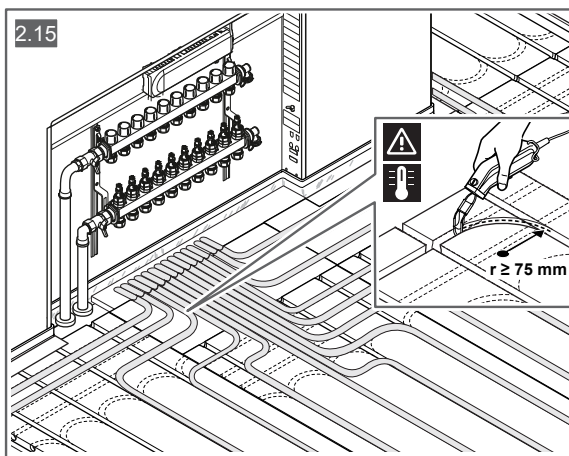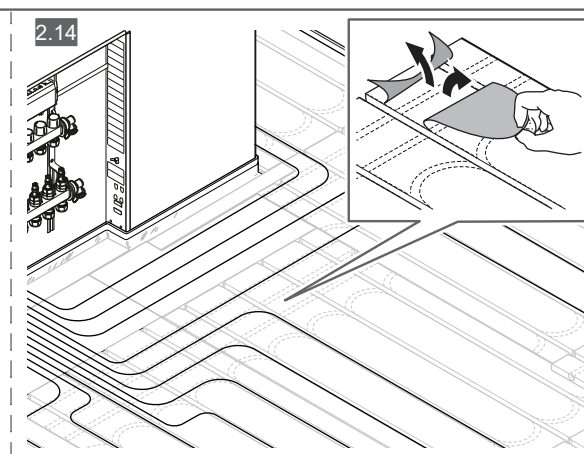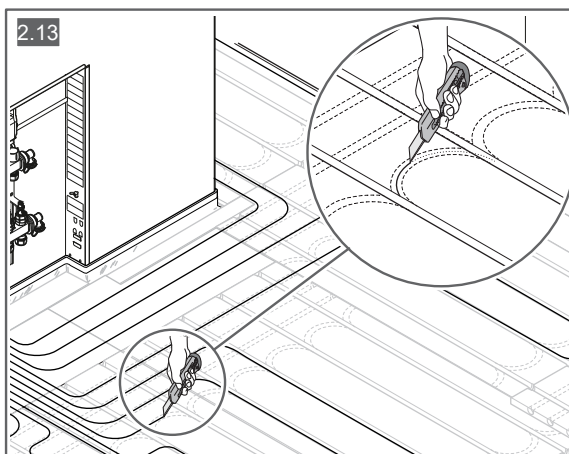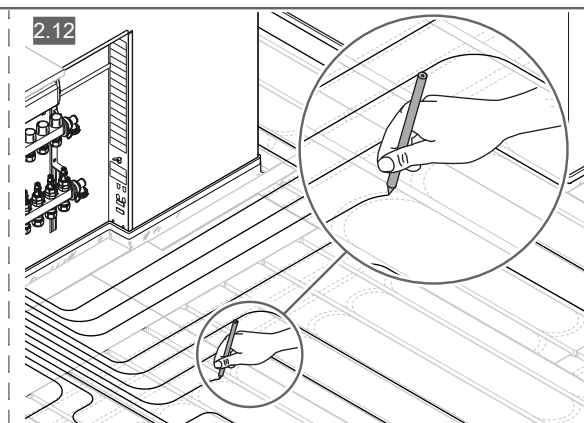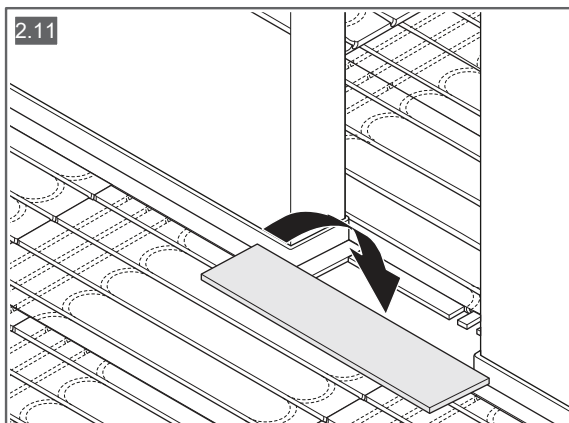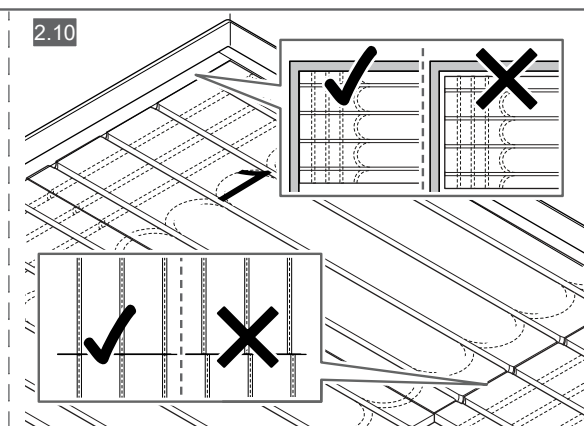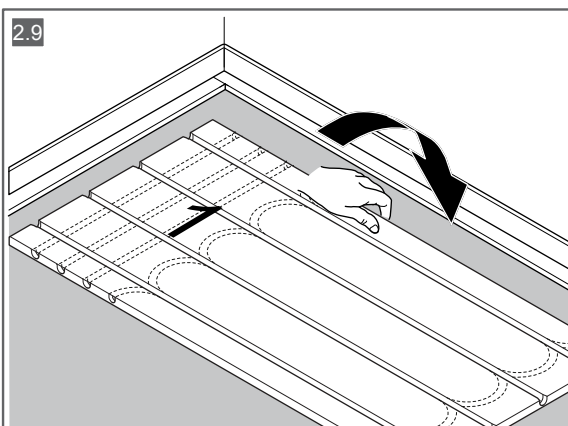





S8000841

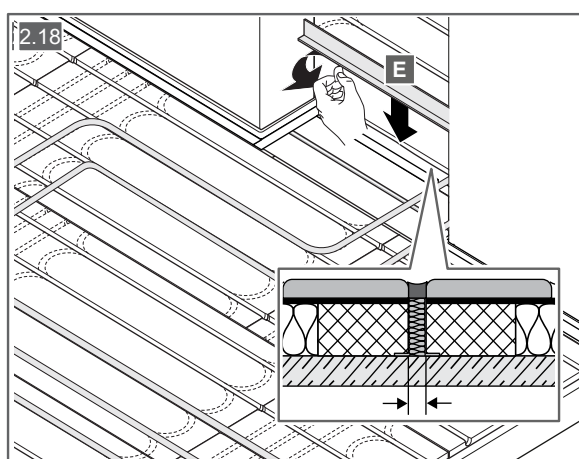
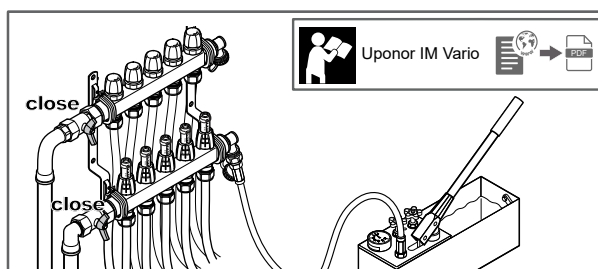
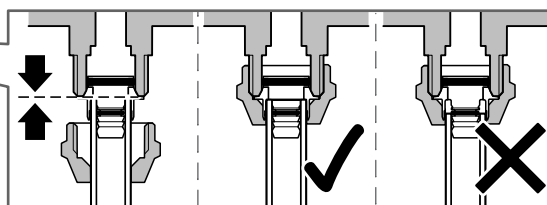
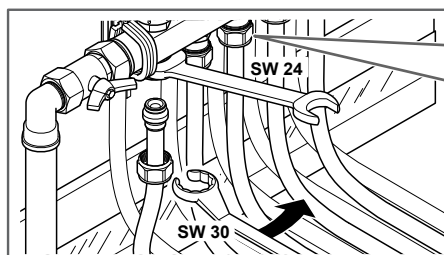

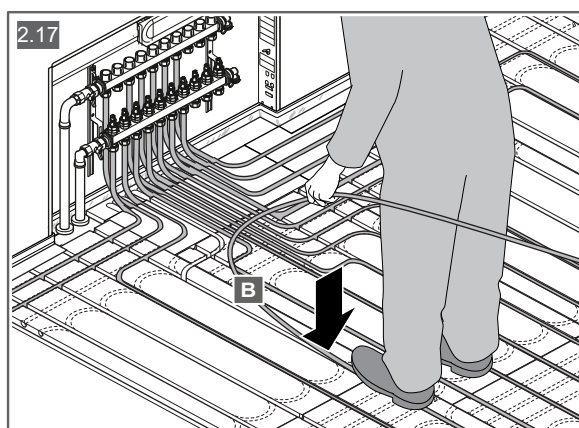



2

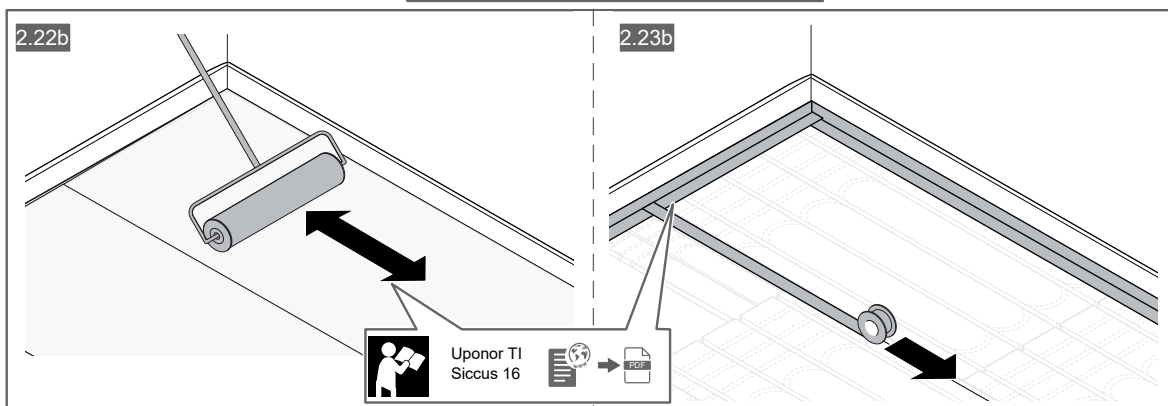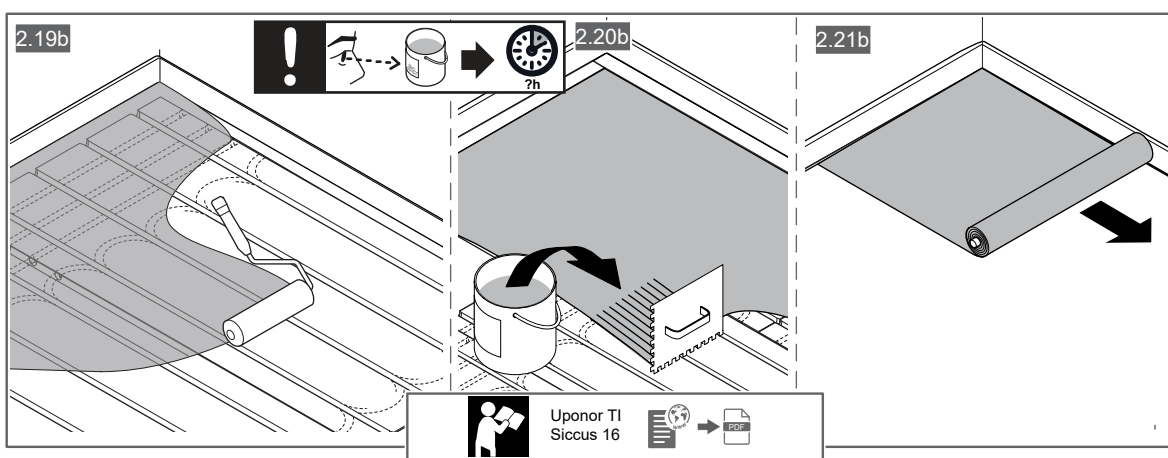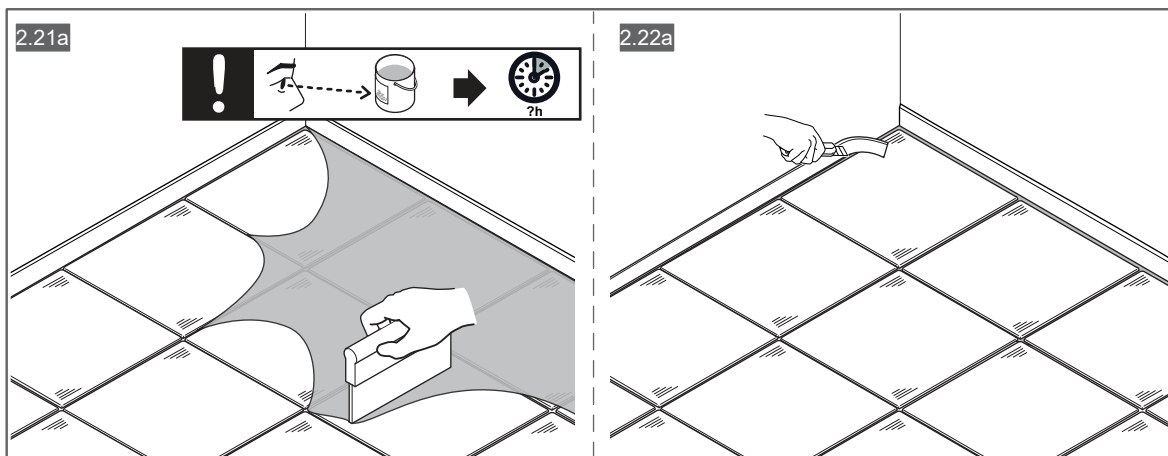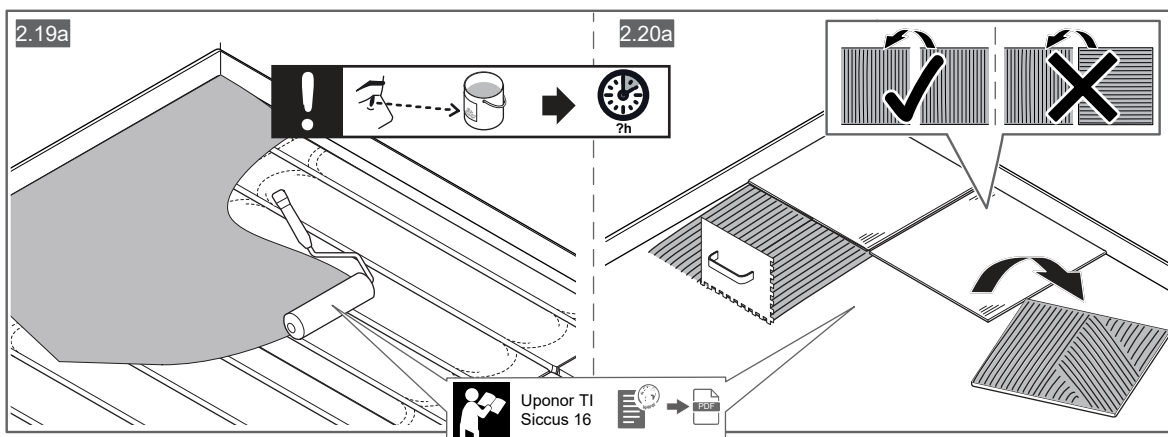


© 2019 UPP

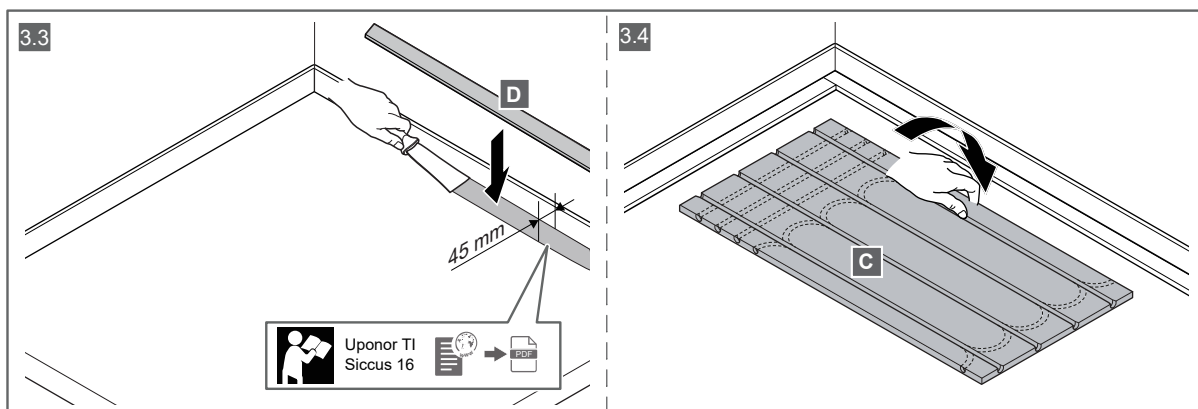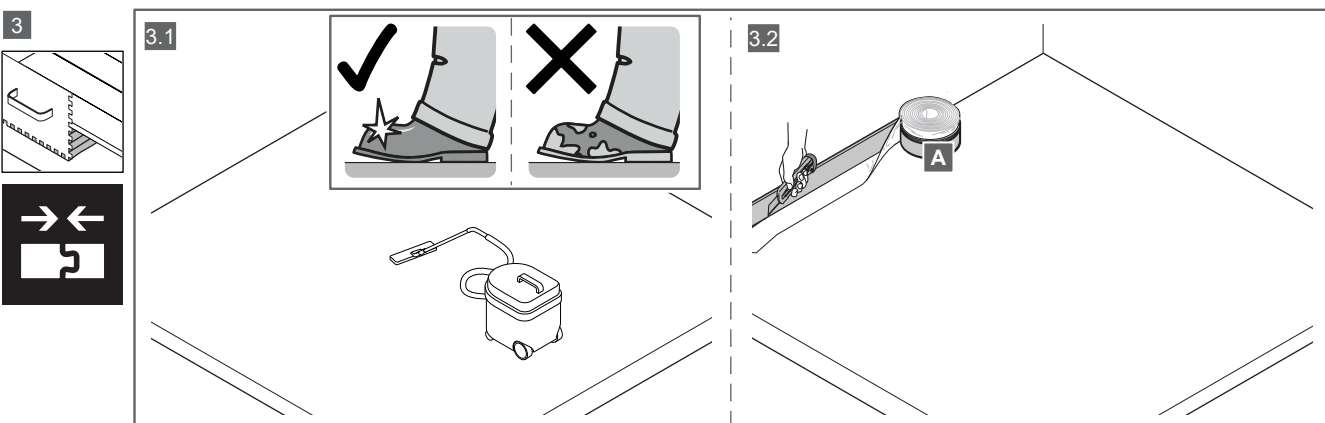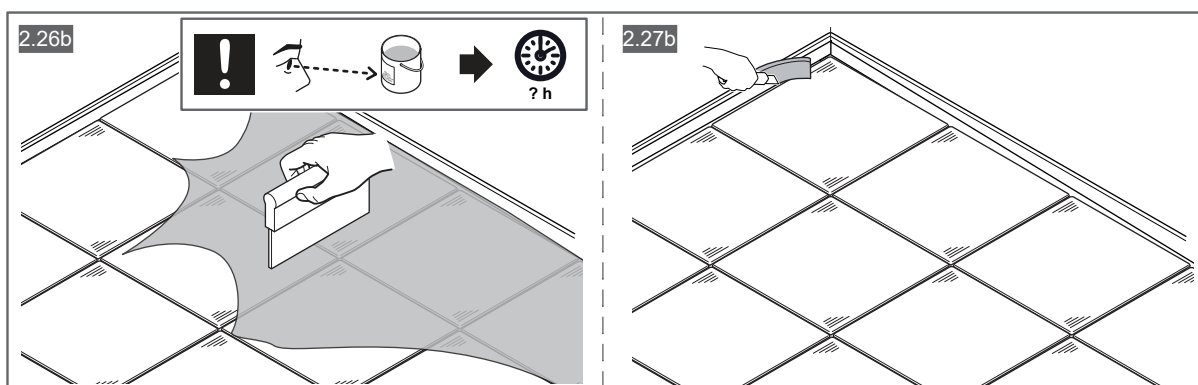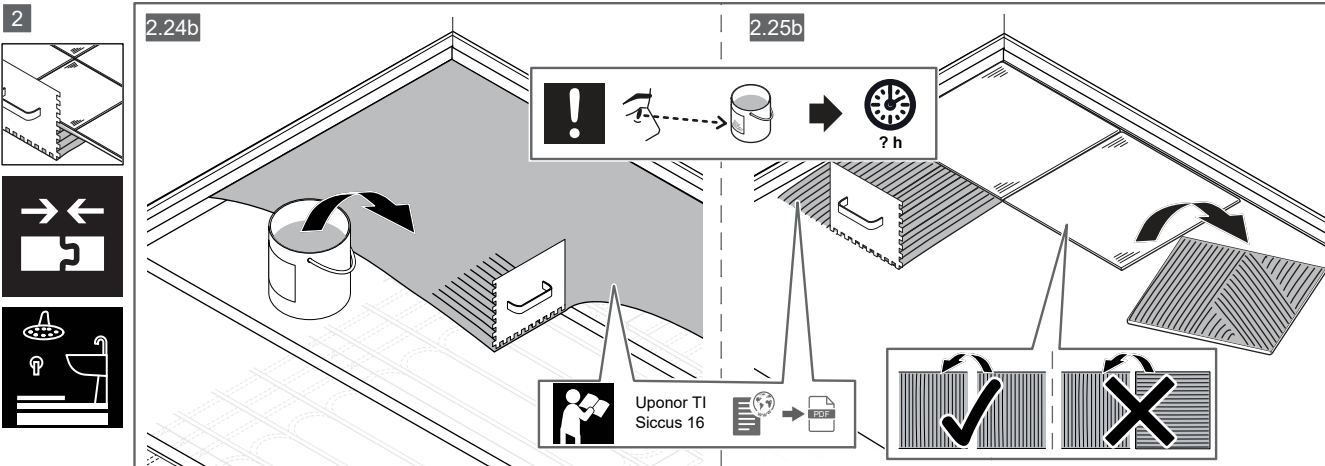

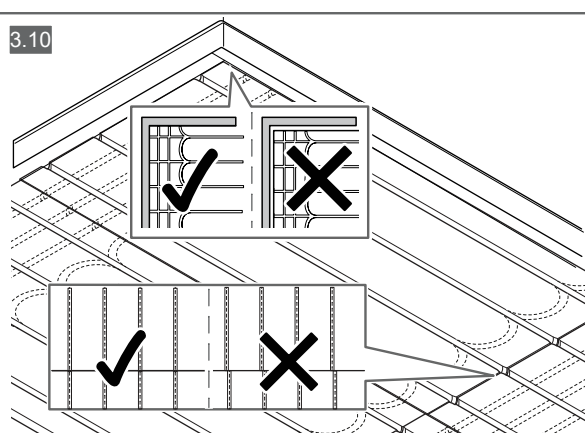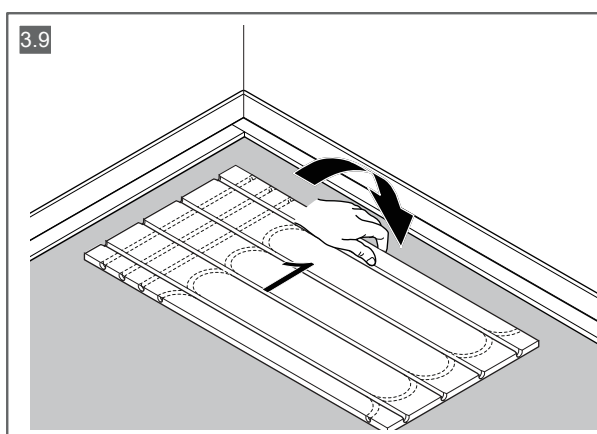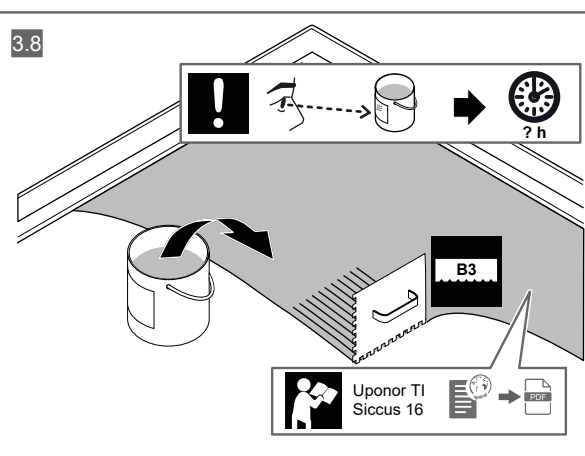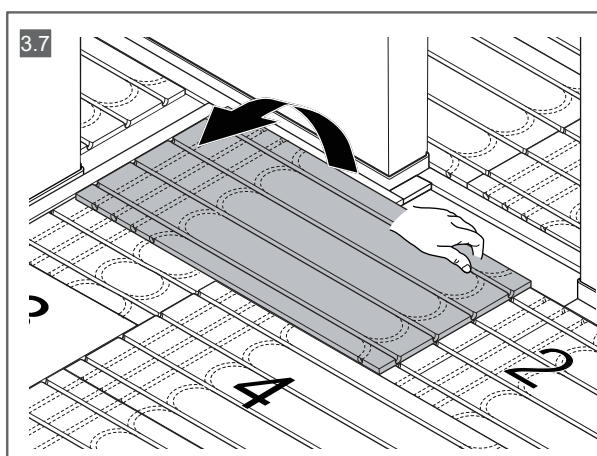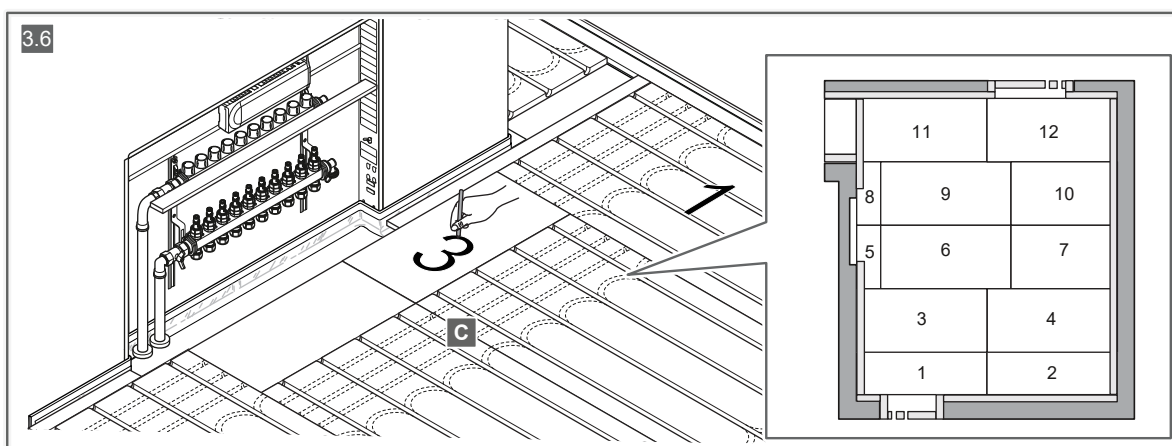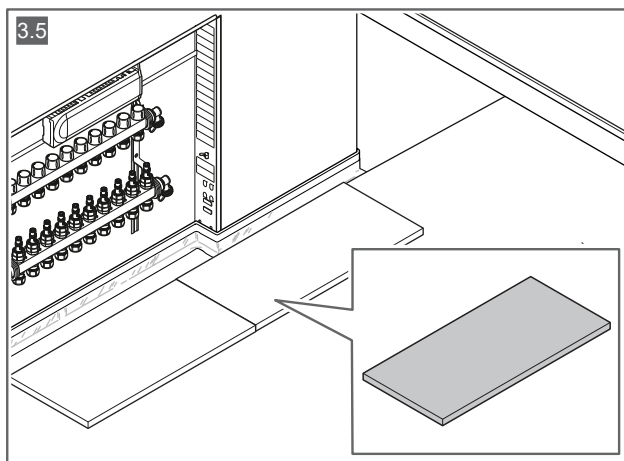


S10001012


3




3.11

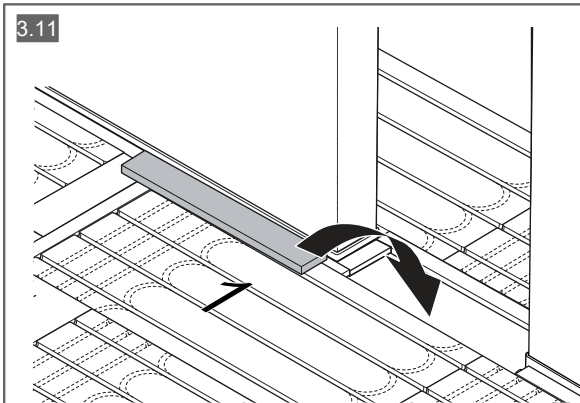


3.12

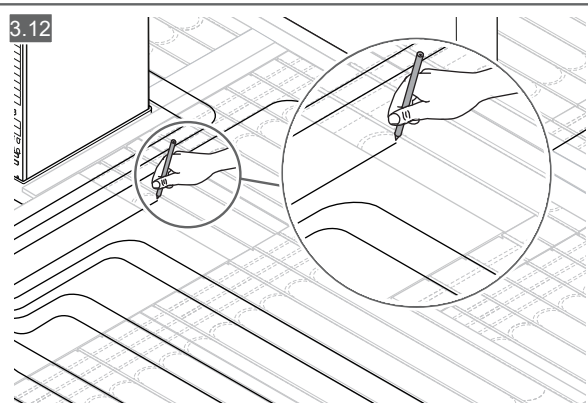


3.13

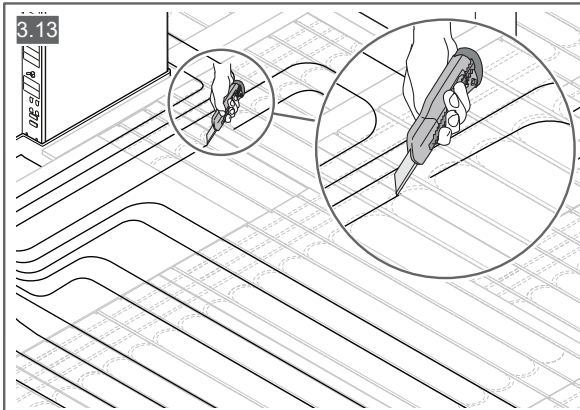





3.14

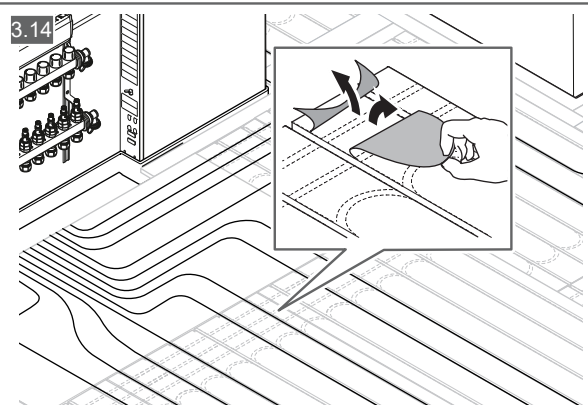







3.15







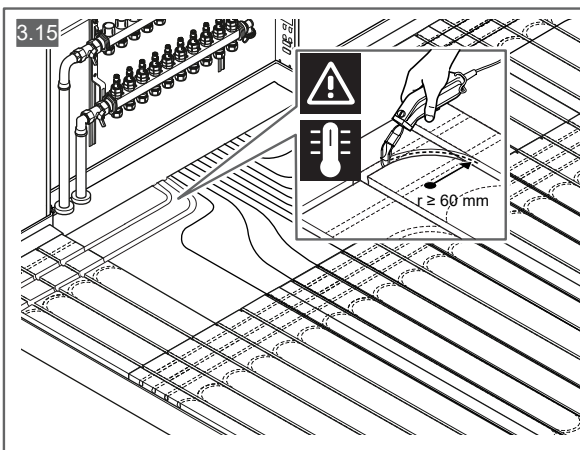











3.16

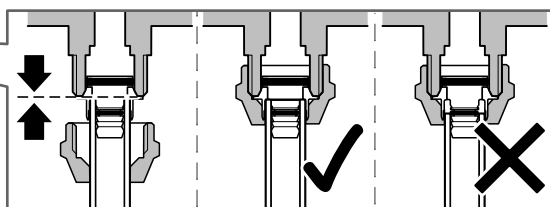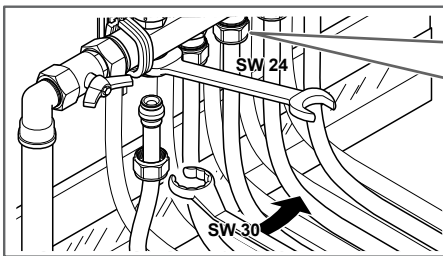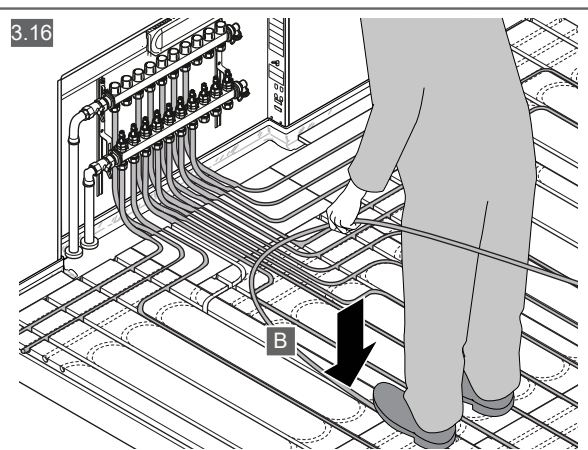



S10001013

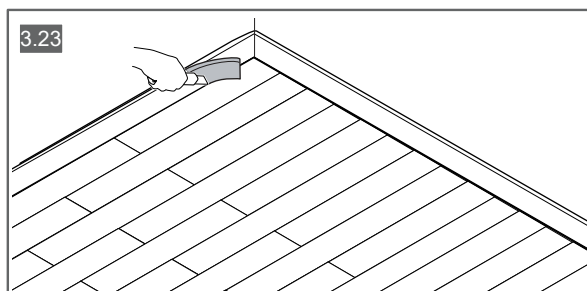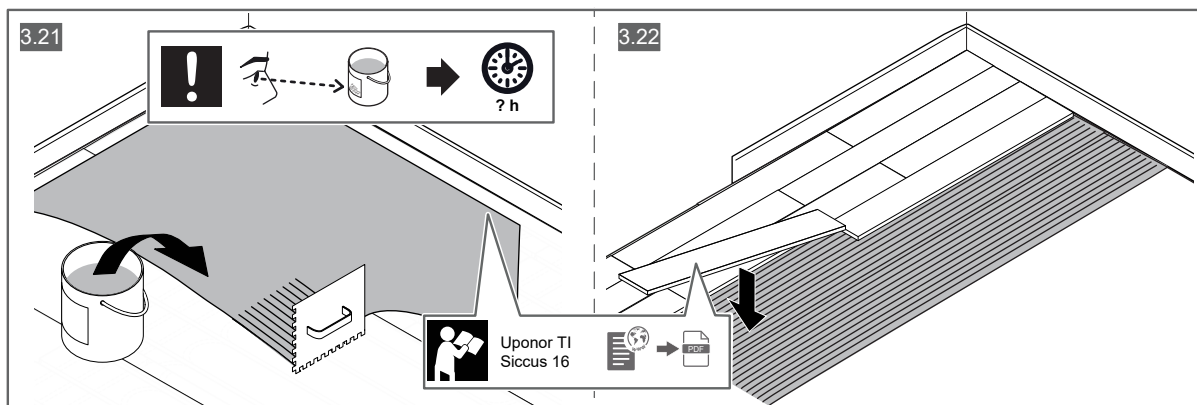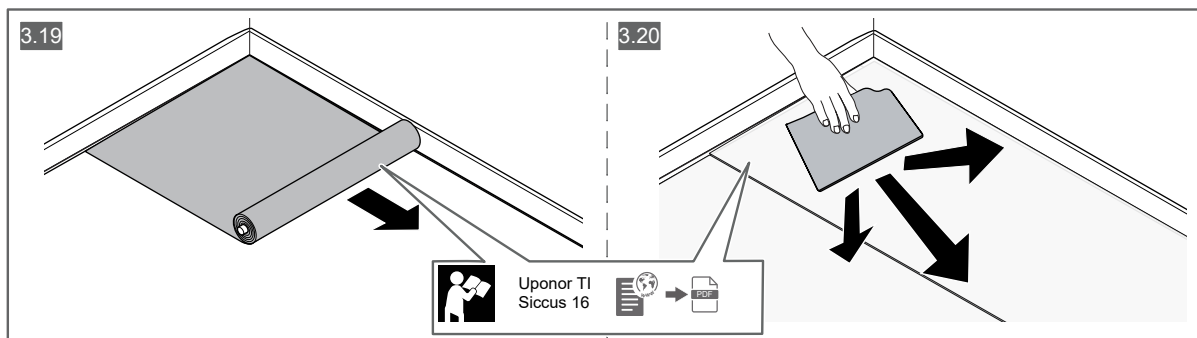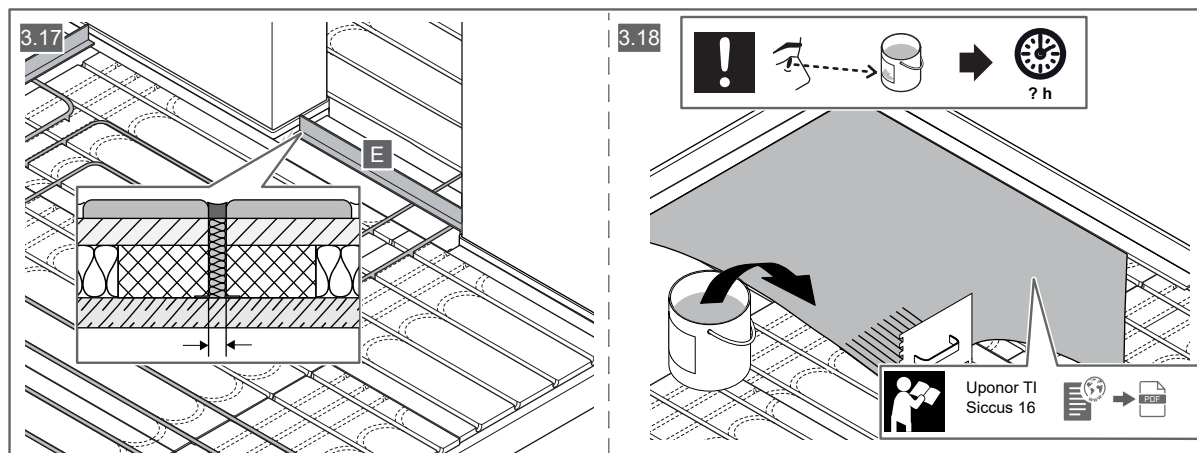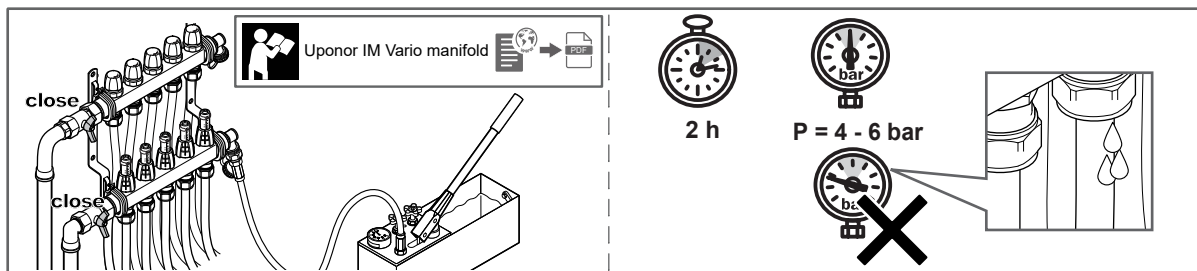

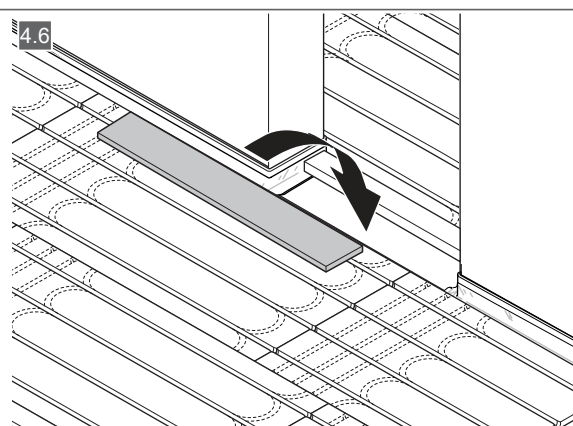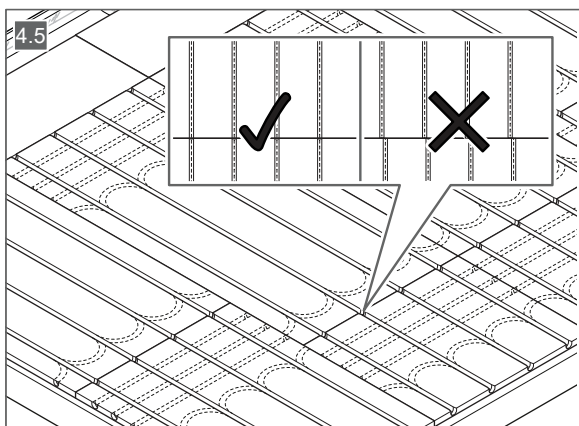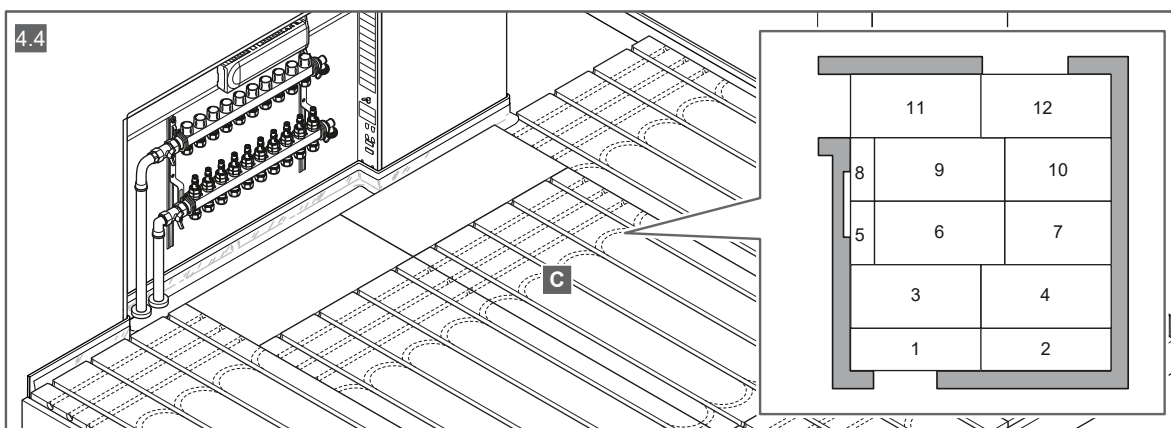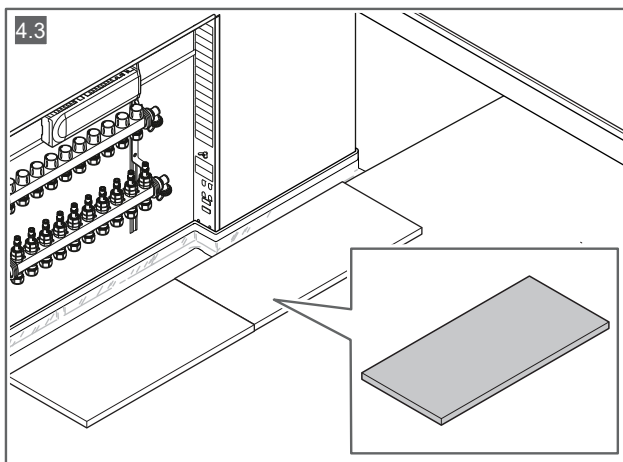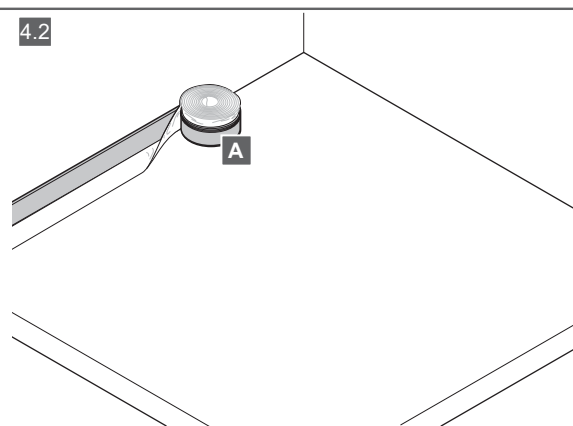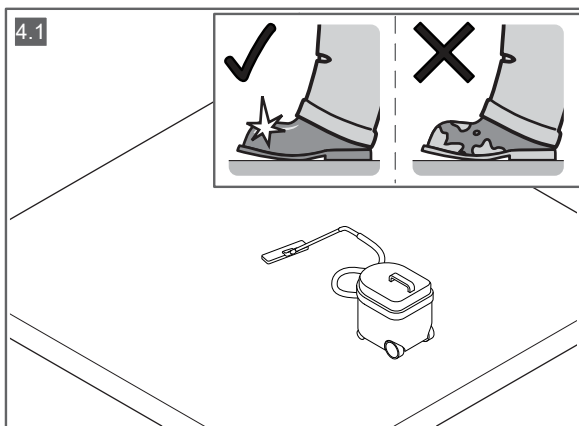

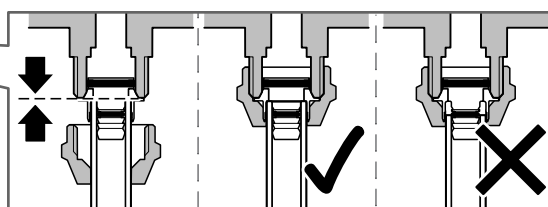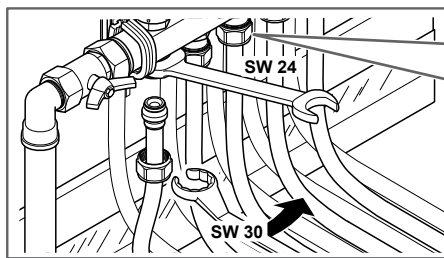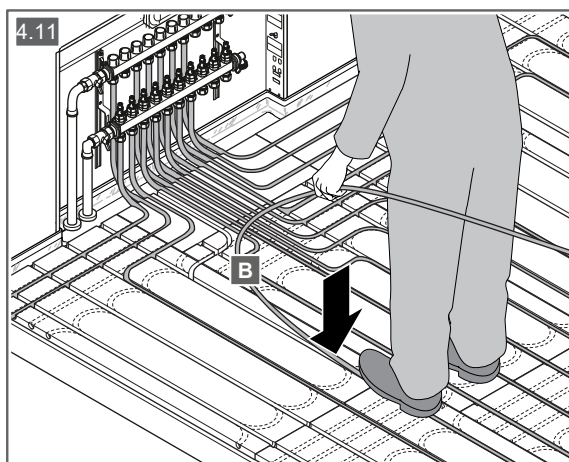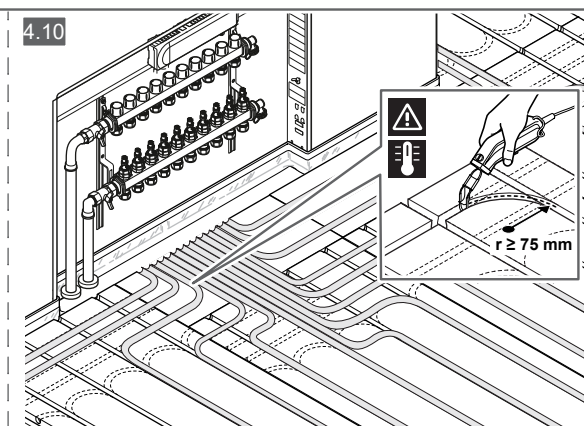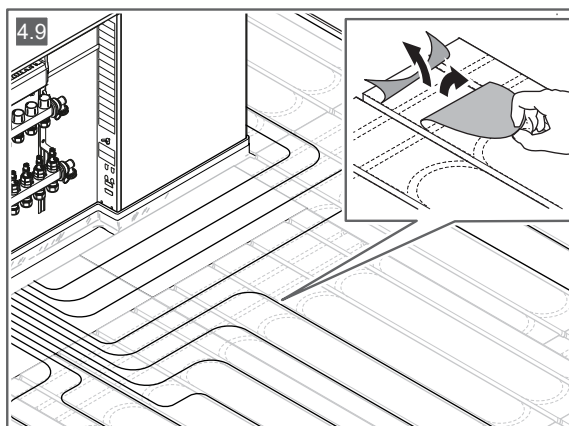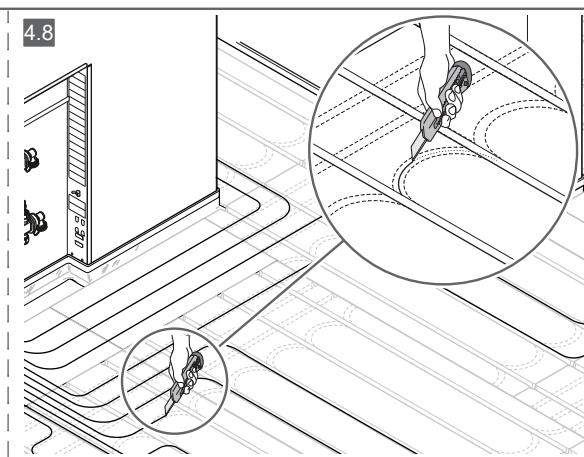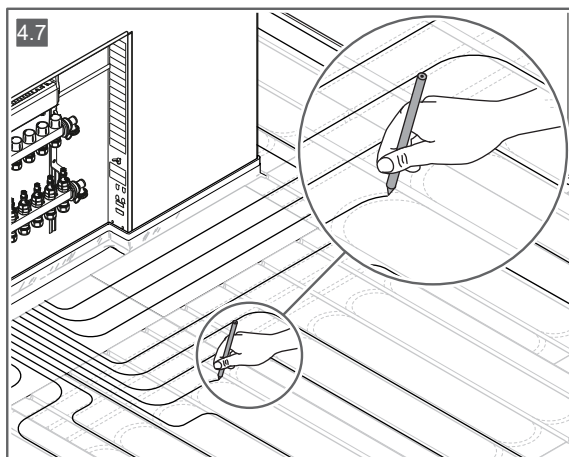






4

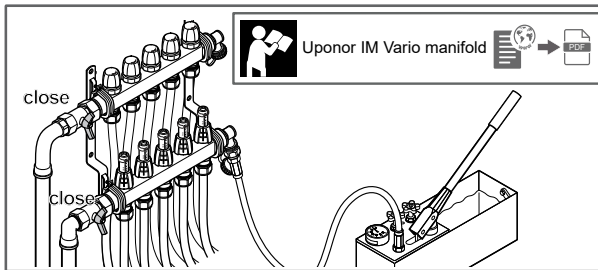

2 h






P = 4 - 6 bar

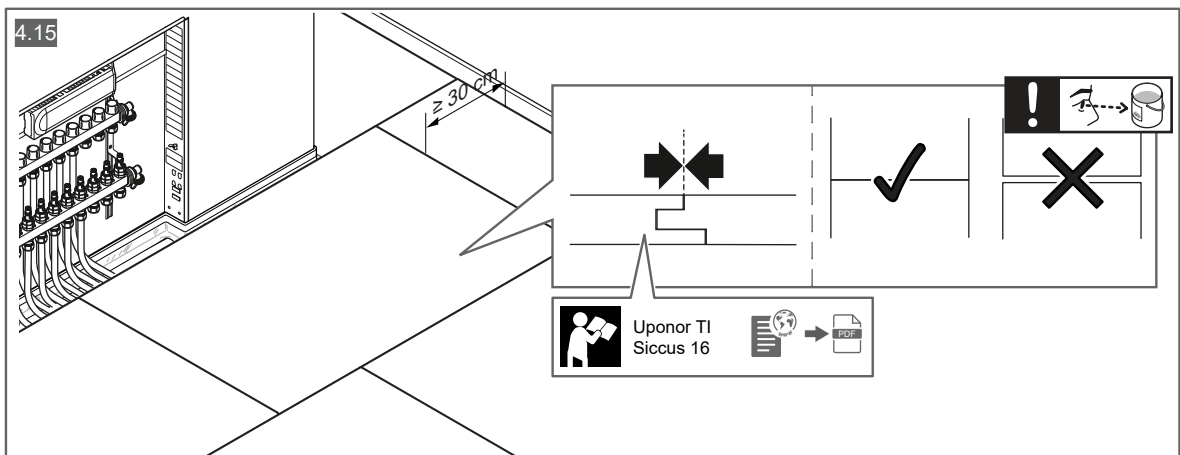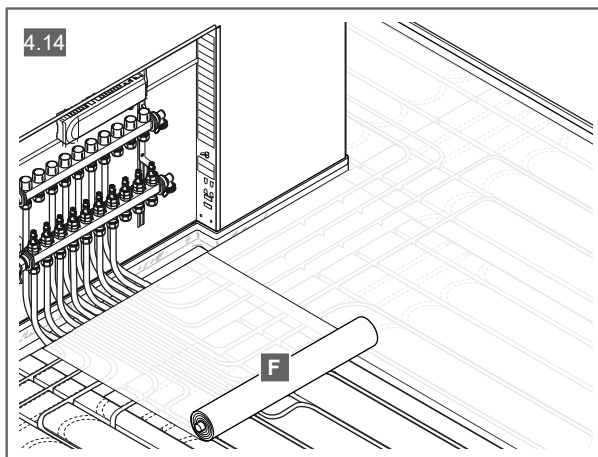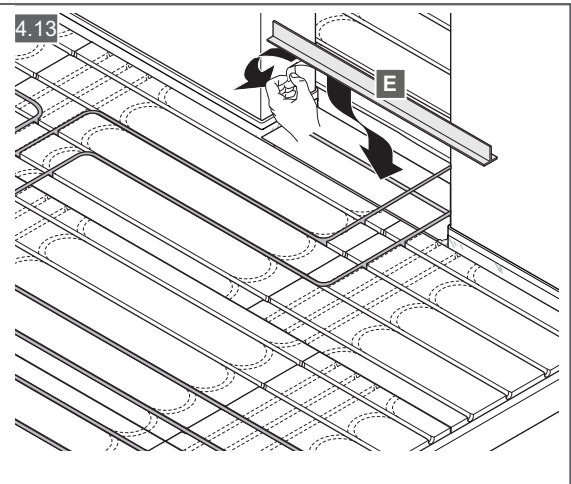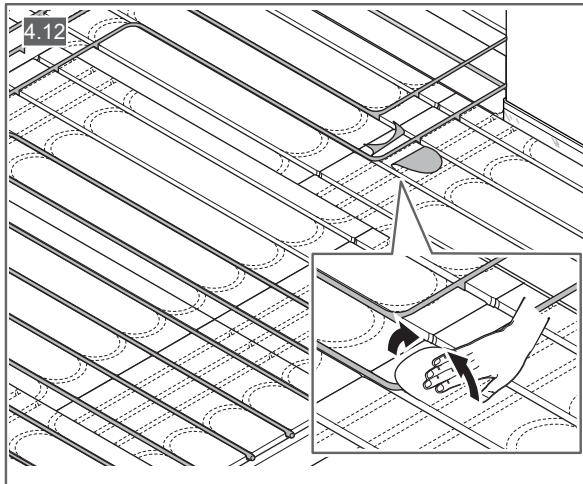

SI0000845

4

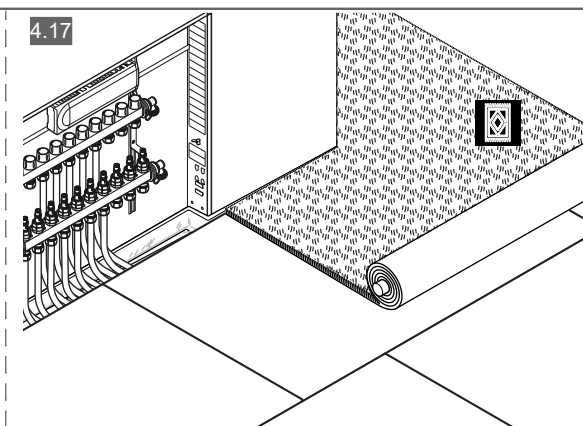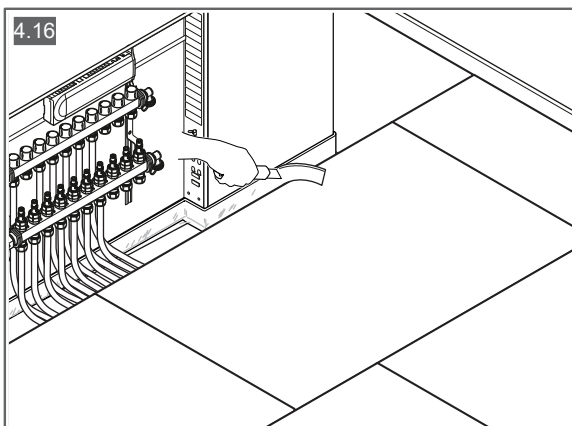

Georg Fischer GmbH

Amsler-Laffon-Straße 9
8201 Schaffhausen, Switzerland

1145905 v2_08_2026
GF DCO/JLI

Uponor reserves the right to change the product portfolio and the related documentation without prior notification, in line with its policy of continuous improvement and development.



www.uponor.com