



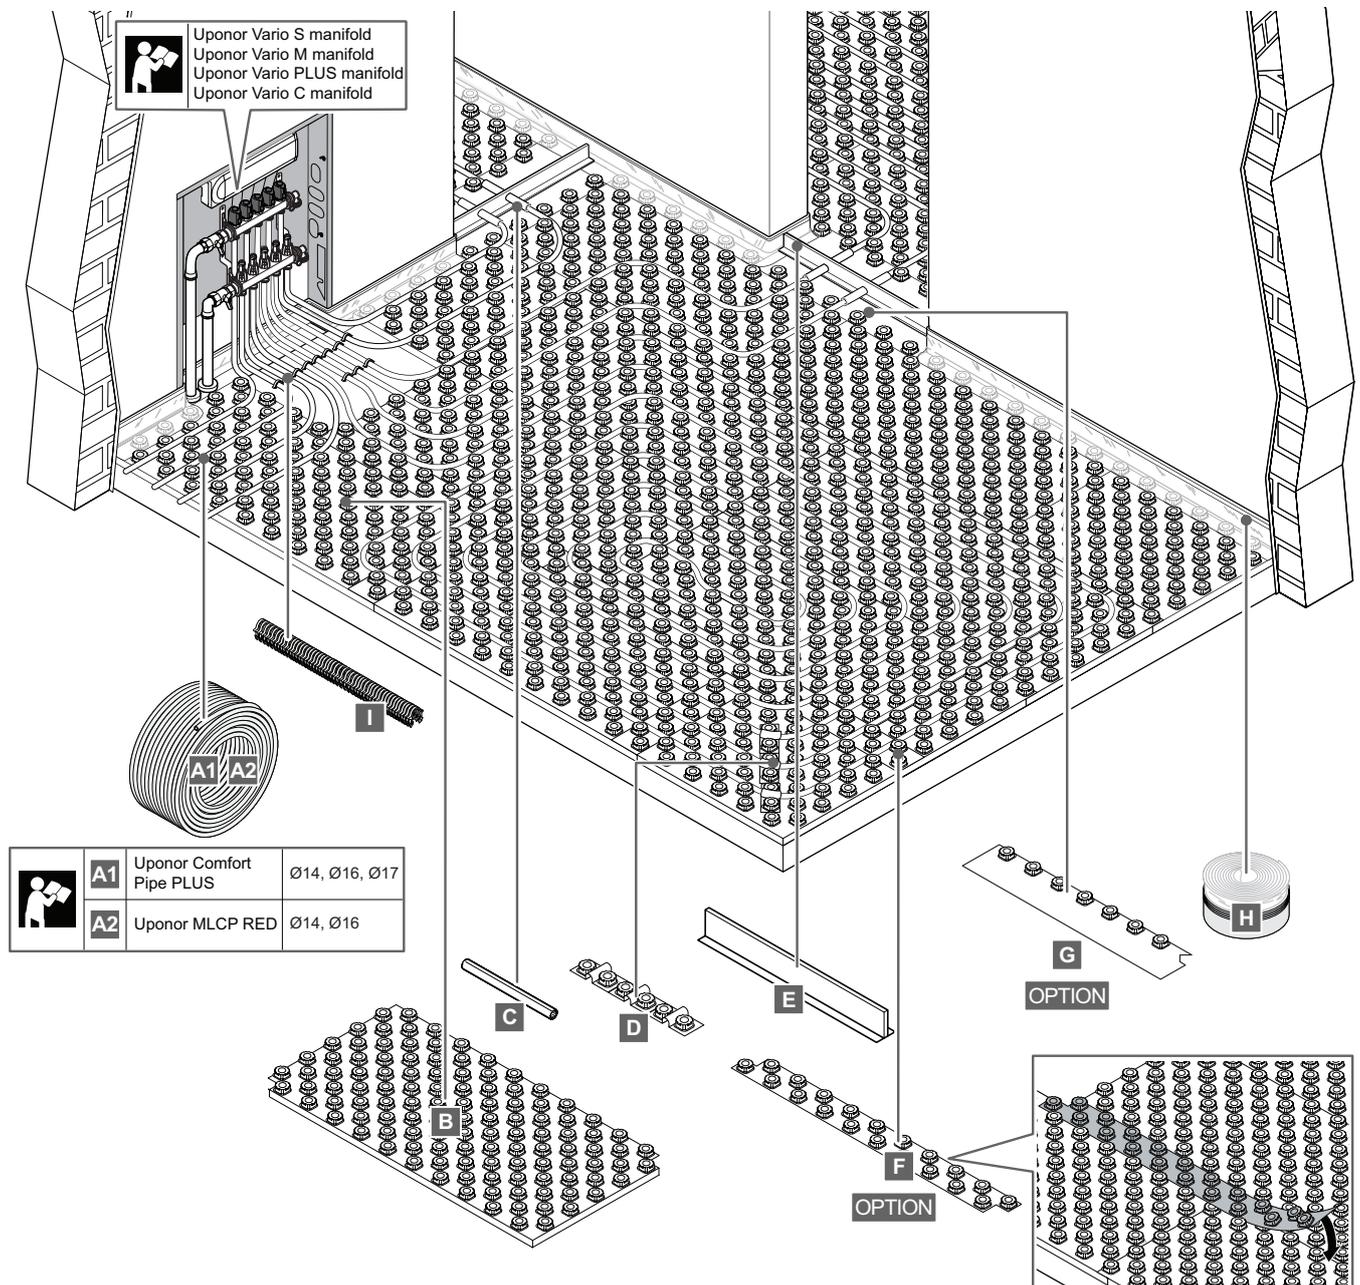
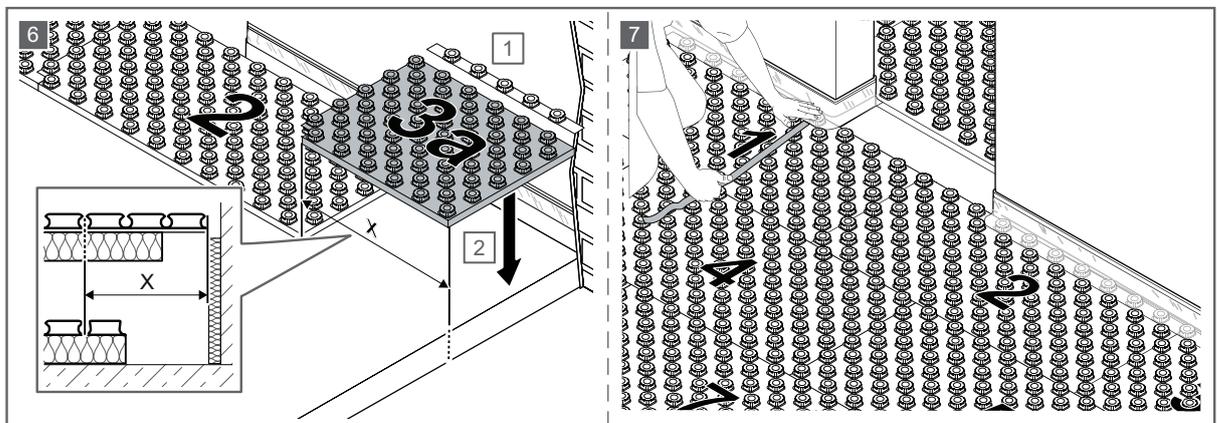
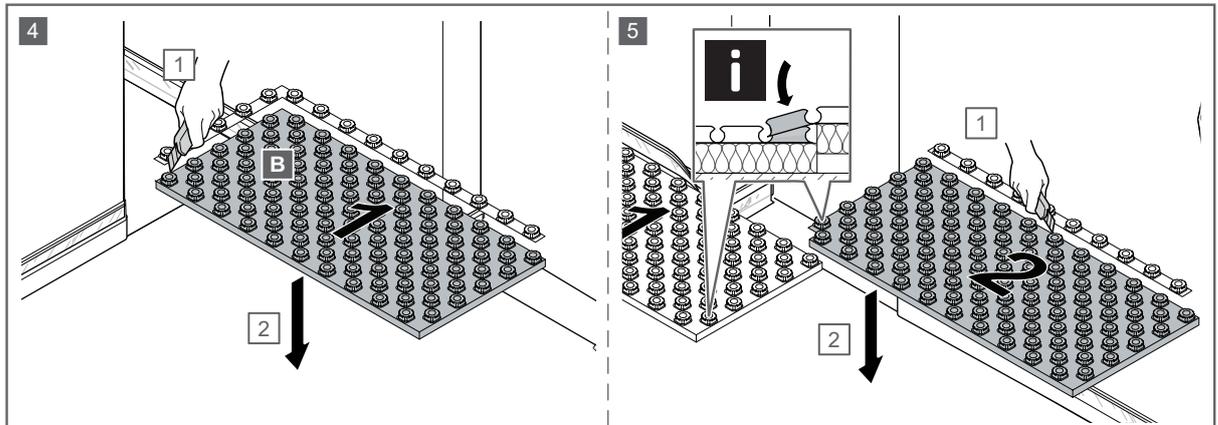
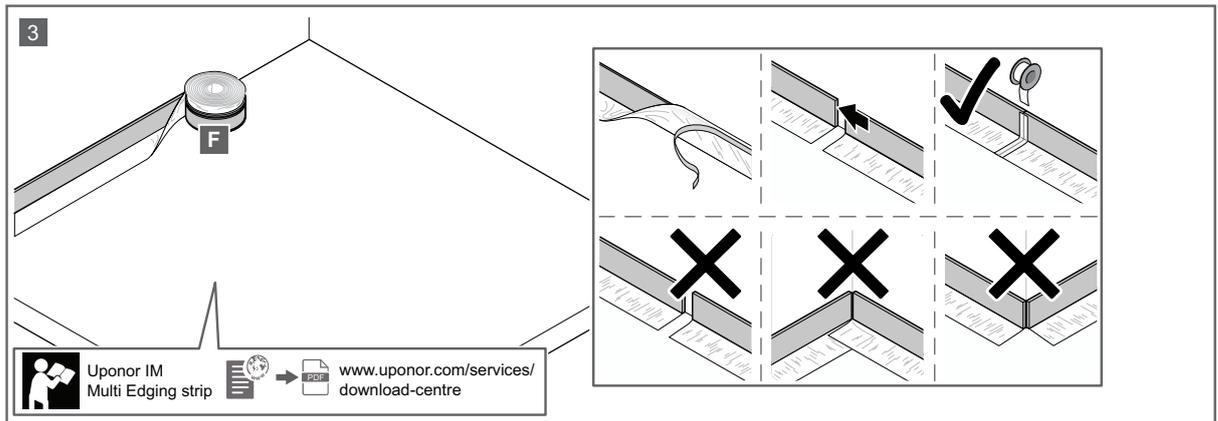
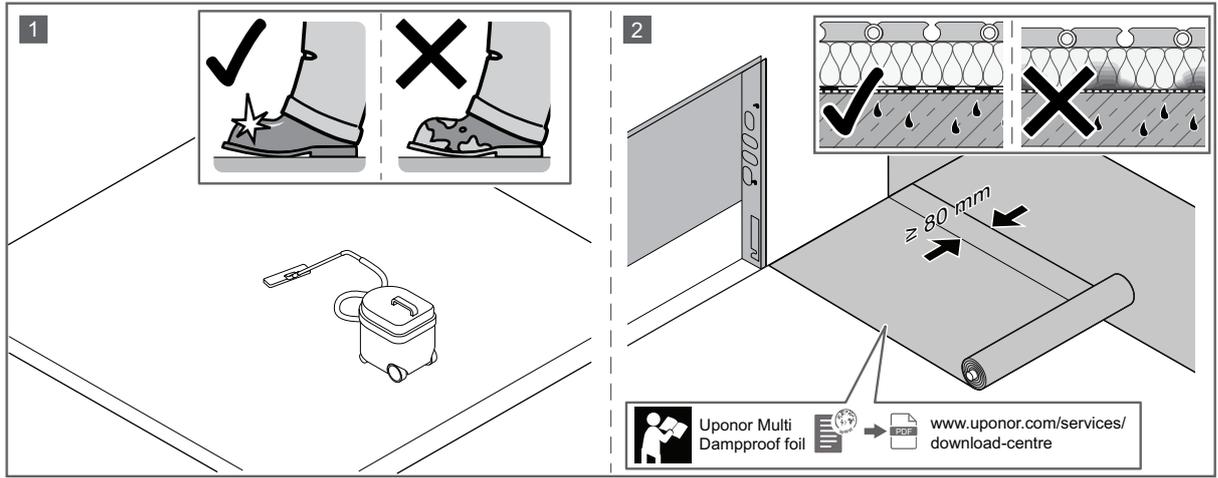
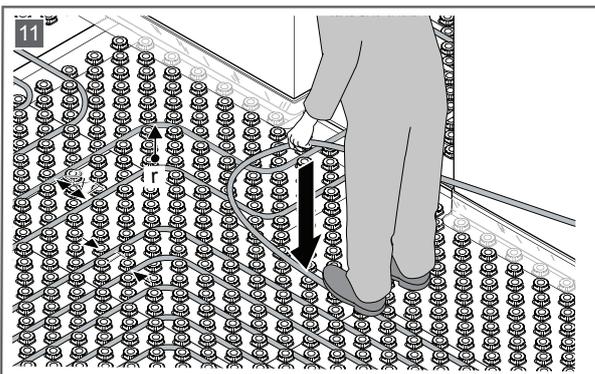
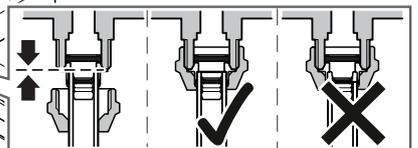
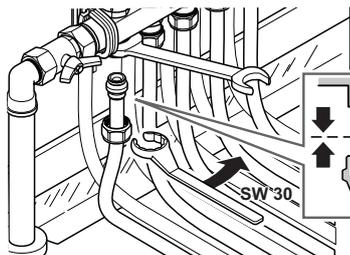


Uponor Tecto

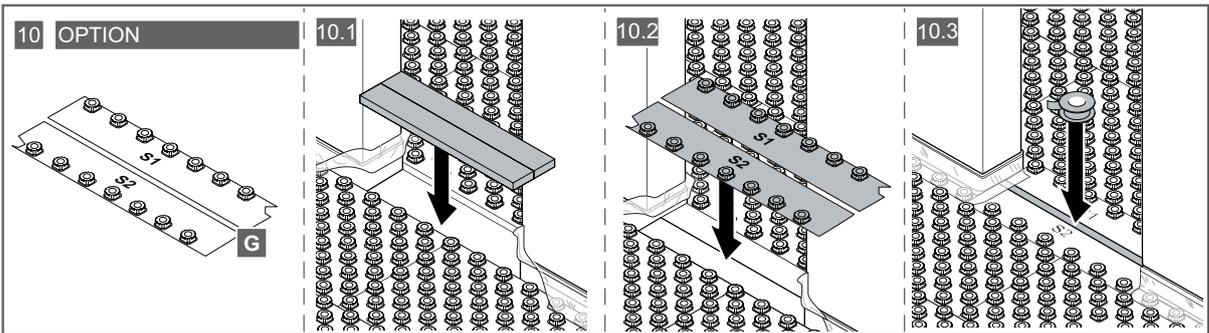


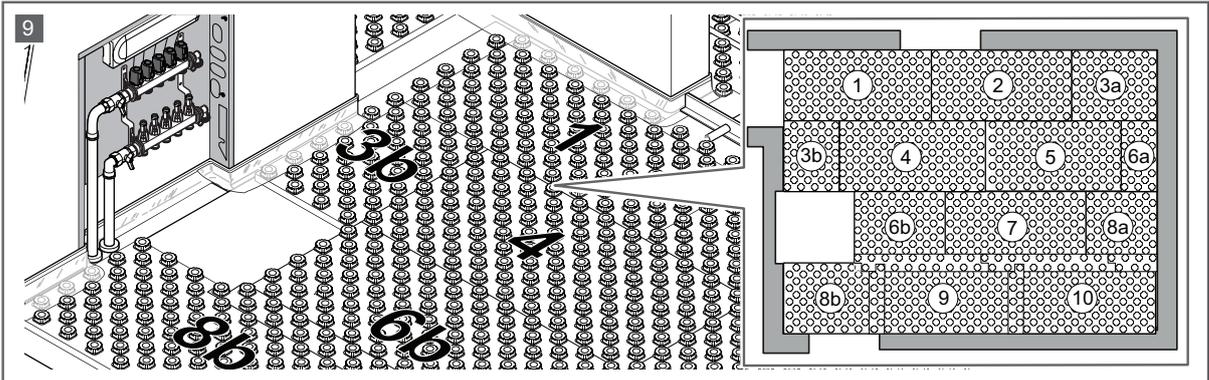






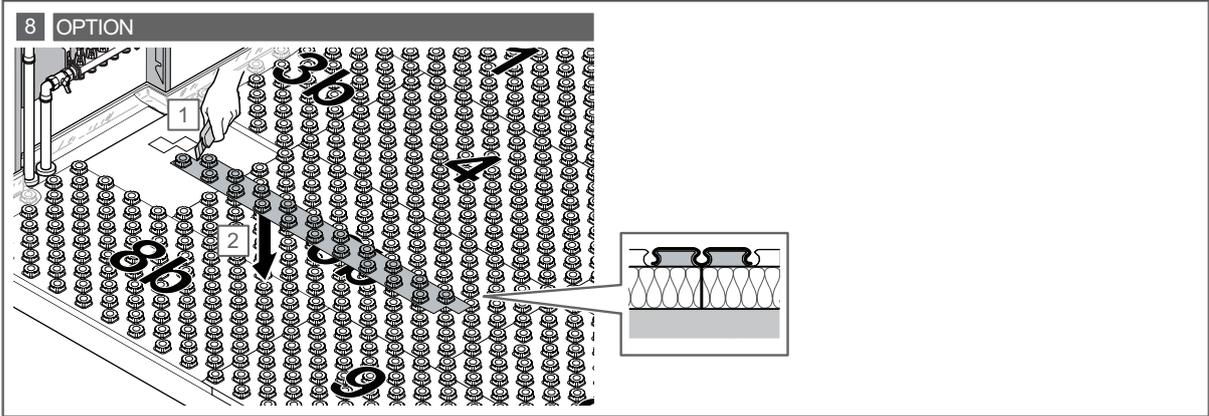


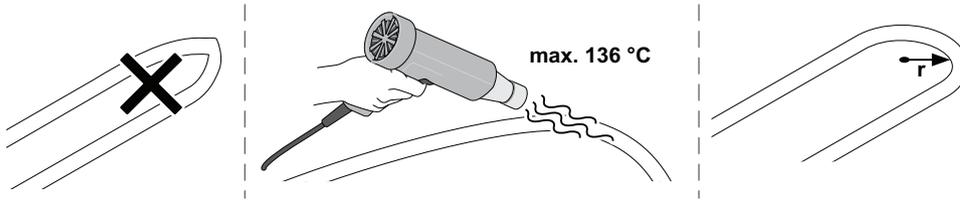

A1	Ø14	≥ 7,0 mm
	Ø16	≥ 8,0 mm
	Ø17	≥ 8,5 mm
A2	Ø14	≥ 4,5 mm
	Ø16	≥ 5,0 mm




EN 1264

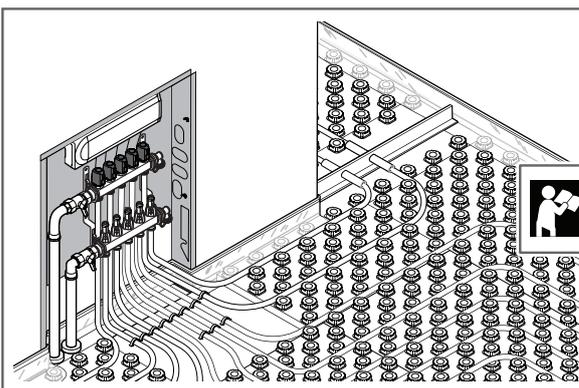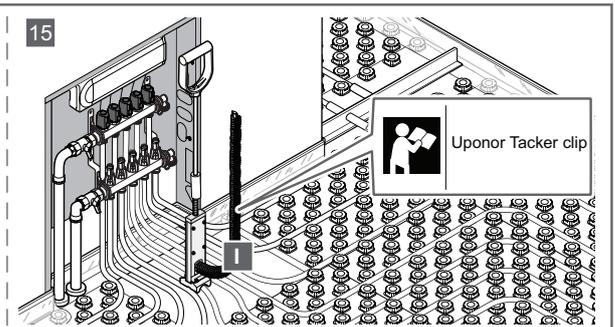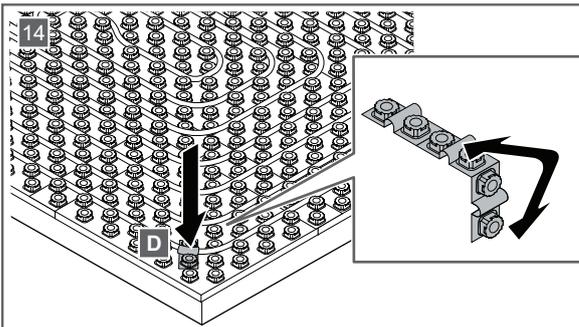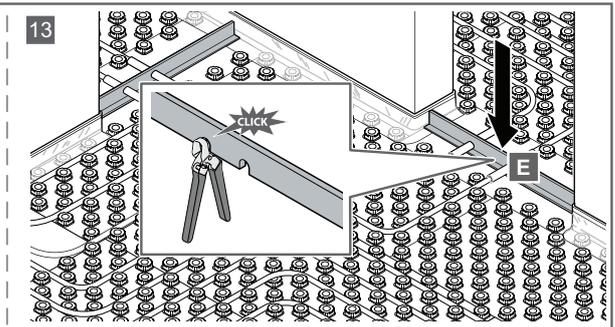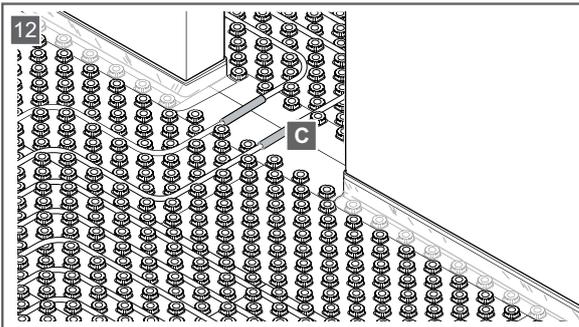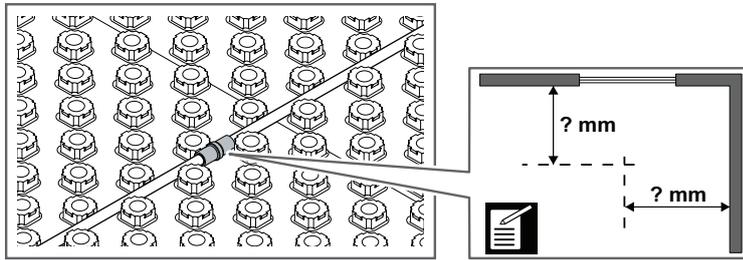

Uponor Vario S manifold
 Uponor Vario M manifold
 Uponor Vario PLUS manifold
 Uponor Vario C manifold




www.uponor.com/services/download-centre

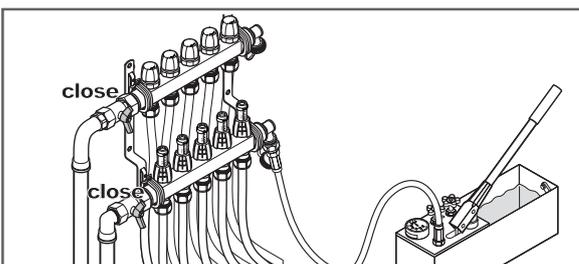

2 h



P = 4 – 6 bar



Uponor GmbH

Industriestraße 56,
D-97437 Hassfurt, Germany

1187744 v2_02_2026
Production: GF / SKA_ASP

Uponor reserves the right to make changes, without prior notification,
to the specification of incorporated components in line with its policy
of continuous improvement and development.



www.uponor.com