



Solid PP gravity sewer pipe


Technical datasheet

uponor



Solid PP

Gravity sewer pipe

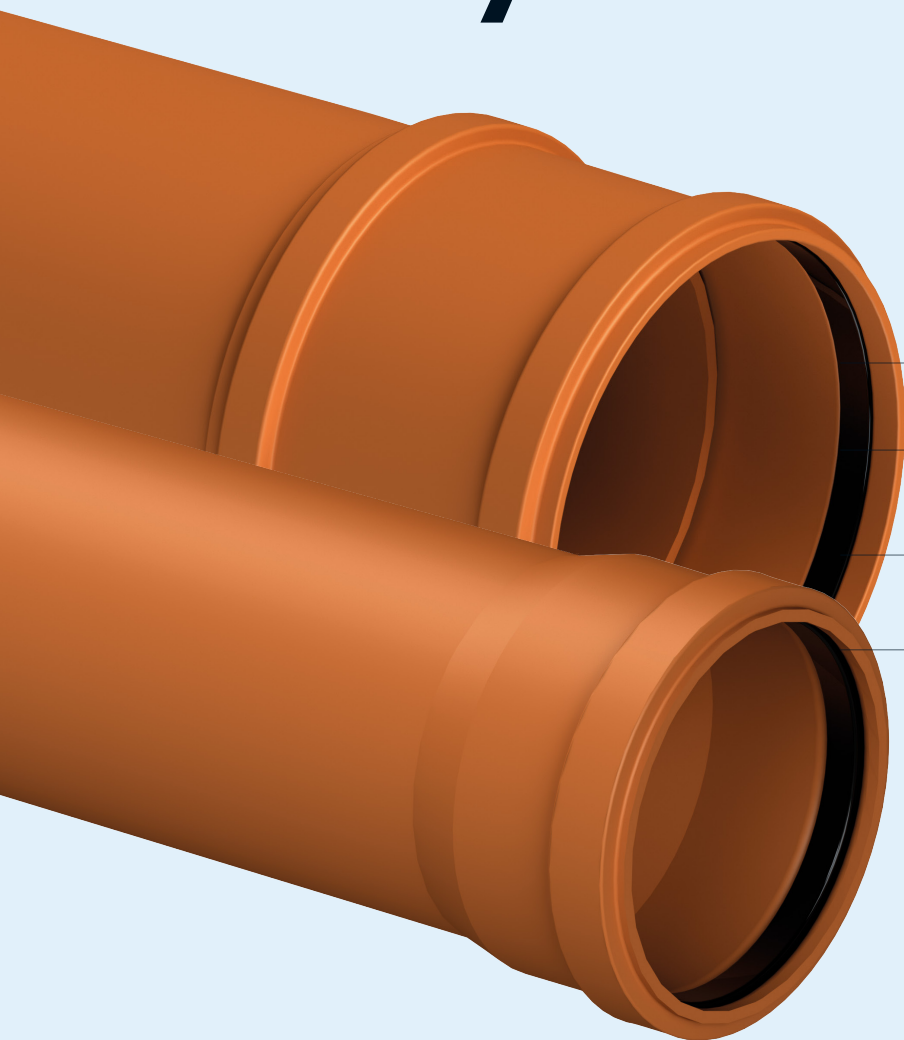

Impact resistant

Corrosion free

Solid wall pipe

Nordic Poly Mark


Solid PP gravity sewer pipe


Uponor Solid PP is a smooth pipe system for gravity sewer applications. It is Nordic Poly Mark (NPM) approved and it fulfills the demands of EN 1852. As required by the standard, the same red brown colour continues through the whole wall. Pipes are impact-resistant, even in cold weather, and can be installed also in wintertime. The system is corrosion free with good abrasion resistance. Ring stiffness is SN8 and the pipes can stand traffic load. Uponor fitting systems for smooth pipes can be used with Solid PP. Pipes are available in dimensions 110–400mm.

Application	Gravity sewer
Material	Polypropylene, SN8
Ring stiffness	SN8
Colour	Red brown
Dimensions	Ø110–400mm: 6 m and 3 m
Sockets	110–160mm: Inline socket 200–400mm: Double socket
Sealing ring	Oil resistance sealing
Standarder	Nordic Poly Mark EN 1852


Properties


Smooth PP pipe with inline socket, SN8

	Uponor no	De mm	Length mm	De max mm	M mm
	1144947	110	3000	127	58
	1144948	110	6000	127	58
	1144949	160	3000	184	82
	1144950	160	6000	184	82



Smooth PP pipe with double socket, SN8

	Uponor no	De mm	Length mm	De max mm	M mm
	1144951	200	3000	216	81
	1144952	200	6000	216	81
	1144953	250	3000	273	125
	1144954	250	6000	273	125
	1144955	315	3000	339	147
	1144956	315	6000	339	147
	1144957	400	3000	427	168
	1144958	400	6000	427	168

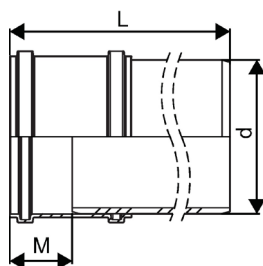

**Moving
> Water**

uponor

Uponor Corporation

Ilmalantori 4
00240 Helsinki
Finland

W www.uponor.com