


New Uponor S-Press PLUS connection fittings for connection to components for energy-efficient heating of drinking water and heating systems

The new S-Press PLUS adapters in dimension 32 enable the transfer of larger volume flows directly from heat generators such as heat pumps with the Uponor UniPipe & S-Press system.

The new Uponor S-Press PLUS articles allow connections without additional components, which leads to a significant reduction in working time and material costs.

Articles

	1161264	Uponor S-Press PLUS adapter female thread 32-R 1/2" FT Designed for directly connecting 1/2" components such as drain cocks or bleed valves.
	1161265	Uponor S-Press PLUS adapter swivel nut 32-G1 1/2" SN Screw connection of flat-sealing components with 1 1/2" external thread, such as circulation pumps or components in drinking water installations.
	1161266	Uponor S-Press PLUS elbow male thread 32-R 3/4" MT For simple connection to 3/4" male thread, for example small buffer tanks.
	1161267	Uponor S-Press PLUS elbow swivel nut 32-G1" SN Screw connection of flat-sealing components with 1" external thread, for example to heat pumps.

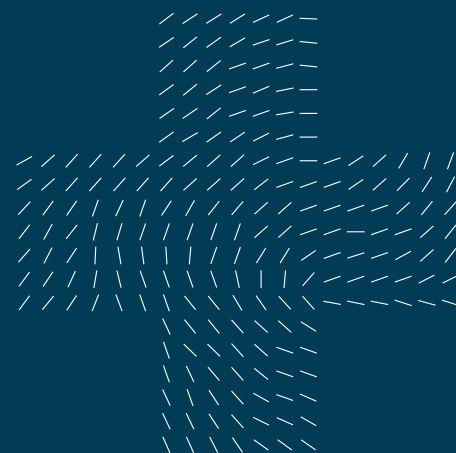

All items have the S-Press Plus features:

- Unique press indicator made of tin plated brass (lead free)
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation – Fast diameter recognition
- Accurate test safety function
- Flow rate optimized fitting body



Visit [uponor.com](https://www.uponor.com) to learn more.

Leading with Water

Uponor Corporation
Ilmalantori 4
00240 Helsinki
Finland