

Silenta Product Family

Silenta Extreme
Silenta Premium
Silenta FR
Silenta 3A



+GF+



Table of Contents

About GF Hakan Plastik	4-5
About Plastics	6-7
Certification Details	8-9
Silenta Extreme Fire Resistant and Noise-insulated Halogen Free Piping Systems	10-15
Silenta Premium Sound-Insulated Piping Systems	16-23
Silenta 3A Sound-Insulated Piping Systems	24-29
Silenta FR Fire Resistant and Sound-Insulated Piping Systems	30-35
Building Technology (BT) Soil and Waste Water Pipe Range Installation Instructions	36-41
Packing, Stocking and Shipment	
• Packaging	43
• Storage	44
• Transportation	45

About Us





Founded in Switzerland in 1802, Georg Fischer Corporation operates in 3 main business lines: GF Piping Systems, GF Casting Solutions and GF Machining Solutions. Georg Fischer is present in 34 countries with 57 production plants and 136 companies.

GF Piping Systems, the largest business line of Georg Fischer Corporation, is one of the leading companies in plastic and metal piping systems in the world. GFPS produces system solutions and high quality components for the secure transmission of water and gas in industries, utilities and building technology. Reaching out to over 100 countries with its more than 30 production plants, GF Piping Systems acquired **Hakan Plastik** in 2013.

Founded in 1965, **Hakan Plastik** has achieved so many breakthroughs as the first company that produced the silent pipe in Turkey and has reflected the importance that it attaches to development and change to its products and services as well.

GF Hakan Plastik has two production plants in Çerkezköy and Şanlıurfa. With the acquisition by GF, global GF product and process standards applicable worldwide have started to be applied. **GF Hakan Plastik** operates in the fields of Building Technology (BT) and Utility (UT) in plastic piping sector. Exporting its products to over 70 countries, the company has 7 sales areas in Turkey.

GF Hakan Plastik Training and Technology Center provides all its business partners with services with the aim of increasing the knowledge and awareness in the sector through both technical and practical trainings. Reaching out to a wider audience at the center such as the professionals serving the sector, university students and installers and providing diverse training and seminar programs for each stakeholder; the products of **GF Hakan Plastik** are promoted and information is provided about the accurate method of application of the products.

+ Our Market Segments

Based on its experience and high production technology in the sector, GF Hakan Plastik supports its clients in each phase of their projects.

- Building Technology Projects
- Utility Projects
- Industrial Buildings
- Irrigation Projects

+ Complete Solution Concept

Our wide range of products and services represent our complete solution concept.

With our products intended for diverse sectors, we offer individual and comprehensive system solutions. Focusing on the needs of projects, we optimize the processes and applications integrated into the entire system.

We provide state-of-the-art technology by setting the standards in the market at all times. We always stand by our business partners through our experience in the piping systems and reliable service network.

As an industrial company that stands out with innovative and successful operations ever since our incorporation, we act as a solution point to meet all your needs based on our technical knowledge, specialization and reliability.

+ Our Presence in the World

With our presence as a global brand, we choose to be closer to our clients.

GF Hakan Plastik exports its products to over 70 countries. As Georg Fischer Piping Systems, we provide our clients in over 100 countries with fast response and services.

We act in compliance with the local standards in our over 30 production plants in Europe, Asia and the USA. We ensure fast deliveries with our modern logistics organization deployed at our local distribution hubs..

+ Benefits of Plastics

Plastics are polymers created by the chemical conversion of natural products or synthesized from organic materials. The primary components that make up the building blocks of plastics are long chains of carbon (C) and hydrogen (H) known as monomers.

The raw materials used for the production of plastics are natural compounds such as cellulose, coal, oil and natural gas. In the plastics industry, around 6 % of the petroleum products that come out from refineries is used.

Plastics fall into three main categories on the basis of their internal structure and the resulting mechanical characteristics: thermoplastics, thermosetting plastics and elastomers.

Thermoplastics in turn can be split into two main categories as partially-regulated (semi-crystalline) and irregular (amorphous) molecular structures.

- Semicrystalline thermoplastics, which have a partially ordered molecular structure: this category includes the polyolefins (polypropylene, polyethylene, polybutylene) and fluoropolymers (PVDF, PTFE, etc.)
- Amorphous thermoplastics, which have no crystalline regions and no packed molecular structure: this category includes the vinyl chlorides (PVC-U, PVC-C, etc.) and styrenes (ABS, polystyrene, etc.)

Semicrystalline materials are more suitable for hot welding, while amorphous thermoplastics are ideal for cementing or cold welding (solvent cementing).

+ Advantages of Plastics

Thermoplastics obviously demonstrate different characteristics than those of the metals traditionally used for piping.

Metal Systems

High density

- * Crane needed for transport
- * Widely spaced fixings
- * High anchoring forces, fixing required

Thermal conductivity

- * Insulation is always needed to limit heat loss
- Formation of condensation and resulting corrosion *

Corrosion Behaviors

- Galvanic corrosion may occur
- Internal diameter is reduced due to corrosion
Reduction in internal diameter leads to pressure losses

Chemical resistance

- * Low resistance to acids, requiring use of costly alloys
- * Damage from incrustation

Plastic Systems

Low density

- * Can be carried by hand up to d110
- * Closely spaced fixings
- * Limited anchoring forces, simple and economic

Low thermal conductivity

- * Limited heat loss
- Low levels of condensation and resistance to corrosion

High Corrosion Resistance

- No risk of galvanic corrosion risk
- No corrosion and reduction of internal diameter
No pressure losses due to lack of reduction of internal diameter

High chemical resistance

- * In combination with correct jointing methods, at least 25 years of useful life can be warranted
- * No incrustation


+ Service Life Analysis of Plastics

It is the total of all greenhouse gases emitted to the atmosphere during the entire lifetime including the processes for extracting a product having carbon footprint from under the ground, refining, producing, using and disposing of that product.


The following graphics indicate the assessment of the lifetime of thermoplastic piping systems in terms of the quality of their environmental performance and application of them in building technology, industry and water and gas distribution. In the analysis, the impacts of one meter long pipe was compared with the main competitor materials (DN25, DN80, DN150 and DN400) for each of the commonly used plastics. GF supplied this analysis from an independent, Swiss-based organization specialized in environmental performance analyzes, and is based on Ecoinvent, leading lifecycle inventory database in the world.

According to the main results of the study, plastic piping systems demonstrate better performance than metal systems. This finding has been confirmed by other studies conducted in this field.

The main reason for high performance of thermoplastics is that they are lightweight. This ensures key benefits during transport and installation. Fully-plastic solutions are lighter than other piping systems of conventional materials, and this creates significant impacts on carbon footprint.

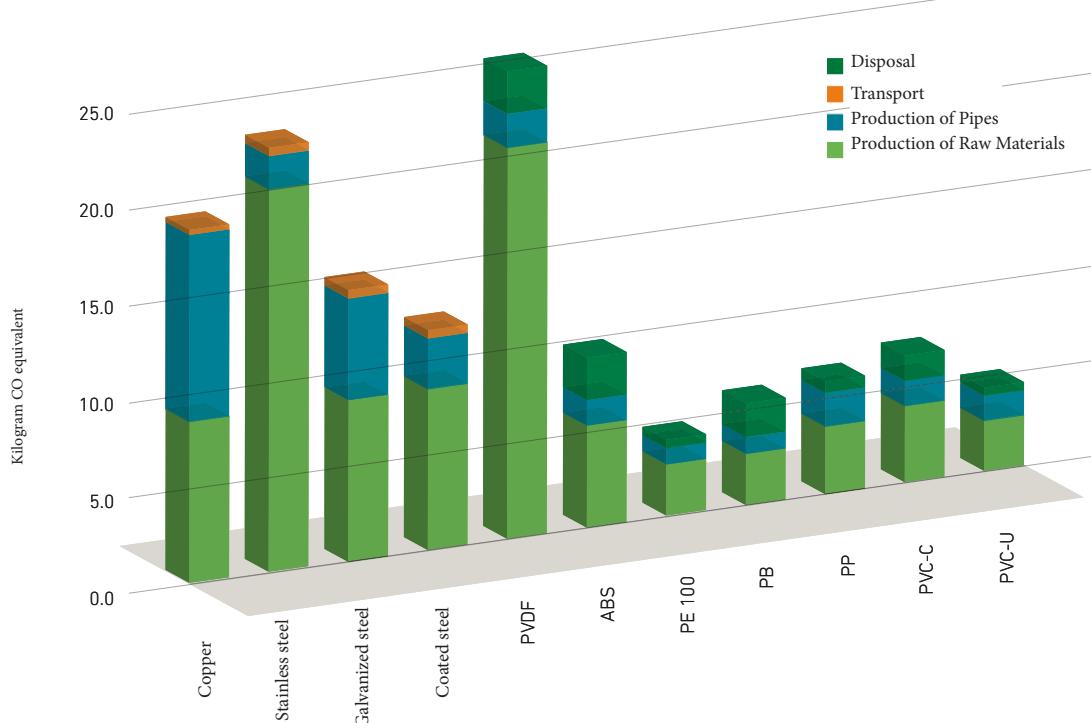

Quality Certificates

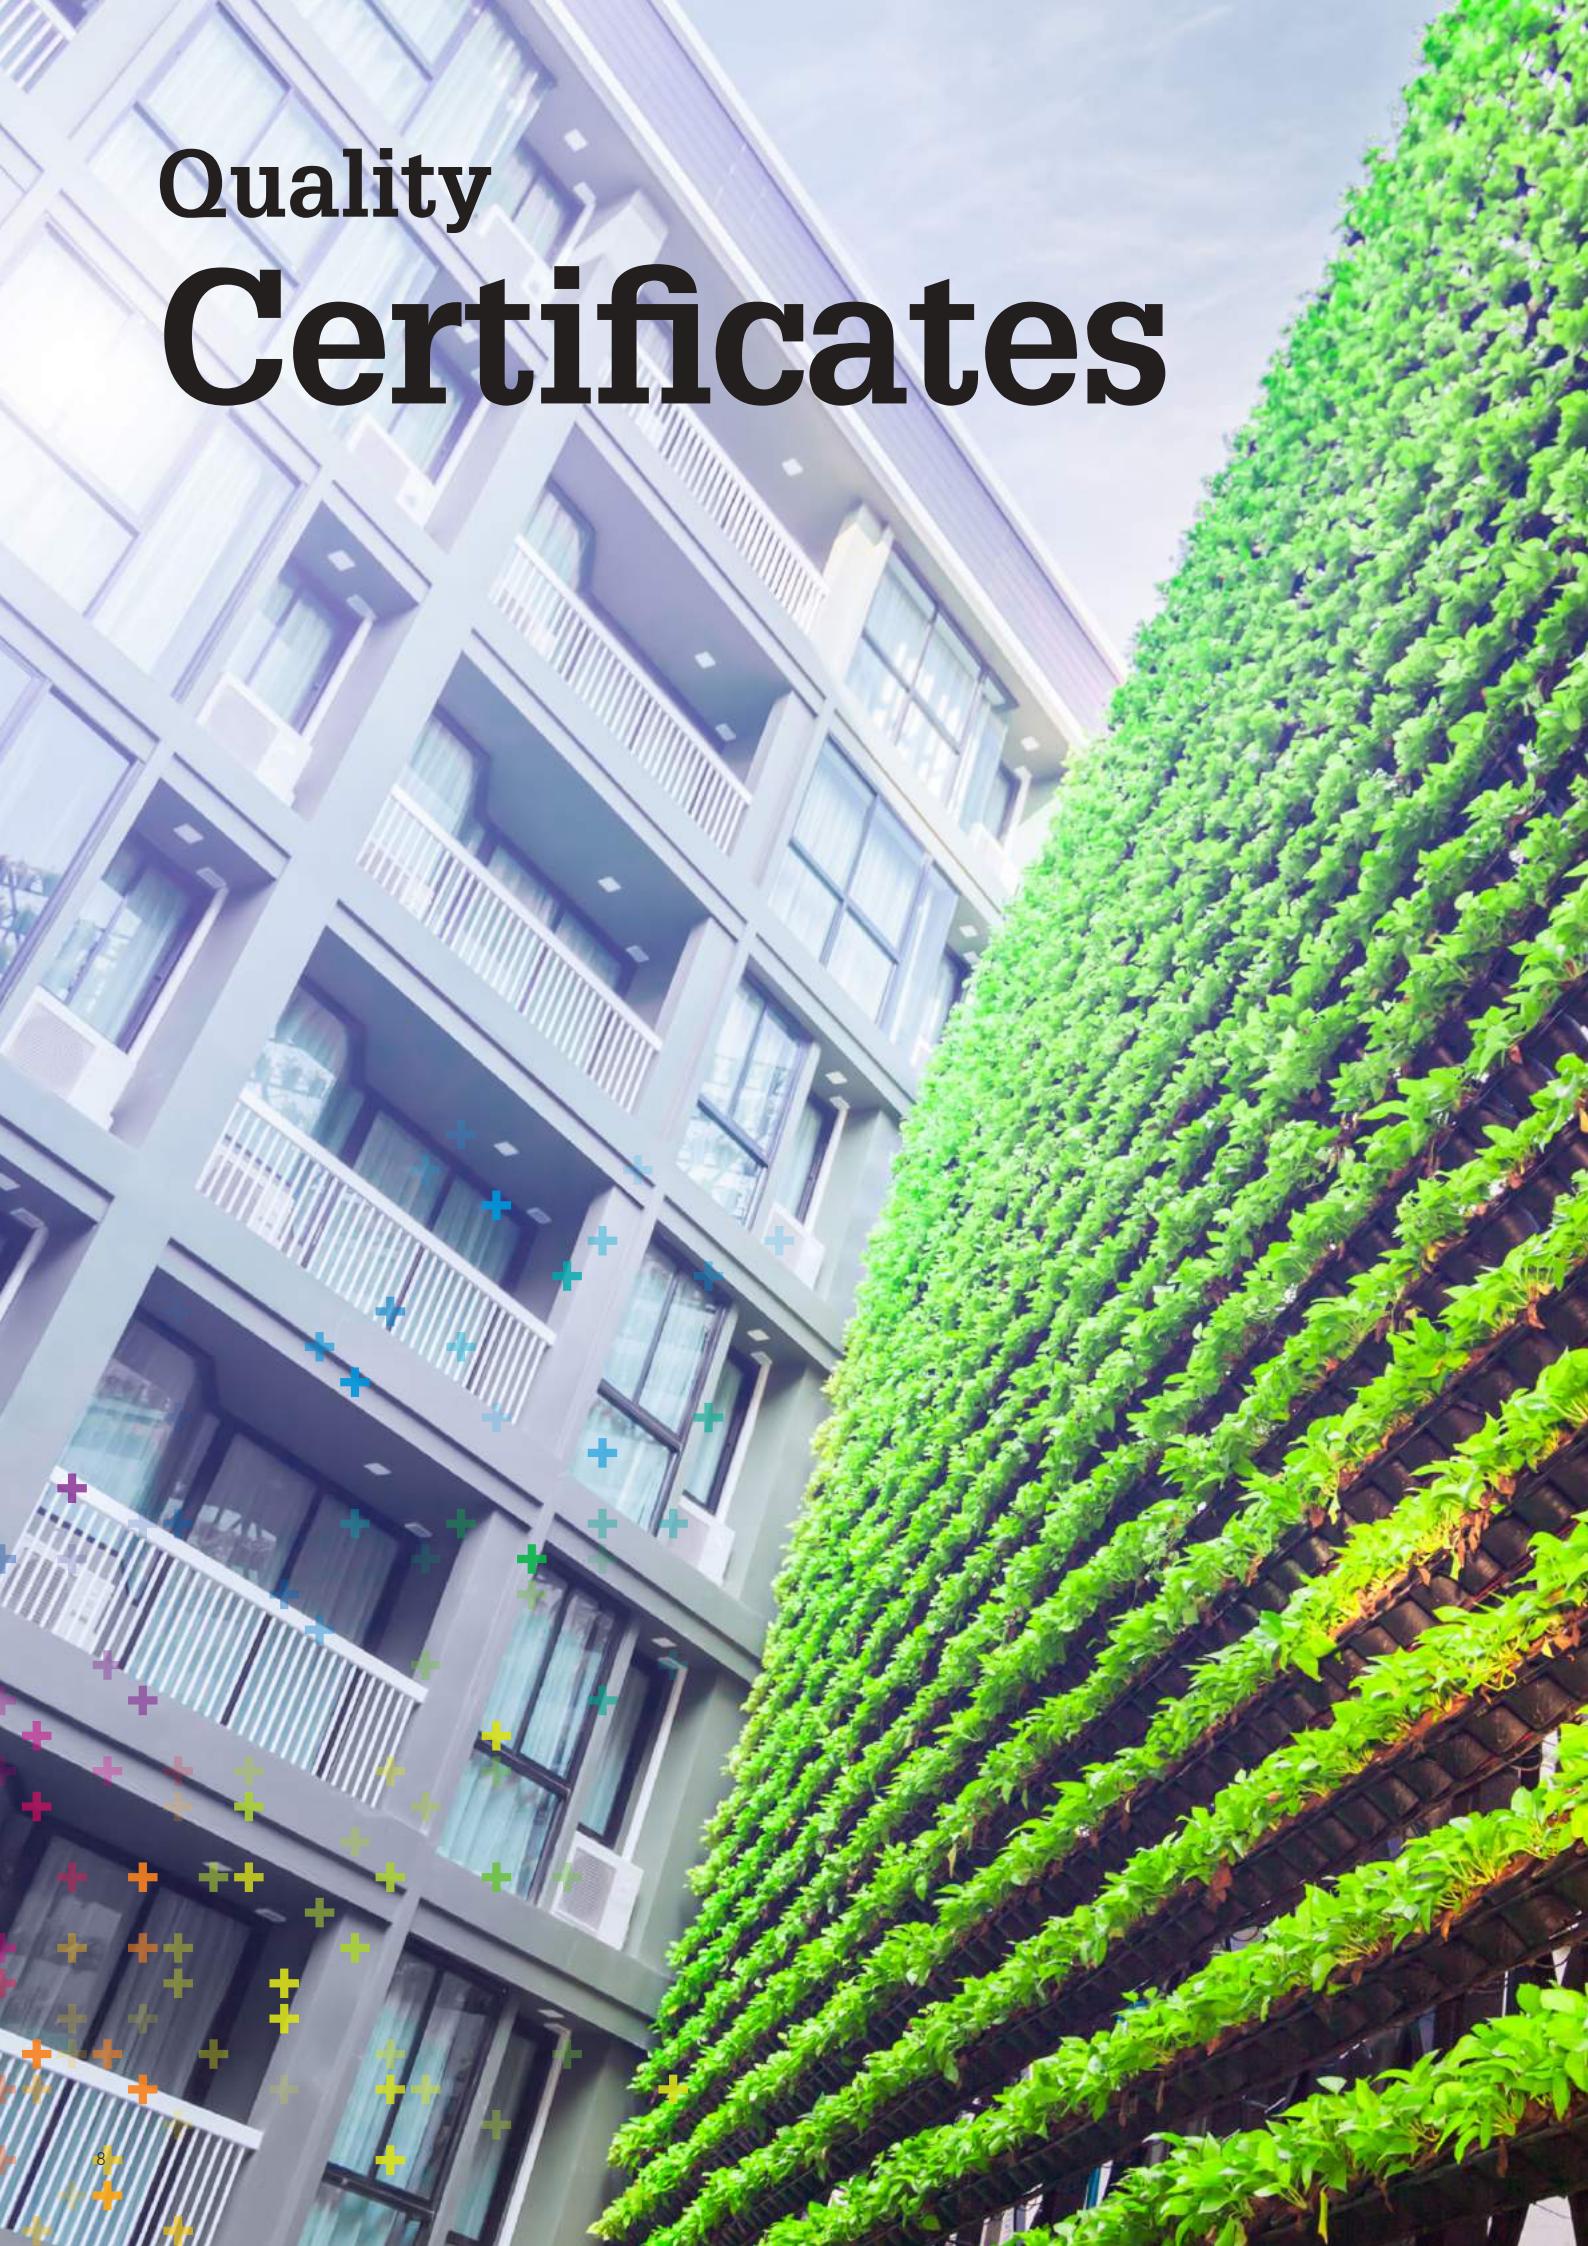

Manufacturing its products in accordance with the European standards and Turkish standards equivalent to the European standards, our Company is a leading and dynamic organization in terms of continuous improvement and customer satisfaction.


Some of the product quality certificates of our Company are as follows:

DVGW(Germany) - SKZ(Germany) - Hygiene Institute(Germany) - Fraunhofer (Germany) - Nordic Polymark (Sweden) - AENOR (Spain) - UkrSepro (Ukraine) - GOST (Russia) - SABS (South Africa) - TSE (Turkey)

Presenting its product standards in a way that offers the quality and continuity required for customers, GF Hakan Plastik exports its products to over 70 countries based on these certificates.

In addition to product quality, the process and system quality of GF Hakan Plastik is certified by BVQI through TS EN ISO 9001:2015 certificate and the company maintains its efforts on certification. Our Company that places top priority on process and system quality also has TS EN ISO 14001:2015 and TS EN ISO 45001:2018 certificates. Our both two production plants in Çerkezköy and Şanlıurfa have TS EN ISO/IEC 17025:2017 laboratory accreditation certificates awarded by TÜRKAK organization.

Certificates

 TURKEY- TSE	 SCANDINAVIAN COUNTRIES SWEDCERT	 TURKEY TÜRKAK	 RUSSIA-BELARUS UKRAINE GOST-r
 SPAIN AFITI LICOF	 GERMANY DIN CERTCO	 SWITZERLAND SGS	 RUSSIA-BELARUS KAZAKHSTAN-KYRGYZSTAN ARMENIA
 UKRAINE UKR - SEPRO	 NETHERLANDS KIWA	 BULGARIA BULGARKONTROLA	 UK WRAS Water Resources Authority Bureau
 UKRAINE HYGIENE	 SCANDINAVIAN COUNTRIES SWEDCERT KIWA	 HUNGARY HUNGARY - EMI	 RUSSIA HYGIENE
 BUREAU VERITAS	 SOUTH AFRICA SABS	 GERMANY- RUSSIA HYGENE INSTITUT	 GERMANY HOCH
 SOUTH AFRICA SANAS	 UK LLOYD'S REGISTER	 TURKEY EUROPAP	 BULGARIA NJN
 TURKEY YILDIZ TECHNICAL UNIVERSITY REPORT	 MALAYSIA IKRAM QA	 GERMANY DVGW	 GERMANY DIBT
 UNITED STATES OF AMERICA NSF	 GERMANY FRAUNHOFER INSTITUTE	 SPAIN AENOR	 STN TC

Silenta Extreme

Fire Resistant and Noise-insulated Halogen Free Piping System

Silenta Extreme, is a new PP-based halogen-free, resistant to fire [B-s1, d0] and noise-insulated [18 dB(A)] soil, waste water and drainage piping system, especially developed and being produced by the highest technology for you to increase your building safety and comfort with its improved features and structure.

Due to its halogen-free feature, it does not emit any poisonous and lethal gases in case of fire.

It is manufactured with the last generation of multilayer polypropylene technology according to the requirements of EN 1451, EN 13501 and DIN EN 14366 standards.

+ Special Differentiating Features

- Halogen-free structure
- Zero toxicity, no emission of poisonous and lethal gases in case of fire
- Fire resistant with B-s1; d0 fire classification
- Soundproof multilayer structure with 18dB(A) noise level at 4 l/s flow rate
- High impact resistance
- Excellent corrosion resistance and long service life
- Superior chemical resistance
- Smooth inner surface, no incrustations
- High temperature resistant up to 97 °C
- UV protected external layer
- 100% recyclable, and environmental-friendly
- Easy installation and application
- Adds value to the property

+ Fields of Application

- All soil and waste water drainage systems inside the buildings
- Office buildings, conference halls etc.
- Schools, libraries, hospitals, hotels, houses
- All underground drainage systems between the building and the main pipeline

- Rainwater systems
- Sustainable / green buildings
- Industrial areas (short and long-term use)


Fire Classification: (acc. to EN 13501-1)

B-s1, d0

- B : Hardly Combustible**
s1 : No Smoke formation
d0 : No Burning Droplets formation



18 dB(A)

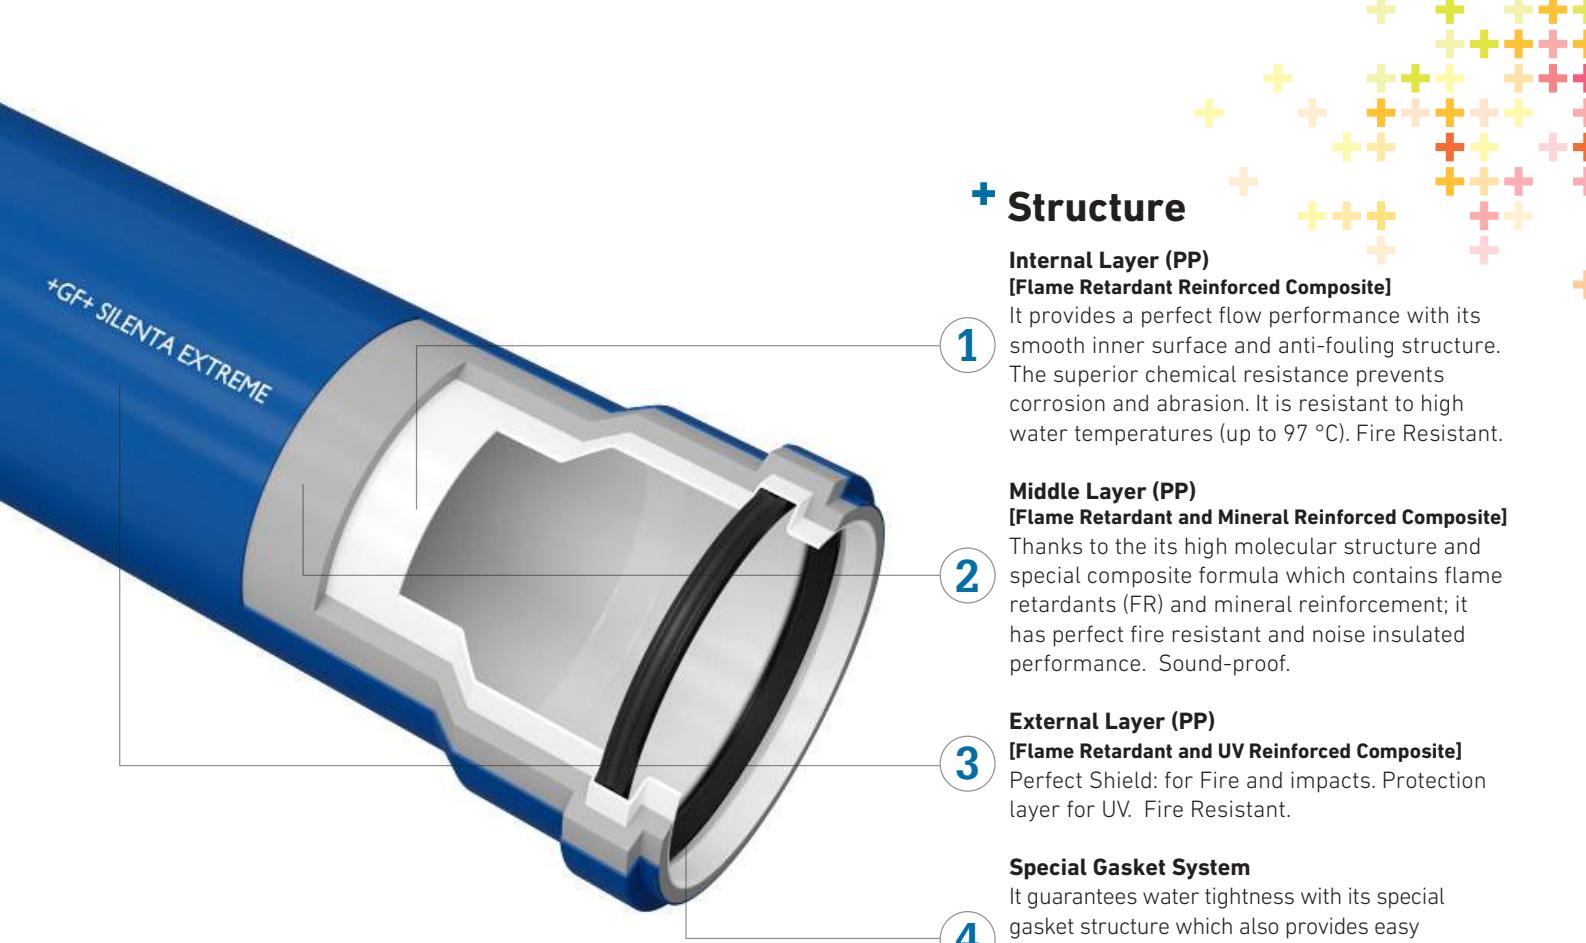

+ Structure

Internal Layer (PP)

[Flame Retardant Reinforced Composite]

It provides a perfect flow performance with its smooth inner surface and anti-fouling structure. The superior chemical resistance prevents corrosion and abrasion. It is resistant to high water temperatures (up to 97 °C). Fire Resistant.

Middle Layer (PP)

[Flame Retardant and Mineral Reinforced Composite]

Thanks to its high molecular structure and special composite formula which contains flame retardants (FR) and mineral reinforcement; it has perfect fire resistant and noise insulated performance. Sound-proof.

External Layer (PP)

[Flame Retardant and UV Reinforced Composite]

Perfect Shield: for Fire and impacts. Protection layer for UV. Fire Resistant.

Special Gasket System

It guarantees water tightness with its special gasket structure which also provides easy assembly. The geometrical features of the gasket groove and structure ensure fast and easy installation.

+ Technical Properties

Pipe Structure	3-Layers, Polypropylene based, halogen free composite structure
Diameters [mm]	d50, d75, d110, d125, d160, d200
Pipe Length [mm]	150, 250, 500, 1000, 2000, 3000
Acoustic Performance	18 dB(A) at 4 l/s flow rate (DIN EN 14366)
Fire Class	B-s1,d0 (EN 13501)
Joining Type/Method	Rubber Gasket and Socket (Push-Fit)
Clamping	With GF Hakan Silent pipe clamps
Color	Dark Blue (RAL 5017)
Installation	With GF Hakan Silent pipe clamps
Thermal Expansion Coefficient	0.06 mm/m°K
Tensile Strength	13 N/mm ²
Chemical Resistance	Resistant to the organic and inorganic acids suitable for pH values between 2-12
Installation Temperature	Minimum: -10 °C Maximum: +97 °C
Operating Temperature	Minimum: -10 °C Maximum: +97 °C
Application Class	B/D (building / drainage)
Ring Stiffness	ISO/DIN 9969, Ring Stiffness is minimum 4,0 kN/m ² in all dimension ranges between d50 and d200 mm
Impact Resistance	Complies with EN 1451
Halogen Acid Gas Formation (During fire or combustion)	0,24 mg/g To be classified as "halogen-free", a product or a substance must consist of less than: <ul style="list-style-type: none">• 900 parts per million (ppm) or 0,9 mg/g of chlorine or,• 900 parts per million (ppm) or 0,9 mg/g of bromine and,• 1500 ppm or 1,5mg/g of total halogens, according to the International Electrochemical Commission (IEC), Restriction Use of Halogen (IEC 61249-2-21) Directive.
Approvals And Certificates	Approvals and Certificates: Afifi-Licof (Spain): Fire Classification Report, Fraunhofer (Germany): Acoustic Performance Report, TSE (Turkey): Halogen free test report

Superior Sound Proof Performance


Fire Resistant and Noise-insulated Halogen Free Piping System guarantees quality, peace of mind and living comfort.

Acoustic performance of Silenta Extreme was accredited by the famous German Fraunhofer Institute, in compliance with DIN 4109 and EN 14366.

Noise measurement tests were carried out at Fraunhofer Physical Constructions Institute in Stuttgart, the most accredited European laboratory on noise studies on buildings. The acoustic performance tests were conducted in compliance with the standard DIN EN 14366.

The emitted noise level at 4l/s flow rate, with special GF Hakan Silent clamps, is only 18 dB(A) according to DIN EN 14366.

SILENTA EXTREME ACOUSTIC PERFORMANCE dB(A)

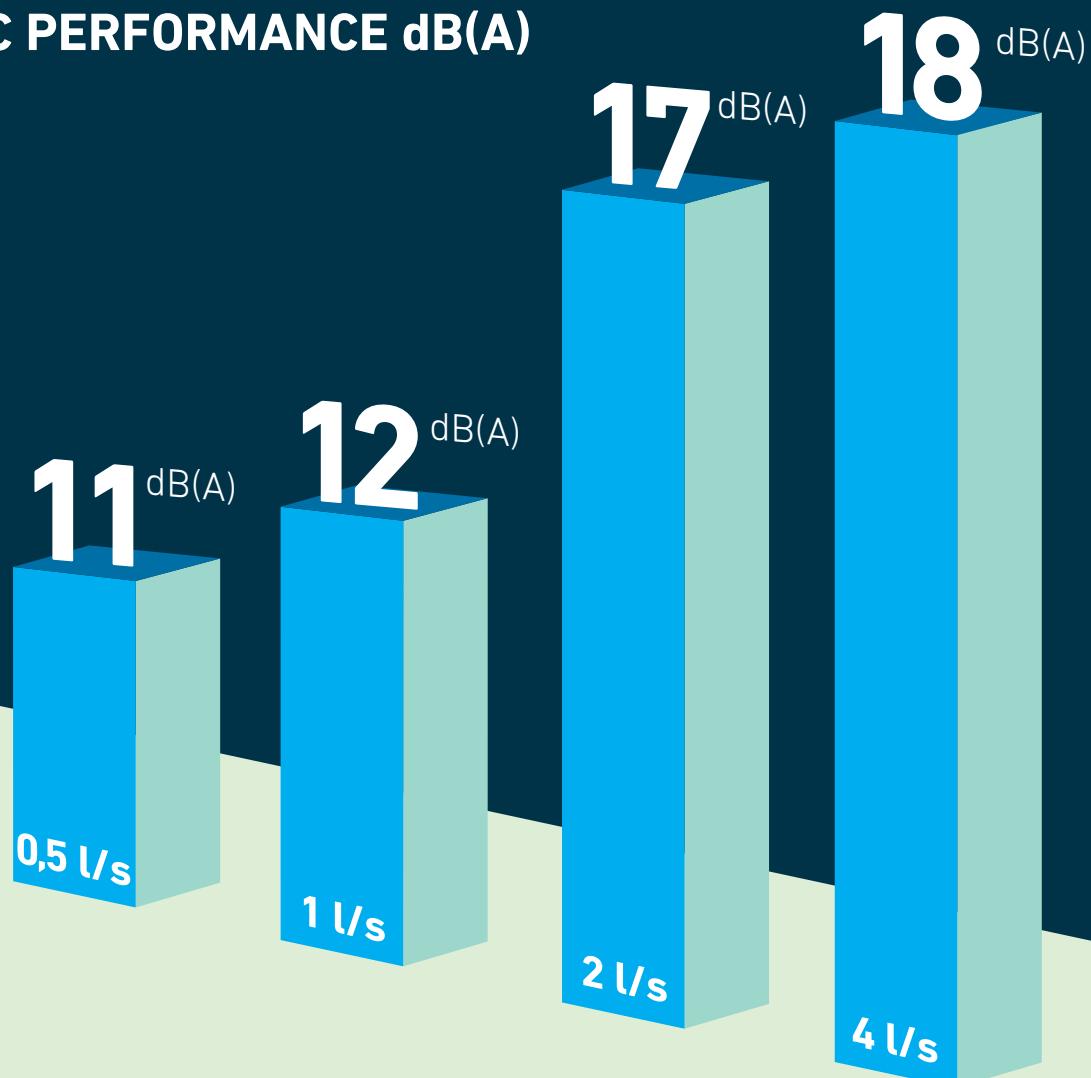

Silenta Extreme



Silenta Extreme Pipe with Socket



Dia [mm]	Leng. [mm]	Thick. [mm]	Code	Packing Type	Pc
50	150	2,0	5504005000121	Cartonbox	200
50	250	2,0	5504005000221	Cartonbox	150
50	500	2,0	5504005000321	Cartonbox	90
50	1000	2,0	5504005000421	Bundle	10
50	2000	2,0	5504005000521	Bundle	10
50	3000	2,0	5504005000621	Bundle	10
75	150	2,6	5504007500121	Cartonbox	100
75	250	2,6	5504007500221	Cartonbox	70
75	500	2,6	5504007500321	Cartonbox	40
75	1000	2,6	5504007500421	Bundle	10
75	2000	2,6	5504007500521	Bundle	10
75	3000	2,6	5504007500621	Bundle	10
110	150	3,4	5504011000121	Cartonbox	45
110	250	3,4	5504011000221	Cartonbox	35
110	500	3,4	5504011000321	Cartonbox	20
110	1000	3,4	5504011000421	Bundle	4
110	2000	3,4	5504011000521	Bundle	4
110	3000	3,4	5504011000621	Bundle	4
125	150	3,4	5504012500121	Cartonbox	40
125	250	3,4	5504012500221	Cartonbox	20
125	500	3,4	5504012500321	Cartonbox	16
125	1000	3,4	5504012500421	Bundle	4
125	2000	3,4	5504012500521	Bundle	4
125	3000	3,4	5504012500621	Bundle	4
160	150	4,0	5504016000121	Cartonbox	24
160	250	4,0	5504016000221	Cartonbox	14
160	500	4,0	5504016000321	Cartonbox	8
160	1000	4,0	5504016000421	Bundle	1
160	2000	4,0	5504016000521	Bundle	1
160	3000	4,0	5504016000621	Bundle	1
200	500	4,5	5504020000321	Bundle	5
200	1000	4,5	5504020000421	Cartonbox	1
200	2000	4,5	5504020000521	Cartonbox	1
200	3000	4,5	5504020000621	Cartonbox	1

Silenta Extreme Elbow 15°



Dia [mm]	Code	Packing Type	Pc
50	5604105000121	Cartonbox	300
75	5604107500121	Cartonbox	150
110	5604111000121	Cartonbox	60
160	5604116000121	Cartonbox	60

Silenta Extreme Elbow 30°



Dia [mm]	Code	Packing Type	Pc
50	5604105000221	Cartonbox	350
75	5604107500221	Cartonbox	150
110	5604111000221	Cartonbox	60
160	5604116000221	Cartonbox	20

Silenta Extreme Elbow 45°



Dia [mm]	Code	Packing Type	Pc
50	5604105000321	Cartonbox	300
75	5604107500321	Cartonbox	150
110	5604111000321	Cartonbox	50
125	5604112500321	Cartonbox	40
160	5604116000321	Cartonbox	20
200	5604120000321	Cartonbox	10

Silenta Extreme Elbow 67,5°



Dia [mm]	Code	Packing Type	Pc
50	5604105000421	Cartonbox	300
75	5604107500421	Cartonbox	150
110	5604111000421	Cartonbox	50

Silenta Extreme Elbow 87,5°



Dia [mm]	Code	Packing Type	Pc
50	5604105000521	Cartonbox	300
75	5604107500521	Cartonbox	100
110	5604111000521	Cartonbox	40
125	5604112500521	Cartonbox	30
160	5604116000521	Cartonbox	15
200	5604120000521	Cartonbox	6

Silenta Extreme Long Elbow 45°



Dia [mm]	Code	Packing Type	Pc
110	5604111004521	Cartonbox	8

Silenta Extreme Long Socket



Dia [mm]	Code	Packing Type	Pc
110	5604911002221	Cartonbox	15



Silenta Extreme Pipe without Socket



Dia [mm]	Leng. [mm]	Thick. [mm]	Code	Packing Type	Pc
200	500	4,5	5504020000521	Cartonbox	8
200	1000	4,5	55040200005321	Length	1
200	2000	4,5	55040200005421	Length	1
200	3000	4,5	55040200005521	Length	1

Silenta Extreme Clamp



Dia [mm]	Code	Packing Type	Pc
50	5601905001022	Cartonbox	100
75	5601907501122	Cartonbox	200
110	5601911001222	Cartonbox	100
125	5601912501322	Cartonbox	100
160	5601916001422	Cartonbox	50



Silenta Extreme Branch 45°

Dia [mm]	Code	Packing Type	Pc
50-50	5604205000121	Cartonbox	150
75-50	5604207500121	Cartonbox	75
75-75	5604207500221	Cartonbox	60
110-50	5604211000121	Cartonbox	40
110-75	5604211000221	Cartonbox	30
110-110	5604211000321	Cartonbox	20
125-50	5604212500121	Cartonbox	30
125-75	5604212500221	Cartonbox	25
125-110	5604212500321	Cartonbox	20
125-125	5604212500421	Cartonbox	16
160-110	5604216000121	Cartonbox	10
160-125	5604216000221	Cartonbox	10
160-160	5604216000321	Cartonbox	8
200-110	5604220000121	Cartonbox	4
200-125	5604220000221	Cartonbox	4
200-160	5604220000321	Cartonbox	4
200-200	5604220000421	Cartonbox	4



Silenta Extreme Corner Double Branch 87,5°

Dia [mm]	Code	Packing Type	Pc
110-110	5604211000821	Cartonbox	20



Silenta Extreme Reducer

Dia [mm]	Code	Packing Type	Pc
75-50	5604407500121	Cartonbox	200
110-50	5604411000121	Cartonbox	100
110-75	5604411000221	Cartonbox	100
125-110	5604412500121	Cartonbox	50
160-110	5604416000121	Cartonbox	40
160-125	5604416000221	Cartonbox	50
200-160	5604420000121	Cartonbox	20



Silenta Extreme Branch 67,5°

Dia [mm]	Code	Packing Type	Pc
110-110	5604211001121	Cartonbox	25



Silenta Extreme Branch 87,5°

Dia [mm]	Code	Packing Type	Pc
50-50	5604205000221	Cartonbox	150
75-50	5604207500321	Cartonbox	100
75-75	5604207500421	Cartonbox	80
110-50	5604211000421	Cartonbox	50
110-75	5604211000521	Cartonbox	30
110-110	5604211000621	Cartonbox	30
125-110	5604212503822	Cartonbox	20
125-125	5604212500521	Cartonbox	20
160-110	5604216000521	Cartonbox	20
160-125	5604216004022	Cartonbox	20
160-160	5604216000421	Cartonbox	10



Silenta Extreme Socket with Central Register

Dia [mm]	Code	Packing Type	Pc
50	5604505000121	Cartonbox	400
75	5604507500121	Cartonbox	200
110	5604511000121	Cartonbox	80
160	5604516000121	Cartonbox	30
200	5604520000121	Cartonbox	12



Silenta Extreme Sliding Socket

Dia [mm]	Code	Packing Type	Pc
50	5604505000221	Cartonbox	400
75	5604507500221	Cartonbox	200
110	5604511000221	Cartonbox	80
160	5604516000221	Cartonbox	30
200	5604520000221	Cartonbox	12



Silenta Extreme Double Branch 45°

Dia [mm]	Code	Packing Type	Pc
50-50	5604205000321	Cartonbox	100
75-50	5604207500521	Cartonbox	80
110-50	5604211000921	Cartonbox	35
110-110	5604211001021	Cartonbox	40
160-110	5604216000621	Cartonbox	8



Silenta Extreme Double Branch 87,5°

Dia [mm]	Code	Packing Type	Pc
110-110	5604211000721	Cartonbox	20



Silenta Extreme Pipe Socket Plug

Dia [mm]	Code	Packing Type	Pc
50	5604905000121	Cartonbox	1000
75	5604907500121	Cartonbox	500
110	5604911000121	Cartonbox	200
160	5604916000121	Cartonbox	60

Silenta Extreme



* Silenta Extreme S Siphon 45°



Dia [mm]	Code	Packing Type	Pc
75	5604607500121	Cartonbox	50
110	5604611000121	Cartonbox	20

Silenta Extreme P-Trap



Dia [mm]	Code	Packing Type	Pc
110	5604611000521	Cartonbox	25

* Silenta Extreme S Siphon 87,5°



Dia [mm]	Code	Packing Type	Pc
75	5604607500221	Cartonbox	50
110	5604611000221	Cartonbox	15

Silenta Extreme Floor Trap



Dia [mm]	Code	Packing Type	Pc
110-75-50-50	5604911002022	Cartonbox	12

Silenta Extreme Floor Trap - Long



Dia [mm]	Code	Packing Type	Pc
110-75-50-50	5604911002122	Cartonbox	12

Silenta Extreme Clean Out (Round Cover)



Dia [mm]	Code	Packing Type	Pc
75	5604307500121	Cartonbox	80

Silence Clamp Metal - Vertical Set



Dia [mm]	Code	Packing Type	Pc
50	1300905030412	Cartonbox	20
75	1300907530412	Cartonbox	15
110	1300911030412	Cartonbox	10
125	1300912530412	Cartonbox	10
160	1300916030412	Cartonbox	7
200	1300920030412	Cartonbox	5

Silenta Extreme Clean Out (Rectangle Cover)



Dia [mm]	Code	Packing Type	Pc
110	5604311000121	Cartonbox	30
160	5604316000121	Cartonbox	8

Silence Clamp Metal - Horizontal



Dia [mm]	Code	Packing Type	Pc
50	1300905030612	Cartonbox	50
75	1300907530612	Cartonbox	30
110	1300911030612	Cartonbox	25
125	1300912530612	Cartonbox	25
160	1300916030612	Cartonbox	25
200	1300920030612	Cartonbox	20

Silenta Premium Sound-Insulated Piping Systems

Silenta Premium is a sound-insulating 3-layered sewer pipe system made of PP material which is specially formulated and reinforced for non-pressurized domestic drainage in accordance with System Standards of EN 1451, DIN 4109 and DIN 4102.

- Silenta Premium Sound-Insulated Pipe Systems providing a complete solution with advanced level durability, impact resistance, low sound level and easy installation features have considerably wide product range
- It reached 13 dB(A) sound intensity level at the flow rate of 4 l/s in the tests conducted by the German Fraunhofer Institute according to EN 14366
- It can be used in the underground and aboveground drainage systems even in the areas having high traffic load
- Provides excellent sound insulation, creates ideal conditions for buildings and contributes to an increase in the property value along with the quality of life. Reduces the vibrations and unfamiliar sounds coming from the plumbing system
- It is suitable for hot/cold water and acidic liquid transfers.
- No corrosion, durable
- Alternative to cast iron pipes
- Does not contain halogen and emit lethal and poisonous gases
- 100% recyclable and environmentally friendly

+ Fields of Application

- Office buildings, conference halls etc
- Schools, libraries, hospitals, hotels, houses
- All underground drainage systems between the building and the main pipeline
- Sustainable / green buildings
- Industrial areas (short and long-term use)



13 dB(A)



STRUCTURE

Inner Layer

It provides a perfect flow performance with its structure. The superior chemical resistance prevents corrosion and abrasion. It is resistant to high water temperatures.

Middle Layer

With its high molecular structure and special composite formula, the sound waves are absorbed and prevented.

Outer Layer

It is resistant to high temperatures and impacts.

Special Gasket System

It guarantees water tightness with its special gasket structure providing ease of montage. The geometrical properties of the gasket groove ensure fast and easy installation.

Technical Properties

Pipe Structure	3-Layered (Special PP-Mineral reinforced composite)
Diameters [mm]	d58, d78, d90, d110, d135, d160, d200
Pipe length [mm]	150, 250, 500, 1000, 2000, 3000
Sound transmission	13 dB(A) at 4 l/s (EN 14366)
Fire class	B2 (DIN 4102)
Jointing method	Jointing with Rubber Gasket and Socket (Push-Fit)
Clamping	With GF Hakan Silent pipe clamps
Color	Light Grey (Halogen-free and Cadmium-free)
Installation	Very easy to install thanks to its weight lower than cast-iron pipes
Thermal expansion coefficient	0.04 mm/m°K
Tensile strength	13 N/mm ²
Chemical resistance	Resistant to organic and inorganic chemical environments for pH values between 2 and 12
Installation temperature	Minimum: -10°C Maximum: 60°C
Operating temperature	Minimum: -10°C Maximum: 97°C
Application class	B/D (building / drainage)
Ring Stiffness	ISO/DIN 9969, The ring stiffness is at least 4.0 kN / m ² over the entire range of – dimensions: 58 mm – 200 mm
Impact strength	Complies with EN 1451
Approvals and Certificates	Germany: DIBt, Fraunhofer, Hoch, Ukraine: Sepro, Russia: Gost, Malaysia: Ikram, Turkey: TSE

Superior Sound-Proof Performance


Sound-insulated soil and waste water pipe system **Silenta Premium** guarantees quality, peace of mind and living comfort.

Acoustic performance of Silenta Premium was accredited by the famous German Fraunhofer Institute, in compliance with DIN 4109 and EN 14366.

Noise measurement tests were carried out at Fraunhofer Physical Constructions Institute in Stuttgart, the most accredited European laboratory on noise studies on buildings. The acoustic performance tests were conducted in compliance with the standard DIN EN 14366.

The emitted noise level at **4 l/s** flow rate, with special GF Hakan Silent clamps, is only **13 dB(A)** according to **DIN EN 14366**.

SILENTA PREMIUM ACOUSTIC PERFORMANCE dB(A)

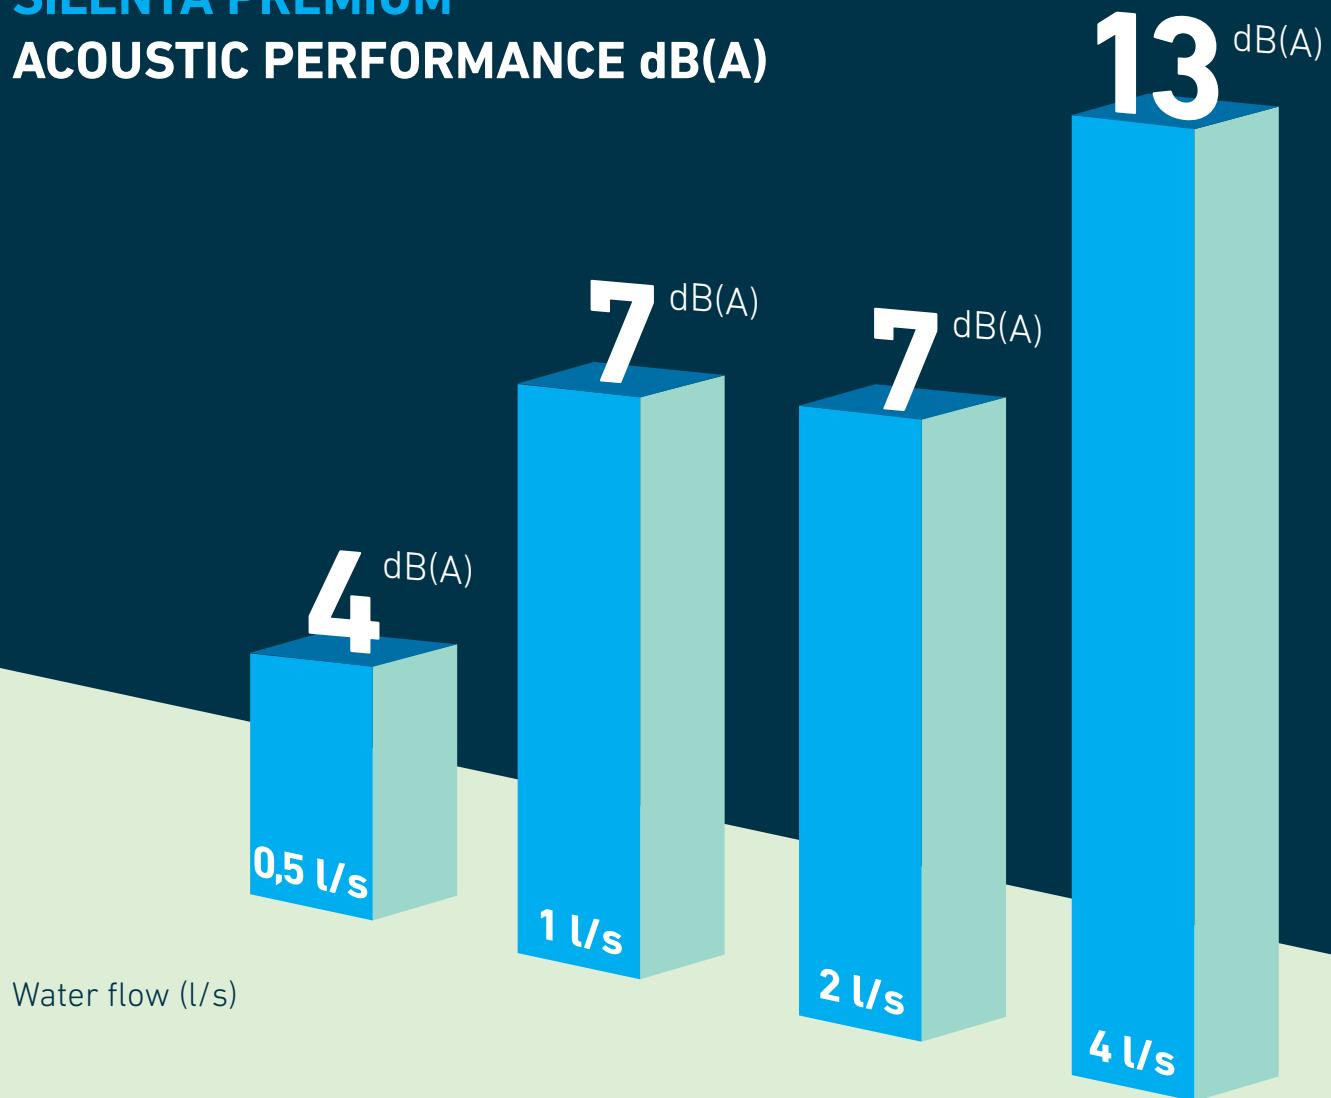

Silenta Premium



Silenta Premium Pipe with Socket

Dia. [mm]	Leng. [mm]	Thick. [mm]	Code	Packing Type	Pc
58	150	4,0	4401005800121	Cartonbox	30
58	250	4,0	4401005800221	Cartonbox	25
58	500	4,0	4401005800321	Cartonbox	30
58	1000	4,0	4401005800421	Bundle	8
58	2000	4,0	4401005800521	Bundle	8
58	3000	4,0	4401005800621	Bundle	8
78	150	4,5	4401007801021	Cartonbox	40
78	250	4,5	4401007801121	Cartonbox	12
78	500	4,5	4401007801221	Cartonbox	16
78	1000	4,5	4401007801321	Bundle	6
78	2000	4,5	4401007801421	Bundle	6
78	3000	4,5	4401007801521	Bundle	6
90	150	4,5	44010090002021	Cartonbox	36
90	250	4,5	44010090002121	Cartonbox	24
90	500	4,5	44010090002221	Cartonbox	12
90	1000	4,5	44010090002321	Bundle	6
90	2000	4,5	44010090002421	Bundle	6
90	3000	4,5	44010090003321	Bundle	6
110	150	5,3	4401011003021	Cartonbox	9
110	250	5,3	4401011003121	Cartonbox	12
110	500	5,3	4401011003221	Cartonbox	8
110	1000	5,3	4401011003321	Bundle	4
110	2000	5,3	4401011003421	Bundle	4
110	3000	5,3	4401011003521	Bundle	4
135	150	5,3	4401013504021	Cartonbox	12
135	250	5,3	4401013504121	Cartonbox	8
135	500	5,3	4401013504221	Cartonbox	5
135	1000	5,3	4401013504321	Bundle	4
135	2000	5,3	4401013504421	Bundle	4
135	3000	5,3	4401013504521	Bundle	4
160	150	5,3	4401016005021	Cartonbox	10
160	250	5,3	4401016005121	Cartonbox	6
160	500	5,3	4401016005221	Cartonbox	4
160	1000	5,3	4401016005321	Length	1
160	2000	5,3	4401016005421	Length	1
160	3000	5,3	4401016005521	Length	1
200	500	6,2	4401020006021	Cartonbox	5
200	1000	6,2	4401020006121	Length	1
200	2000	6,2	4401020006221	Length	1
200	3000	6,2	4401020006321	Length	1



Silenta Premium Elbow 15°

Dia. [mm]	Code	Packing Type	Pc
58	4501105800321	Cartonbox	120
78	4501107800121	Cartonbox	70
90	4501109000121	Cartonbox	39
110	4501111000521	Cartonbox	20
135	4501113500821	Cartonbox	12
160	4501116001021	Cartonbox	8



Silenta Premium Elbow 30°

Dia. [mm]	Code	Packing Type	Pc
58	4501105800421	Cartonbox	120
78	4501107800221	Cartonbox	70
90	4501109000221	Cartonbox	39
110	4501111000621	Cartonbox	20
135	4501113500921	Cartonbox	12
160	4501116001121	Cartonbox	8



Silenta Premium Elbow 45°

Dia. [mm]	Code	Packing Type	Pc
58	4501105800121	Cartonbox	50
78	4501107800321	Cartonbox	60
90	4501109000321	Cartonbox	32
110	4501111000721	Cartonbox	20
135	4501113501021	Cartonbox	5
160	4501116001221	Cartonbox	8
200	4501120001421	Cartonbox	4



Silenta Premium Elbow 67,5°

Dia. [mm]	Code	Packing Type	Pc
58	4501105800521	Cartonbox	100
78	4501107800521	Cartonbox	50
90	4501109000521	Cartonbox	32
110	4501111000821	Cartonbox	16



Silenta Premium Elbow 87,5°

Dia. [mm]	Code	Packing Type	Pc
58	4501105800221	Cartonbox	40
78	4501107800421	Cartonbox	20
90	4501109000421	Cartonbox	32
110	4501111000921	Cartonbox	16
135	4501113501121	Cartonbox	12
160	4501116001321	Cartonbox	8
200	4501120001521	Cartonbox	3



Silenta Premium Pipe without Socket

Dia. [mm]	Leng. [mm]	Thick. [mm]	Code	Packing Type	Pc
58	3000	4,0	4401005810621	Bundle	8
58	5000	4,0	4401005810821	Bundle	8
78	3000	4,5	4401007811521	Bundle	6
78	5000	4,5	4401007811721	Bundle	6
90	1000	4,5	44010090003621	Bundle	10
90	3000	4,5	44010090002521	Bundle	6
110	3000	5,3	4401011013521	Bundle	4
110	5000	5,3	4401011013721	Bundle	4
135	3000	5,3	4401013514521	Bundle	4
135	5000	5,3	4401013514721	Bundle	4
160	3000	5,3	4401016015521	Length	1
160	5000	5,3	4401016015721	Length	1
200	500	6,2	4401020016021	Cartonbox	4
200	1000	6,2	4401020016121	Length	1
200	2000	6,2	4401020016221	Length	1
200	3000	6,2	4401020016321	Length	1

Silenta Premium



Silenta Premium Long Elbow 45°

Dia. (mm)	Code	Packing Type	Pc
110	4501111001321	Cartonbox	8



Silenta Premium Siphon Elbow 87,5°

Dia. (mm)	Code	Packing Type	Pc
58-40	4501105830621	Cartonbox	140



Silenta Premium Clean Out Elbow 87,5°

Dia. (mm)	Code	Packing Type	Pc
110	4501311001121	Cartonbox	15



Silenta Premium Branch 45°

Dia. (mm)	Code	Packing Type	Pc
58-58	4501205800121	Cartonbox	20
78-58	4501207800221	Cartonbox	30
78-78	4501207800321	Cartonbox	20
90-58	4501209000121	Cartonbox	8
90-90	4501209000321	Cartonbox	14
110-58	4501211000421	Cartonbox	18
110-78	4501211000521	Cartonbox	14
110-110	4501211000621	Cartonbox	10
135-78	4501213500721	Cartonbox	10
135-110	4501213500821	Cartonbox	6
135-135	4501213500921	Cartonbox	5
160-110	4501216001021	Cartonbox	5
160-135	4501216001121	Cartonbox	4
160-160	4501216001221	Cartonbox	3
200-110	4501220001421	Cartonbox	2
200-135	4501220001521	Cartonbox	2
200-160	4501220001621	Cartonbox	1
200-200	4501220001721	Cartonbox	3



Silenta Premium Branch 67,5°

Dia. (mm)	Code	Packing Type	Pc
58-58	4501207805021	Cartonbox	18
78-58	4501207805021	Cartonbox	30
78-78	4501207805521	Cartonbox	20
110-58	4501211001021	Cartonbox	18
110-78	4501211001121	Cartonbox	14
110-110	4501211000721	Cartonbox	12

Silenta Premium

Silenta Premium Branch 87,5°



Dia. (mm)	Code	Packing Type	Pc
58-58	4501205806021	Cartonbox	15
78-58	4501207806121	Cartonbox	8
78-78	4501207806221	Cartonbox	7
90-58	4501209006121	Cartonbox	18
90-78	4501209006221	Cartonbox	15
90-90	4501209006321	Cartonbox	12
110-58	4501211006321	Cartonbox	18
110-78	4501211006421	Cartonbox	15
110-90	4501211006621	Cartonbox	15
110-110	4501211006521	Cartonbox	12
135-110	4501213506621	Cartonbox	8
135-135	4501213506721	Cartonbox	6
160-110	4501216006621	Cartonbox	5
160-160	4501216006921	Cartonbox	4

Silenta Premium Clean Out Tee



Dia. (mm)	Code	Packing Type	Pc
110-110	4501311002121	Cartonbox	10
160-78	4501316001321	Cartonbox	5
160-110	4501316002321	Cartonbox	5

Silenta Premium Corner Double Branch 87,5°



Dia. (mm)	Code	Packing Type	Pc
110-110	4501211007121	Cartonbox	10

Silenta Premium Radius Branch 87,5° (Swept)



Dia. (mm)	Code	Packing Type	Pc
90-90	4501209030621	Cartonbox	16
110-90	4501211031321	Cartonbox	8
110-110	4501211031221	Cartonbox	8

Silenta Premium Corner Radius Double Branch 87,5° (Swept)



Dia. (mm)	Code	Packing Type	Pc
90-90	4501209030721	Cartonbox	12

Silenta Premium Double Branch 45°



Dia. (mm)	Code	Packing Type	Pc
110-110	4501211004121	Cartonbox	8
135-110	4501213504221	Cartonbox	4
160-110	4501216004321	Cartonbox	3

Silenta Premium Socket Plug



Dia. (mm)	Code	Packing Type	Pc
58	4501905800121	Cartonbox	25
78	4501907800221	Cartonbox	50
90	4501909000321	Cartonbox	50
110	4501911000321	Cartonbox	20
135	4501913500421	Cartonbox	40
160	4501916000521	Cartonbox	12

Silenta Premium Double Branch 87,5°



Dia. (mm)	Code	Packing Type	Pc
90-90	4501209007021	Cartonbox	8
110-110	4501211007021	Cartonbox	10

Silenta Premium



Silenta Premium Reducer

Dia. (mm)	Code	Packing Type	Pc
58-40	4501405800221	Cartonbox	175
58-50	4501405800121	Cartonbox	60
78-50	4501407802421	Cartonbox	50
78-58	4501407800221	Cartonbox	40
78-75	4501407800321	Cartonbox	25
90-58	4501409000121	Cartonbox	80
90-78	4501409000221	Cartonbox	32
110-58	4501411000421	Cartonbox	25
110-78	4501411000521	Cartonbox	50
110-90	4501411000621	Cartonbox	40
135-110	4501413500621	Cartonbox	10
160-110	4501416000821	Cartonbox	20
160-135	4501416000921	Cartonbox	12
200-160	4501420001121	Cartonbox	10



Silenta Premium Adaptor

Dia. (mm)	Code	Packing Type	Pc
58-50	4501905801021	Cartonbox	150
78-75	4501907801021	Cartonbox	75
135-125	4501913501021	Cartonbox	22



Silenta Premium Repair Pipe (Long Socket)

Dia. (mm)	Code	Packing Type	Pc
110	4501911001221	Cartonbox	15



Silenta Premium Socket with Central Register

Dia. (mm)	Code	Packing Type	Pc
58	4501505803021	Cartonbox	25
78	4501507803121	Cartonbox	15
90	4501509003121	Cartonbox	45
110	4501511003221	Cartonbox	36
135	4501513503321	Cartonbox	20
160	4501516003421	Cartonbox	6
200	4501520003521	Cartonbox	4



Silenta Premium Clean Out (Circular)

Dia. (mm)	Code	Packing Type	Pc
58	4501305800421	Cartonbox	50
78	4501307800521	Cartonbox	28
90	4501309000121	Cartonbox	12



Silenta Premium Sliding Socket

Dia. (mm)	Code	Packing Type	Pc
58	4501505804021	Cartonbox	12
78	4501507804121	Cartonbox	16
110	4501511004221	Cartonbox	15
135	4501513504521	Cartonbox	10
160	4501516004321	Cartonbox	6
200	4501520004421	Cartonbox	4



Silenta Premium Clean Out (Rectangular)

Dia. (mm)	Code	Packing Type	Pc
110	4501311000121	Cartonbox	10
135	4501313500221	Cartonbox	6
160	4501316000321	Cartonbox	2

Silenta Premium

* Silenta Premium S Siphon 45°



Dia. (mm)	Code	Packing Type	Pc
110	4501611000121	Cartonbox	8

Silenta Premium Collector 4xd58 Out



Dia. (mm)	Code	Packing Type	Pc
110	4501911031021	Cartonbox	12

* Silenta Premium S Siphon 87,5°



Dia. (mm)	Code	Packing Type	Pc
110	450161100221	Cartonbox	7



Silenta Premium Double Branch 87°
(4x58 mm Outlet)

Dia. (mm)	Code	Packing Type	Pc
110	4501211014121	Cartonbox	2



Silenta Premium Double Branch 87,5°
(5x58 mm Outlet)

Dia. (mm)	Code	Packing Type	Pc
110	4501211013121	Cartonbox	2

Silenta Premium Floor Trap



Dia. (mm)	Code	Packing Type	Pc
110-78-58-58	4501911030322	Cartonbox	12

Silence Clamp Metal - Vertical Set



Dia (mm)	Code	Packing Type	Pc
50	1300905030412	Cartonbox	20
58	1300905830412	Cartonbox	20
75-78	1300907530412	Cartonbox	15
110	1300911030412	Cartonbox	10
135	1300913530412	Cartonbox	10
160	1300916030412	Cartonbox	7
200	1300920030412	Cartonbox	5

Silenta Premium Floor Trap - Long



Dia. (mm)	Code	Packing Type	Pc
110-78-58-58	4501911030622	Cartonbox	12

Silence Clamp Metal - Horizontal



Dia. (mm)	Code	Packing Type	Pc
50	1300905030612	Cartonbox	50
58	1300905830612	Cartonbox	30
75-78	1300907530612	Cartonbox	30
110	1300911030612	Cartonbox	25
135	1300913530612	Cartonbox	25
160	1300916030612	Cartonbox	25
200	1300920030612	Cartonbox	20

Silenta Premium P - Trap



Dia. (mm)	Code	Packing Type	Pc
110	4501611000521	Cartonbox	15



Silenta Premium Aerator

Dia. (mm)	Code	Packing Type	Pc
110-110-78	4501911000121	Cartonbox	2

Silenta 3A

Sound-Insulated Piping Systems

Silenta 3A is a sound-insulating 3-layered soil and waste water pipe system made of PP material which is specially formulated and reinforced for non-pressurized domestic drainage in accordance with System Standards of DIN EN 1451, DIN 4109 and DIN 4102. Silenta 3A has high performance in all places that require impact, durability and sound protection.


- Silenta 3A Sound-Insulated Piping System reached 16 dB(A) sound intensity level at the flow rate of 4 l/s in the tests conducted by the German Fraunhofer Institute according to EN 14366
- Suitable for hot/cold water and acidic liquid transfers
- It can be used in the underground and aboveground drainage systems even in the areas having high traffic load. It has high impact resistance
- Alternative to cast iron
- No corrosion, durability
- It has a wide product range
- Does not contain halogen and emit lethal and poisonous gases in case of fire
- 100% recyclable and environmentally friendly

+ Fields of Application

- Office buildings, conference halls etc
- Schools, libraries, hospitals, hotels, houses
- All underground drainage systems between the building and the main pipeline
- Sustainable / green buildings
- Industrial areas (short and long-term use)



16 dB(A)

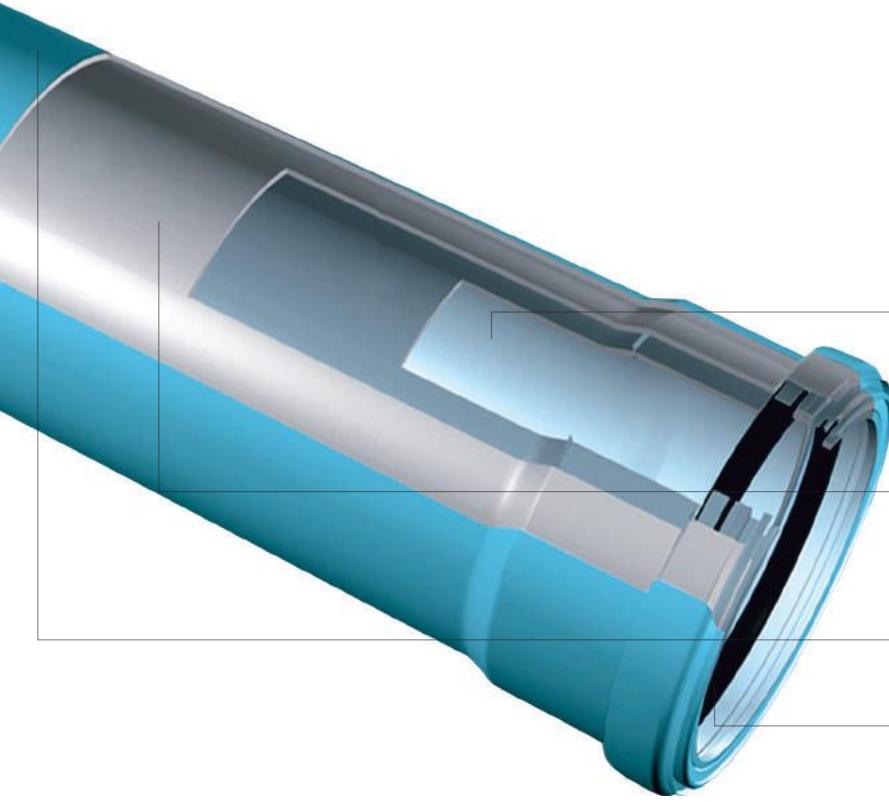

+ Structure

1

Inner Layer

It provides a perfect flow performance with its structure. The superior chemical resistance prevents corrosion and abrasion. It is resistant to high water temperatures.

2

Middle Layer

With its high molecular structure and special composite formula, the sound waves are absorbed and prevented.

3

Outer Layer

It is resistant to high temperatures and impacts.

4

Special Gasket System

It guarantees water tightness with its special gasket structure providing ease of montage. The geometrical properties of the gasket groove ensure fast and easy installation.

+ Technical Properties

Pipe Structure	3-Layered (Special PP-Mineral reinforced composite)
Diameters [mm]	d40, d50, d75, d110, d125, d160, d200
Pipe length [mm]	150, 250, 500, 1000, 2000, 3000
Sound transmission	16 dB(A) at 4 l/s (TS EN 14366)
Fire class	B2 (DIN 4102)
Jointing method	Jointing with Rubber Gasket and Socket (Push-Fit)
Clamping	With GF Hakan Plastic silent pipe clamps
Color	Light Blue (Halogen-free and Cadmium-free)
Installation	Very easy to install thanks to its weight lower than cast-iron pipes
Thermal expansion coefficient	0.06 mm/m°K
Tensile strength	13 N/mm ²
Chemical resistance	Resistant to organic and inorganic chemical environments for pH values between 2 and 12
Installation temperature	Minimum: -10°C Maximum: 60°C
Operating temperature	Minimum: -10°C Maximum: 97°C
Application class	B/D (building / drainage)
Ring Stiffness	ISO/DIN 9969, The ring stiffness is at least 4.0 kN / m ² over the entire range of – dimensions: 40 mm – 200 mm
Impact strength	Complies with EN 1451
Approvals and Certificates	Germany: Fraunhofer, Hoch, Spain: AENOR, Sweden: Kiwa/SwedCert, Ukraine: Sepro, Russia: Gost, UK: LR Lloyd Register, Malaysia: Ikram, Turkey: TSE

Superior Sound Proof Performance


Sound-insulated soil and waste piping system Silenta 3A guarantees quality, peace of mind and living comfort.

Acoustic performance of Silenta 3A was accredited by the famous German Fraunhofer Institute, in compliance with DIN 4109 and EN 14366.

Noise measurement tests were carried out at Fraunhofer Physical Constructions Institute in Stuttgart, the most accredited European laboratory on noise studies on buildings. The acoustic performance tests were conducted in compliance with the standard DIN EN 14366.

The emitted noise level at **4 l/s** flow rate is only **16 dB(A)** according to **DIN EN 14366**.

SILENTA 3A ACOUSTIC PERFORMANCE dB(A)

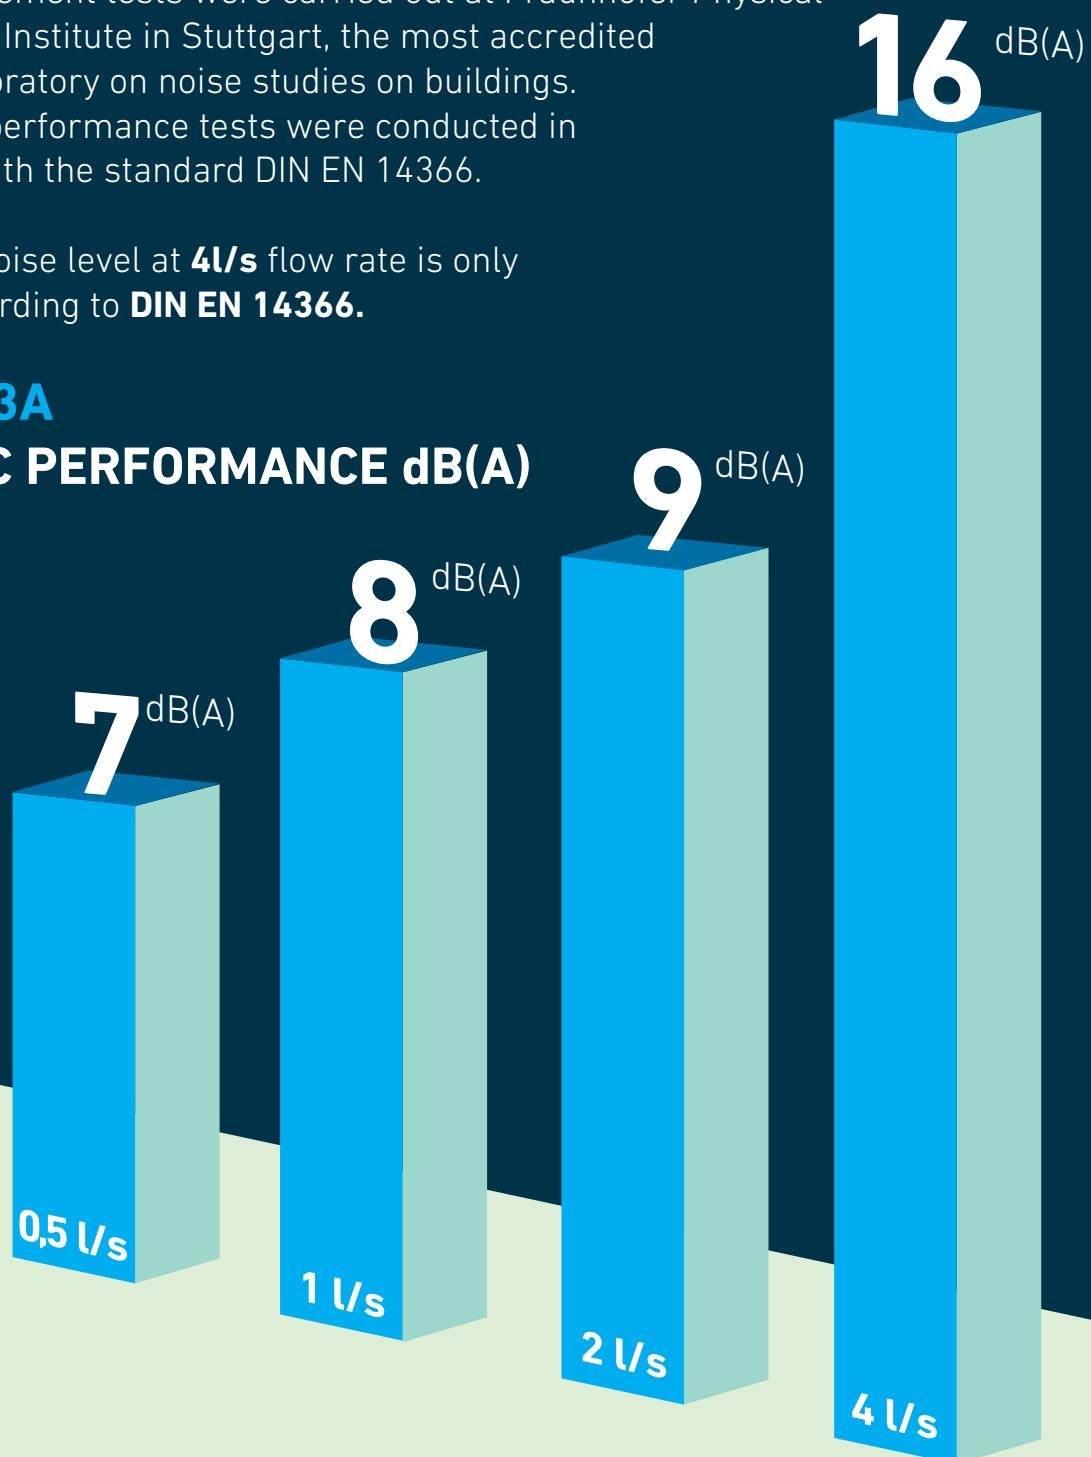

Silenta 3A



Silenta 3A Pipe with Socket

Dia. [mm]	Leng. [mm]	Thick. [mm]	Code	Packing Type	Pc
40	150	1,8	4604004000121	Cartonbox	30
40	250	1,8	4604004000221	Cartonbox	30
40	500	1,8	4604004000321	Cartonbox	35
40	1000	1,8	4604004000421	Bundle	10
40	2000	1,8	4604004000521	Bundle	10
40	3000	1,8	4604004000621	Bundle	10
50	150	2,0	4604005000121	Cartonbox	200
50	250	2,0	4604005000221	Cartonbox	150
50	500	2,0	4604005000321	Cartonbox	90
50	1000	2,0	4604005000421	Bundle	10
50	2000	2,0	4604005000521	Bundle	10
50	3000	2,0	4604005000621	Bundle	10
75	150	2,6	4604007501021	Cartonbox	40
75	250	2,6	4604007501121	Cartonbox	30
75	500	2,6	4604007501221	Cartonbox	40
75	1000	2,6	4604007501321	Bundle	10
75	2000	2,6	4604007501421	Bundle	10
75	3000	2,6	4604007501521	Bundle	10
110	150	3,4	4604011002021	Cartonbox	20
110	250	3,4	4604011002121	Cartonbox	35
110	500	3,4	4604011002221	Cartonbox	20
110	1000	3,4	4604011002321	Bundle	4
110	2000	3,4	4604011002421	Bundle	4
110	3000	3,4	4604011002521	Bundle	4
125	150	3,4	4604012503021	Cartonbox	15
125	250	3,4	4604012503121	Cartonbox	5
125	500	3,4	4604012503221	Cartonbox	6
125	1000	3,4	4604012503321	Bundle	4
125	2000	3,4	4604012503421	Bundle	4
125	3000	3,4	4604012503521	Bundle	4
160	150	4,0	4604016004021	Cartonbox	24
160	250	4,0	4604016004121	Cartonbox	6
160	500	4,0	4604016004221	Cartonbox	8
160	1000	4,0	4604016004321	Bundle	1
160	2000	4,0	4604016004421	Bundle	1
160	3000	4,0	4604016004521	Bundle	1
200	500	4,5	4604020006321	Bundle	5
200	1000	4,5	4604020006421	Length	1
200	2000	4,5	4604020005621	Length	1
200	3000	4,5	4604020005721	Length	1



Silenta 3A Clamp

Dia. (mm)	Code	Packing Type	Pc
50	4701905001022	Cartonbox	100
75	4701907501122	Cartonbox	200
110	4701911001222	Cartonbox	100
125	4701912501322	Cartonbox	100
160	4701916001422	Cartonbox	50



Silenta 3A Elbow 15°

Dia. (mm)	Code	Packing Type	Pc
50	4704105000121	Cartonbox	300
75	4704107500621	Cartonbox	150
110	4704111001121	Cartonbox	60
160	4704116001121	Cartonbox	20



Silenta 3A Elbow 30°

Dia. (mm)	Code	Packing Type	Pc
50	4704105000221	Cartonbox	350
75	4704107500721	Cartonbox	150
110	4704111001221	Cartonbox	60
160	4704116001221	Cartonbox	20



Silenta 3A Elbow 45°

Dia. (mm)	Code	Packing Type	Pc
50	4704105000321	Cartonbox	150
75	4704107500921	Cartonbox	50
110	4704111001321	Cartonbox	50
125	4704112501621	Cartonbox	15
160	4704116001821	Cartonbox	6
200	4704120002021	Cartonbox	10



Silenta 3A Elbow 67,5°

Dia. (mm)	Code	Packing Type	Pc
50	4704105000421	Cartonbox	300
75	4704107500821	Cartonbox	150
110	4704111001421	Cartonbox	50



Silenta 3A Elbow 87,5°

Dia. (mm)	Code	Packing Type	Pc
50	4704105000521	Cartonbox	150
75	4704107501021	Cartonbox	50
110	4704111001521	Cartonbox	40
125	4704112501721	Cartonbox	10
160	4704116001921	Cartonbox	6
200	4704120002121	Cartonbox	6



Silenta 3A Long Elbow 45°

Dia. (mm)	Code	Packing Type	Pc
110	4704111004521	Cartonbox	8



Silenta 3A Pipe without Socket

Dia. [mm]	Leng. [mm]	Thick. [mm]	Code	Packing Type	Pc
200	500	4,5	4604020005221	Cartonbox	8
200	1000	4,5	4604020005321	Length	1
200	2000	4,5	4604020005421	Length	1
200	3000	4,5	4604020005521	Length	1

Silenta 3A



Silenta 3A Branch 45°

Dia. (mm)	Code	Packing Type	Pc
50-50	470420500121	Cartonbox	50
75-50	4704207500221	Cartonbox	20
75-75	4704207500321	Cartonbox	10
110-50	4704211000421	Cartonbox	40
110-75	4704211000521	Cartonbox	30
110-110	4704211000621	Cartonbox	20
125-50	4704212500721	Cartonbox	15
125-75	4704212500821	Cartonbox	10
125-110	4704212500921	Cartonbox	8
125-125	4704212501021	Cartonbox	6
160-110	4704216001121	Cartonbox	10
160-125	4704216001221	Cartonbox	10
160-160	4704216001321	Cartonbox	8
200-110	4704220001421	Cartonbox	4
200-125	4704220001521	Cartonbox	4
200-160	4704220001621	Cartonbox	4
200-200	4704220001721	Cartonbox	4



Silenta 3A Reducer

Dia. (mm)	Code	Packing Type	Pc
40-32	4704404000521	Cartonbox	750
50-32	4704405000021	Cartonbox	500
50-40	4704405000121	Cartonbox	500
75-50	4704407500121	Cartonbox	100
110-50	4704411000221	Cartonbox	50
110-75	4704411000321	Cartonbox	40
125-110	4704412500421	Cartonbox	25
160-110	4704416000521	Cartonbox	20
160-125	4704416000721	Cartonbox	20
200-160	4704420000621	Cartonbox	10



Silenta 3A Branch 67,5°

Dia. (mm)	Code	Packing Type	Pc
110-110	4704211000721	Cartonbox	25



Silenta 3A Socket with Central Register

Dia. (mm)	Code	Packing Type	Pc
50	470450500121	Cartonbox	50
75	4704507500221	Cartonbox	20
110	4704511000321	Cartonbox	10
160	4704516000421	Cartonbox	6
200	4704520000521	Cartonbox	12



Silenta 3A Branch 87,5°

Dia. (mm)	Code	Packing Type	Pc
50-50	4704205001821	Cartonbox	30
75-50	4704207501921	Cartonbox	10
75-75	4704207502021	Cartonbox	15
110-50	4704211002121	Cartonbox	50
110-75	4704211002221	Cartonbox	15
110-110	4704211002321	Cartonbox	10
125-110	4704212503822	Cartonbox	20
125-125	4704212503921	Cartonbox	4
160-125	4704216004022	Cartonbox	10



Silenta 3A Sliding Socket

Dia. (mm)	Code	Packing Type	Pc
50	470450500221	Cartonbox	50
75	4704507500321	Cartonbox	35
110	4704511000421	Cartonbox	8
160	4704516000621	Cartonbox	6
200	4704520000721	Cartonbox	4



Silenta 3A Double Branch 45°

Dia. (mm)	Code	Packing Type	Pc
50-50	4704205003021	Cartonbox	15
75-50	4704207503121	Cartonbox	15
110-50	4704211003221	Cartonbox	7
110-110	4704211003421	Cartonbox	6
160-110	4704216003621	Cartonbox	8



*** Silenta 3A S Siphon 45°**

Dia. (mm)	Code	Packing Type	Pc
75	4704607500121	Cartonbox	20
110	4704611000121	Cartonbox	6



Silenta 3A



Silenta 3A Corner Double Branch 87,5°

Dia. (mm)	Code	Packing Type	Pc
110-110	4704211003021	Cartonbox	20



*** Silenta 3A S Siphon 87,5°**

Dia. (mm)	Code	Packing Type	Pc
75	4704607500221	Cartonbox	50
110	4704611000221	Cartonbox	5



Silenta 3A Repair Pipe (Long Socket)

Dia. (mm)	Code	Packing Type	Pc
110	4704911002221	Cartonbox	15



Silenta 3A Clean Out (Circular)

Dia. (mm)	Code	Packing Type	Pc
75	4704311000421	Cartonbox	80



Silenta 3A Floor Trap

Dia. (mm)	Code	Packing Type	Pc
110-75-50-50	4704911002022	Cartonbox	12



Silenta 3A Clean Out (Rectangular)

Dia. (mm)	Code	Packing Type	Pc
110	4704311000121	Cartonbox	30
160	4704316000221	Cartonbox	8



Silenta 3A P-Trap

Dia. (mm)	Code	Packing Type	Pc
110	4704611000521	Cartonbox	25



Silenta 3A Floor Trap - Long

Dia. (mm)	Code	Packing Type	Pc
110-75-50-50	4704911002122	Cartonbox	12



Silence Clamp Metal - Vertical Set

Dia. (mm)	Code	Packing Type	Pc
50	1300905030412	Cartonbox	20
75	1300907530412	Cartonbox	15
110	1300911030412	Cartonbox	10
125	1300912530412	Cartonbox	10
160	1300916030412	Cartonbox	7
200	1300920030412	Cartonbox	5



Silence Clamp Metal - Horizontal

Dia. (mm)	Code	Packing Type	Pc
50	1300905030612	Cartonbox	50
75	1300907530612	Cartonbox	30
110	1300911030612	Cartonbox	25
125	1300912530612	Cartonbox	25
160	1300916030612	Cartonbox	25
200	1300920030612	Cartonbox	20

* To be used only under the WC stone

+GF+

Silenta FR

Fire Resistant and Sound-Insulated Piping Systems

Silenta FR is a Fire Resistant Sound-Insulated soil and waste water pipe system in compliance with TS EN13501, DIN4102 fire tests to building materials standards and acoustic performance of waste water installations measured acc. to EN 14366 standard.

- Silenta FR Fire Resistant Sound-Insulated Piping System reached 12 dB(A) sound intensity level at the flow rate of 4 l/s in the tests conducted by the German Fraunhofer Institute according to EN 14366
- Its fire class value is B-s1, d0 according to TS EN 13501-1
- Produced by mineral additive special formulation
- Made of PVC-U composite material in single layer. This composite layer increases the strength and chemical and physical resistance of pipes and fittings

- High-quality gaskets are used
- Smooth inner and outer surface ensures ease of installation
- No clogging because it does not create residues and lime
- Ensures fast and smooth flow in the system
- Resistant to corrosion
- 100% recyclable and environmentally friendly

+ Fields of Application

- Office buildings, conference halls etc
- Schools, libraries, hospitals, hotels, houses
- All underground drainage systems between the building and the main pipeline
- Sustainable / green buildings
- Industrial areas (short and long-term use)



Fire Classification
(acc. to EN 13501-1)


B : Hardly Combustible
s1 : No Smoke formation
d0 : No Burning Droplets formation



B-s1, d0

12 dB(A)



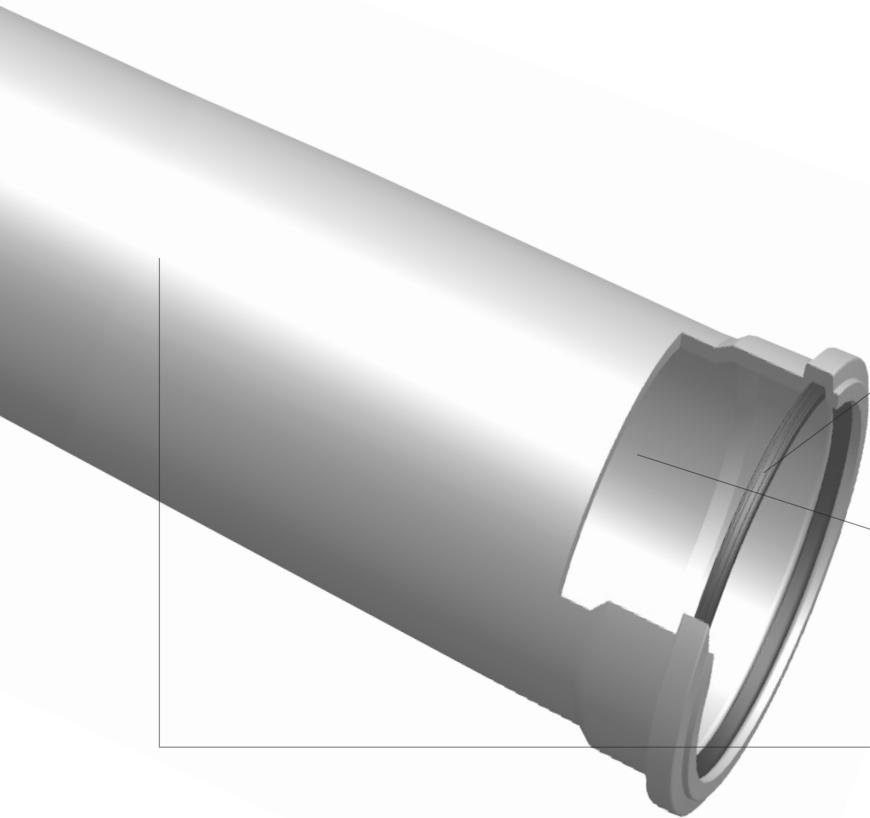

+ Structure

Special Gasket System

It guarantees water tightness with its special gasket structure providing ease of montage. The geometrical properties of the gasket groove ensure fast and easy installation.

Inner Surface

It ensures superior flow performance with its smooth structure. Thanks to chemical durability, it prevents corrosion that occurs in pipe.

Outer Surface

Resistant against impacts and fire. Prevents the spread of fire thanks to its special composite fire-retarding formulation.

+ Technical Properties

Pipe Structure	One Layered (Special PVC composite formulation with fire-retardent and sound absorbing additives)
Diameters [mm]	d50, d75, d110, d125, d160, d200, d250
Pipe Length [mm]	150, 250, 500, 1000, 2000, 3000
Sound Transmission	12 dB(A) at 4 l/s (EN 14366)
Fire class	B1 (DIN 4102), B-s1, d0 (TS EN 13501)
Jointing method	Jointing with Rubber Gasket and Socket (Push-Fit)
Clamping	With GF Hakan Silent pipe clamps
Color	Light Grey
Installation	Very easy to install thanks to its weight lower than cast-iron pipes
Chemical Resistance	Resistant to organic and inorganic chemical environments for pH values between 2 and 12
Installation Temperature	Minimum: -10°C Maximum: 60°C
Operating Temperature	Minimum: -10°C Maximum: 60°C
Application Class	B/D (building / drainage)
Ring Stiffness	ISO/DIN 9969, The ring stiffness is at least 4.0 kN / m ² over the entire range of – dimensions: 50 mm – 250 mm
Impact Strength	Compiles with EN 1451
Approvals and Certificates	Germany: Fraunhofer, Turkey: TSE

Superior Sound-Proof And Non-Flammable Performance

Silenta FR Fire Resistant and Sound-Insulated Pipes


guarantee quality, peace of mind and living comfort.

Acoustic performance of Silenta Premium was accredited by the famous German Fraunhofer Institute, in compliance with DIN 4109 and EN 14366.

Noise measurement tests were carried out at Fraunhofer Physical Constructions Institute in Stuttgart, the most accredited European laboratory on noise studies on buildings. The acoustic performance tests were conducted in compliance with the standard DIN EN 14366.

The emitted noise level at **4 l/s** flow rate, with special GF Hakan Silent clamps, is only **12 dB(A)** according to **DIN EN 14366**.

SILENTA FR ACOUSTIC PERFORMANCE dB(A)

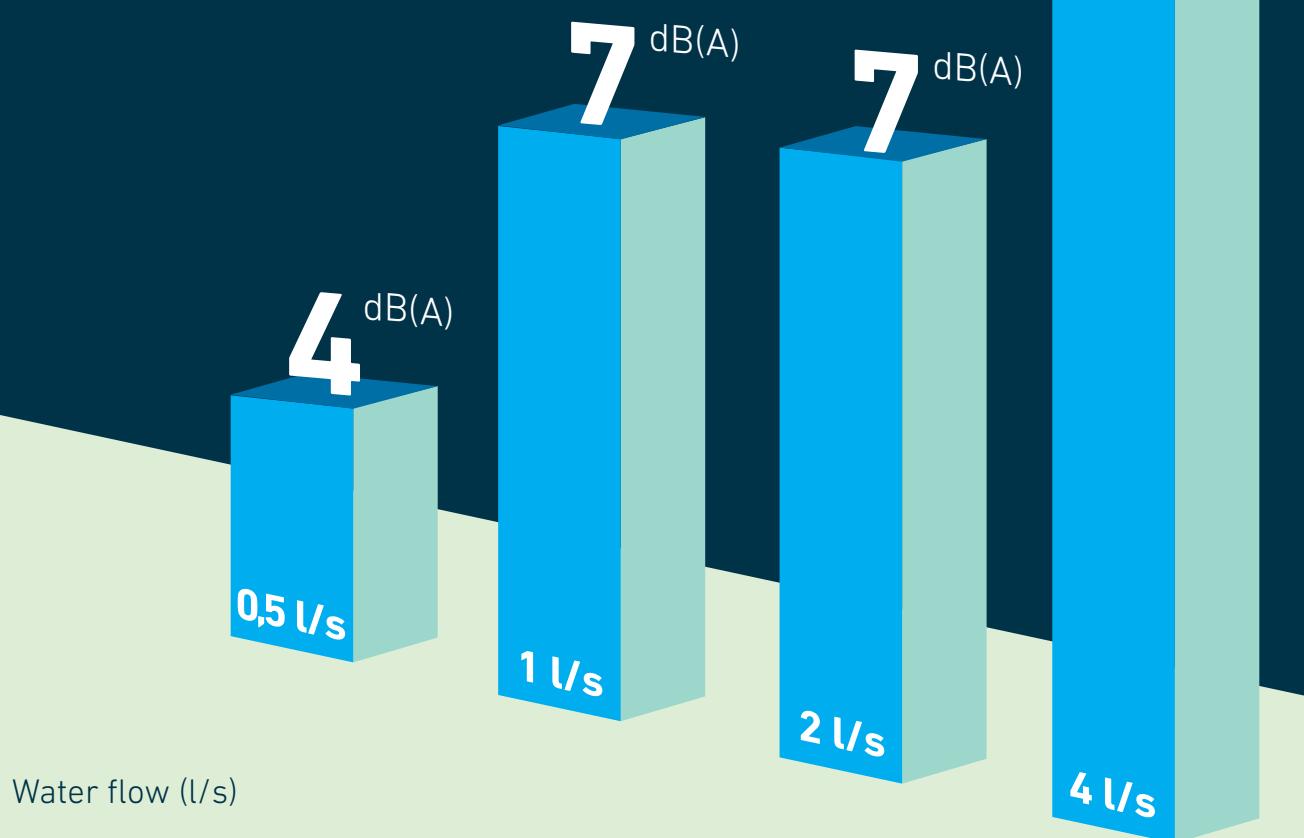

Silenta FR



Silenta FR Pipe with Socket

Dia. [mm]	Leng. [mm]	Thick. [mm]	Code	Packing Type	Pc
50	150	4,0	1000005020111	Cartonbox	30
50	250	4,0	1000005020211	Cartonbox	30
50	500	4,0	1000005020311	Cartonbox	40
50	1000	4,0	1000005020411	Bundle	10
50	2000	4,0	1000005020511	Length	1
50	3000	4,0	1000005020611	Length	1
75	150	4,5	1000007513111	Cartonbox	15
75	250	4,5	1000007513211	Cartonbox	15
75	500	4,5	1000007513311	Cartonbox	19
75	1000	4,5	1000007513411	Bundle	10
75	2000	4,5	1000007513511	Length	1
75	3000	5,3	1000007513611	Length	1
110	150	5,3	1000011015111	Cartonbox	9
110	250	5,3	1000011015211	Cartonbox	6
110	500	5,3	1000011015311	Cartonbox	9
110	1000	5,3	1000011015411	Bundle	4
110	2000	5,3	1000011015511	Length	1
110	3000	5,3	1000011015611	Length	1
125	250	5,3	1000012517211	Cartonbox	11
125	500	5,3	1000012517311	Cartonbox	6
125	1000	5,3	1000012517411	Bundle	4
125	2000	5,3	1000012517511	Length	1
125	3000	5,3	1000012517611	Length	1
* 160	150	5,3	1000016018111	Cartonbox	12
* 160	250	5,3	1000016018211	Cartonbox	6
* 160	500	5,3	1000016018311	Cartonbox	4
* 160	1000	5,3	1000016018411	Bundle	3
* 160	2000	5,3	1000016018511	Length	1
* 160	3000	5,3	1000016018611	Length	1
* 200	500	6,2	1000020021211	Length	1
* 200	1000	6,2	1000020021311	Length	1
* 200	2000	6,2	1000020021411	Length	1
* 200	3000	6,2	1000020021511	Length	1
* 200	6000	6,2	1000020021611	Length	1

Products marked by "*" are produced as Clean Water Muff.



Silenta FR Elbow 45°

Dia. (mm)	Code	Packing Type	Pc
50	1300105000511	Cartonbox	40
75	1300107501011	Cartonbox	30
110	1300111001811	Cartonbox	20
125	1300112502011	Cartonbox	8
160	1300116002811	Cartonbox	8
200	1300120002711	Cartonbox	4
250	1300125003011	Cartonbox	1



Silenta FR Elbow 87,5°

Dia. (mm)	Code	Packing Type	Pc
50	1300105000611	Cartonbox	60
75	1300107501111	Cartonbox	25
110	1300111001911	Cartonbox	8
125	1300112502111	Cartonbox	15
160	1300116002911	Cartonbox	6
200	1300120002811	Cartonbox	3



Silenta FR Branch 45°

Dia. (mm)	Code	Packing Type	Pc
50-50	1300205004611	Cartonbox	20
75-50	1300207504511	Cartonbox	20
75-75	1300207504611	Cartonbox	10
110-50	1300211004911	Cartonbox	15
110-75	1300211005011	Cartonbox	10
110-110	1300211005111	Cartonbox	10
125-50	1300212505411	Cartonbox	10
125-75	1300212505511	Cartonbox	10
125-110	1300212505211	Cartonbox	6
125-125	1300212505311	Cartonbox	6
160-110	1300216006011	Cartonbox	5
160-125	1300216006111	Cartonbox	2
160-160	1300216006211	Cartonbox	3
200-110	1300220006011	Cartonbox	3



Silenta FR Branch 87,5°

Dia. (mm)	Code	Packing Type	Pc
50-50	1300205008611	Cartonbox	40
75-50	1300207508511	Cartonbox	40
75-75	1300207508611	Cartonbox	30
110-50	1300211009111	Cartonbox	18
110-75	1300211009211	Cartonbox	18
110-110	1300211009311	Cartonbox	5
160-110	1300216009411	Cartonbox	5
160-160	1300216009111	Cartonbox	4



Silenta FR Pipe without Socket

Dia. [mm]	Leng. [mm]	Thick. [mm]	Code	Packing Type	Pc
200	150	6,2	1000020020011	Length	1
200	250	6,2	1000020020111	Length	1
200	500	6,2	1000020020211	Length	1
200	1000	6,2	1000020020311	Length	1
200	2000	6,2	1000020020411	Length	1
200	3000	6,2	1000020020511	Length	1
250	500	6,2	1000025020211	Length	1
250	1000	6,2	1000025020311	Length	1
250	2000	6,2	1000025020411	Length	1
250	3000	6,2	1000025020511	Length	1



Silenta FR



Silenta FR Double Branch 45°

Dia. (mm)	Code	Packing Type	Pc
110-50	1300211012911	Cartonbox	15
110-110	1300211012711	Cartonbox	6



Silenta FR Reducer

Dia. (mm)	Code	Packing Type	Pc
75-50	1300407518211	Cartonbox	50
110-50	1300411017911	Cartonbox	25
110-75	1300411018411	Cartonbox	25
125-110	1300412518611	Cartonbox	12
160-110	1300416018711	Cartonbox	8
160-125	1300416018811	Cartonbox	14

Silenta FR Socket with Central Register



Dia. (mm)	Code	Packing Type	Pc
125	1300512520411	Cartonbox	30
160	1300516020511	Cartonbox	12



Silence Clamp Metal - Vertical Set

Dia. (mm)	Code	Packing Type	Pc
50	1300905030412	Cartonbox	20
75	1300907530412	Cartonbox	15
110	1300911030412	Cartonbox	10
125	1300912530412	Cartonbox	10
160	1300916030412	Cartonbox	7
200	1300920030412	Cartonbox	5



Silenta Clamp Metal - Horizontal

Dia. (mm)	Code	Packing Type	Pc
50	1300905030612	Cartonbox	50
75	1300907530612	Cartonbox	30
110	1300911030612	Cartonbox	25
125	1300912530612	Cartonbox	25
160	1300916030612	Cartonbox	25
200	1300920030612	Cartonbox	20

Silenta FR Sliding Socket



Dia. (mm)	Code	Packing Type	Pc
75	1300507520311	Cartonbox	90
125	1300512520511	Cartonbox	30
160	1300516020611	Cartonbox	2

What is Sound Insulation Performance?


Sound insulation performance is the sound insulation capability of the system against the vibrations that occur between the pipes used in the waste water installation and the fluids transmitted through these pipes. With Silenta Premium, Silenta 3A and Silenta FR Piping Systems, GF Hakan Plastik offers ultimate solutions against the sounds created in the installations.

Sources of sounds in the buildings can be listed as follows:

- Flushing
- Clogging of the flowing direction
- High water speeds
- Joints
- Discharge
- Wrong planning
- Faulty design

Due to critical drainage conditions, local vibrations occur in the piping system passages. They could have adverse impacts on sound characteristics.


To minimize and eliminate these impacts, Silenta Product Ranges reduce noise in the sound-critical areas with elbows having nominal widths of DN 58-DN 200, and ensures better noise reduction in the affected areas.

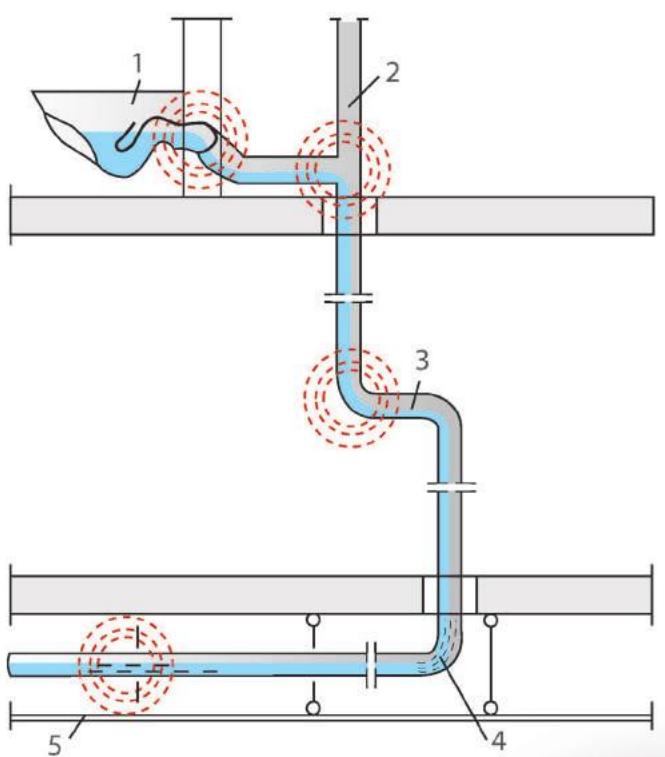

Why is Sound Protection Necessary?

Sound protection measures in a building aims to minimize the noise pollution in the rooms. Residents need to be protected against the noises emitted through air or caused by the building.

Unpleasant noises within the building as caused directly (created by the building) or indirectly (for example due to the construction engineering systems) can be easily resolved with the use of Silenta Product Range.

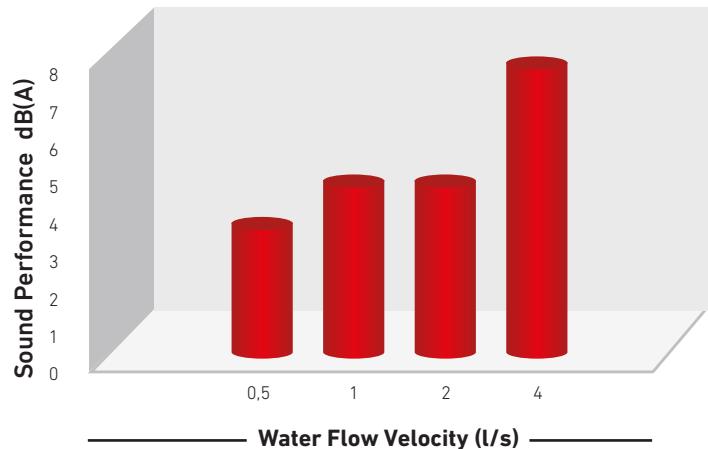


The above graphics indicate the results of the acoustic tests conducted by Fraunhofer Building Physics Institute.

*Silenta Extreme 18 dB(A) at 4 l/s flow rate
Silenta Premium 13 dB(A) at 4 l/s flow rate
Silenta 3A 16 dB(A) at 4 l/s flow rate
Silenta FR 12 dB(A) at 4 l/s flow rate*

Building Technology (BT) Soil and Waste Water Pipe Range Installation Instructions

- Silenta Extreme Fire Resistant and Noise-Insulated Halogen Free Piping Systems
- Silenta Premium Sound-Insulated Piping Systems
- Silenta 3A Sound-Insulated Piping Systems
- Silenta FR Fire Resistant and Sound-Insulated Piping Systems

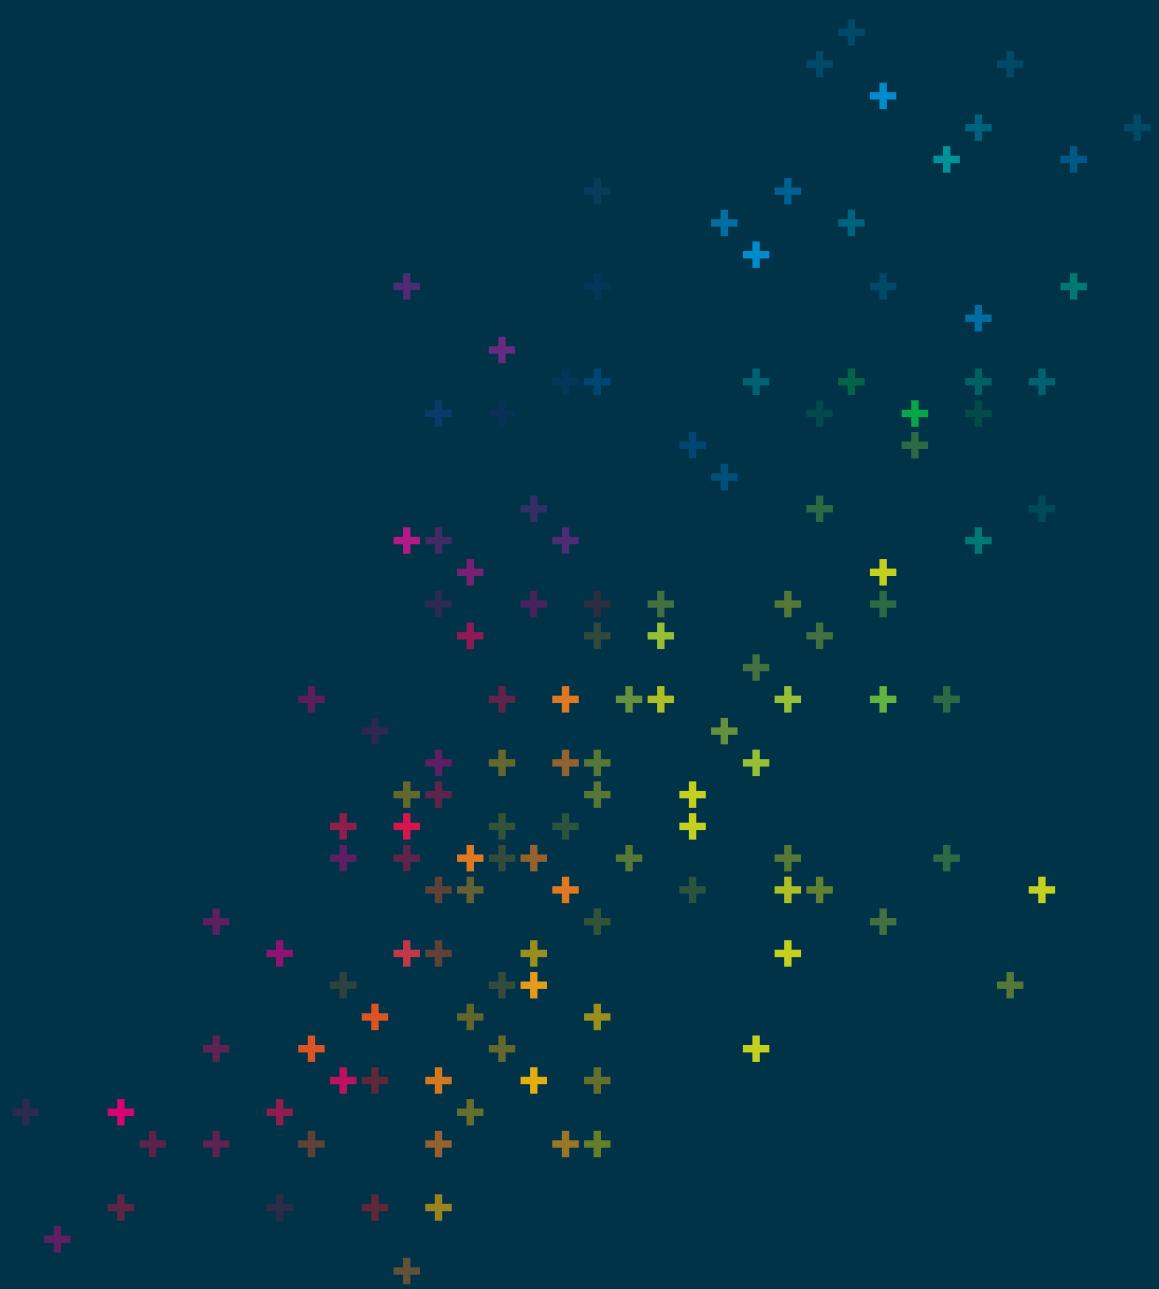


+GF+

Installation




Make sure that your products are clean. If necessary, wipe the jointing points with a dry cloth.

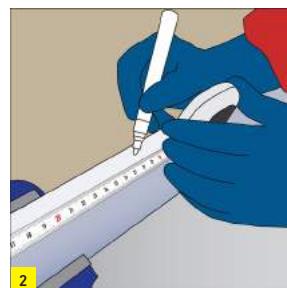

When interval measurements are required, mark the pipe with the desired measurements.




Cut in 90° angle by using a coping saw or a proper cutter.

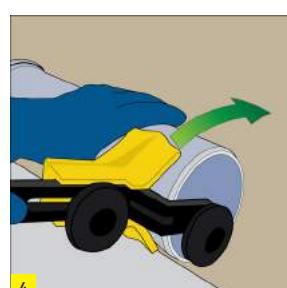


Chamfer the spigot of pipe by using a chamfering device or thick riffler.




Remove the burrs on the external edges with a knife or scraper.

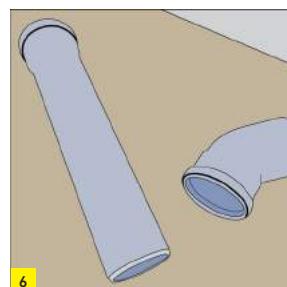


Now, your pipe is ready for installation.

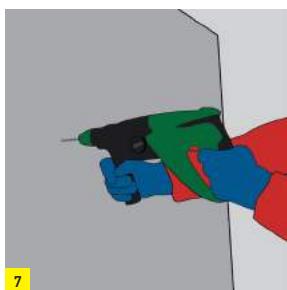

Drill the marked points with a driller and place dowels into the holes.

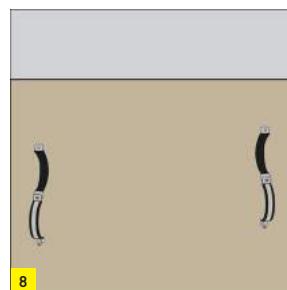


Mark the pipe clamp distances properly with 1% inclination on the wall or ceiling where they will be installed. (as flat wall)

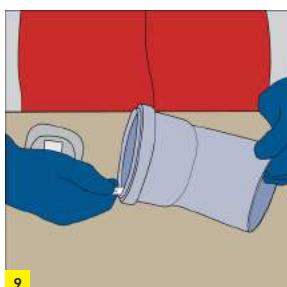

Mark the part of the pipe that will be attached to the fitting as much as the jointing distance.



Apply a lubricating liquid (silicone etc.) to the socket part of the pipe.

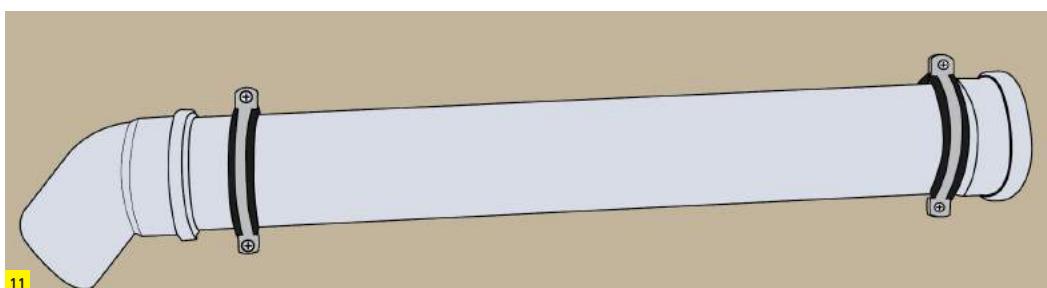

After the pipe and fittings are jointed, place them and tighten the clamps.

Installation

Rubber Ring (Push Fit) Jointing

- 1- Mouth of the pipe should be absolutely chamfered. If the mouth of the pipe was cut, it should be chamfered.
- 2- Check if the sealing gasket is accurately placed on the pipe or fitting socket groove.
- 3- All installation parts should be dry and clean. There should be no deformation, notches or similar scratches on the pipes or fittings.
- 4- Apply a proper silicone-based lubricating liquid on the spigot end of the pipe or fitting. Do not use liquid soap, grease or similar petroleum derivatives.

- 5- Parts to be jointed should be levelled.
- 6- Push the spigot end of the pipe or fitting into the socket completely. If the application is longer than 2 m, pull the spigot end 10 mm back after placing it into the socket completely, to prevent the effects of thermal expansion.
- 7- Finally, check again if the gap left for thermal expansion still exists or not.

Pipe Hanging and Clamping

Always use GF Hakan silent pipe clamp to minimize the sound caused by vibration. Maximum clamping distances of the pipes should always comply with the values provided in the following table.

- 1- While fixing the pipe with clamps, pay special attention to not cause any tension and stress on pipes.
- 2- Pipe cannot move after tightening the screws of the fixed clamps. For sliding clamps, pipe will continue to move inside the clamp even after tightening the screws.
- 3- For each line longer than 2 m, use 1 fixed clamp immediately after the muff part.
- 4- In vertical lines, always place the fixed clamp on the top point of the pipe and below the socket part.

- 5- While fitting the fixed clamp, pay attention to keep 10 mm distance left on the flat end for expansion.
- 6- Use a fixed clamp after each fitting or fitting group.
- 7- All clamps to be added to the system apart from the fixed clamps in the horizontal or vertical line should be sliding clamp that allows for thermal expansion caused by temperature changes.
- 8- Pipes and fittings should be fixed in short distances so that they do not slide and release.

Maximum distances between the clamps

Nominal External Diameter DN [mm]	Clamp Distance	
	For Horizontal Pipe Directions* Dmax m (max. 15 x da)	For Vertical Pipe Directions* Dmax. m
50	0,75	1,50
75	1,10	2,00
90	1,35	2,00
110	1,65	2,00
125	1,85	2,00
160	2,40	2,00
200	3,00	2,00
250	3,00	2,00

Installation

Silent Pipe Clamp

Silent waste water piping systems are tested by the German Fraunhofer Building Physics Institute in accordance with EN 14366 standard, and the reports about sound level are issued by this institute.

In the test equipment used in this institute, sound levels are measured at different flows and different parts of the building.

In the vertical lines, one group double and one single clamp should be used on each floor. In the horizontal lines, it is more suitable to use single clamp.


The test equipment in the institute laboratory is standard and the tests related to all waste water systems are conducted here. As seen in the test equipment below, pipe, fittings, installation wall thickness, water discharge amount as well as silent pipe clamp systems are also significant factors in the test report.



Clamp Details

The clamp on top, which is one of the double clamps used in the vertical lines, is fully tightened and grasps the pipe. The lower clamp is tightened up to the plastic wedges on the clamp. It is ensured that the rubber surfaces of the clamp are not jointed. In this system, the purpose is to absorb the vibration transmitted from waste water to pipe inside the first clamp and to minimize the vibration on the wall through the second clamp.

The single clamp in the vertical lines is tightened up to the plastic wedges on the clamp and it is ensured that the pipe is fixed to the wall. The single clamp in the horizontal lines is tightened up to the plastic wedges on the clamp and it is ensured that the pipe is fixed to the ceiling or wall.

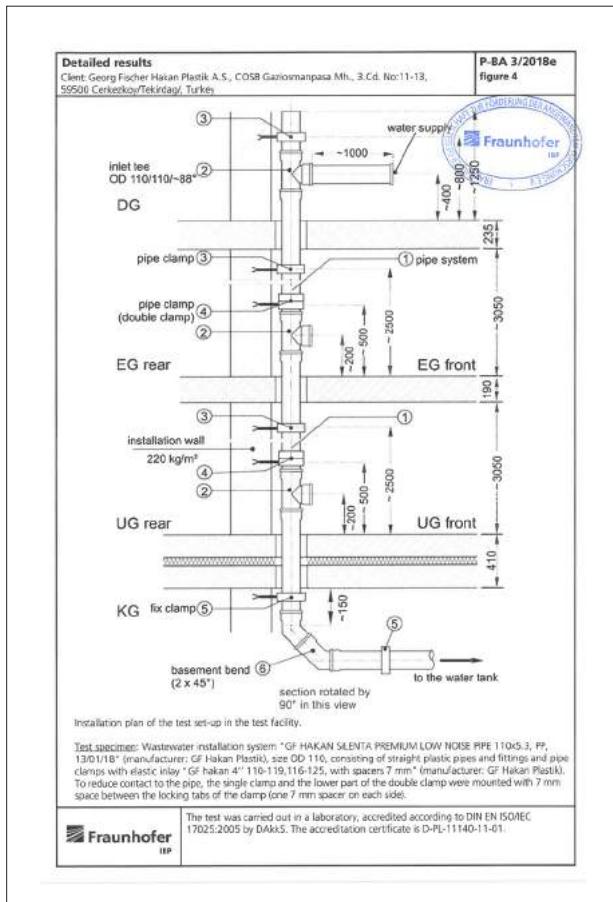

To achieve maximum acoustic performance, the silent pipe clamps used in the test should be used in the installations as well.

Although there are different types of silent pipe clamps, they are available in two kinds as fixed and movable.

The noise created in the waste water systems is transmitted by two methods as air born and structure born.

1- Sound waves transmitted through air cause pressure in the ambient and result in vibration on the objects and surfaces that they hit. Thanks to the special formulas used in GF Hakan Plastik Silenta products, these vibrations are absorbed and prevented from being transferred out of pipe.


2- Sound waves transmitted through contact occur as a result of the waste water and waste hitting the pipe wall. These vibrations are transferred on the wall of the installation through contact. The sound created by contact is significantly absorbed by the special molecular structure of Silenta and specially-designed GF Hakan silent clamps.

Installation

GF Hakan silent waste water pipe clamps ensure EN 14366 silence norms. In the waste water systems within buildings, cased clamps, their positions and distances are as important as silent pipes and fittings.

The clamp on top, which is one of the double clamps used in the vertical lines, is fully tightened and grasps the pipe. The lower clamp is tightened up to the plastic wedges on the clamp. It is ensured that the rubber surfaces of the clamp are not jointed. In this system, the purpose is to absorb the vibration transmitted from waste water to pipe inside the first clamp and to minimize the vibration on the wall through the second clamp.

The single clamp in the horizontal lines is tightened up to the plastic wedges on the clamp and it is ensured that the pipe is fixed to the ceiling or wall.


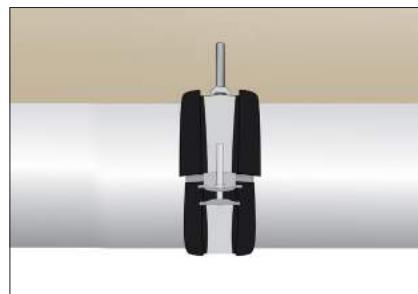


Packaging, Storage and Transportation



Packaging


GF Hakan Plastik pipes and fittings are packed as ready for transport in a customer-friendly way. Packing ensures safety, efficient storage and easy transport.

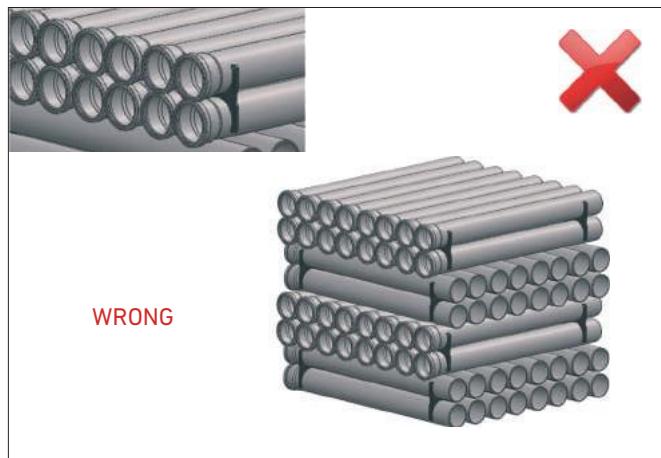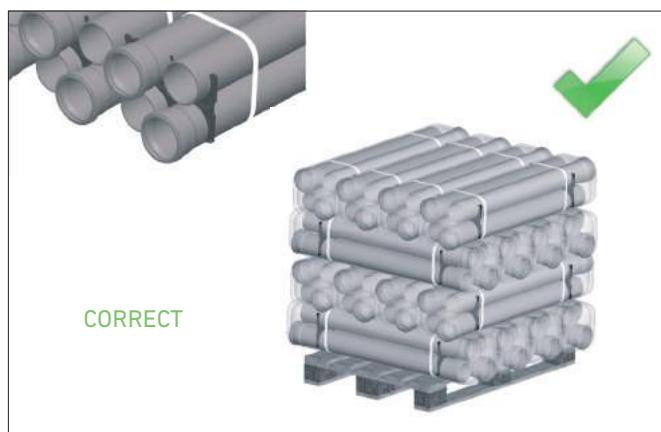

Pipes and fittings with socket are placed in a way that they will not stay on top of each other.



Pipes are packed by plastic clamps to hold them together. Stretch film is applied to protect pipes from pipes dust and stains.

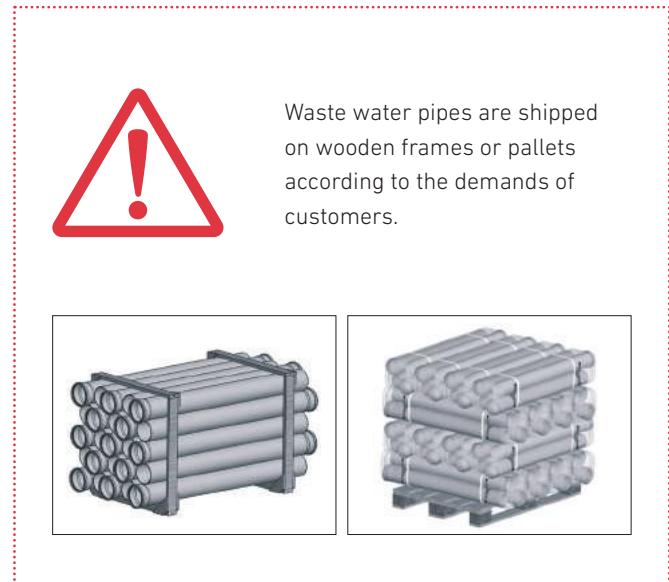

Short parts with the length of 150, 250 and 500 mm are packed in carton boxes like connection parts.




All product ranges are identified in the Warehouse Management System (WMS) by barcode label. Barcode system ensures management of products and prevents complexity and errors during storage and loading.

Storage




Method of storage should not cause any outflow and should not damage the pipes. As long as they are stored properly, no permanent deformations or damages will occur on the pipes and fittings. Pipes should not be stacked above 1,5 m. Pipes should be safe against sliding.

Pipes packed in the factory might be stacked on wooden frames. Appropriate materials such as pallet etc. should be used to prevent any damage on the socket parts of the pipes stored for a long time. This also makes it easier to lift the pipes by from the flor.

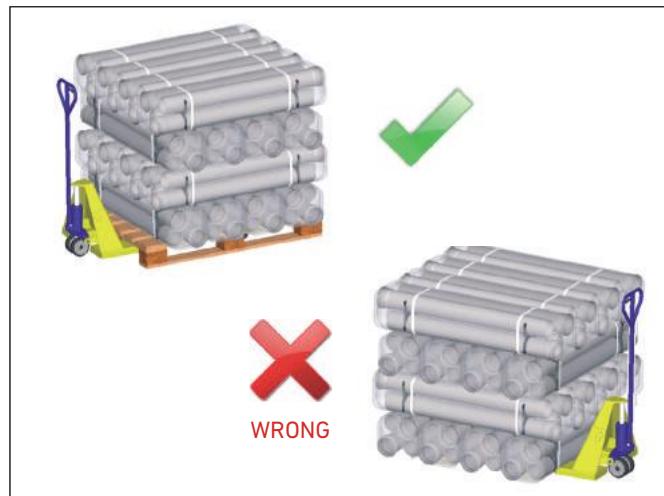

Pipes and fittings packed in carton boxes should be protected against moisture.

Carton boxes should be sealed and stored in a dry area.

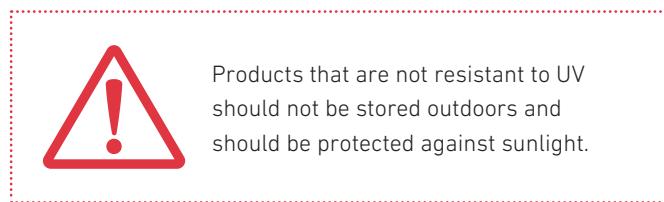

Transportation

Pipes should be carefully transported to prevent any damages. Avoid sudden and hard pressures on pipes and fittings that might cause freezing in cold weather conditions. Ensure that pipes are not滑倒 and dropped on the floor. Loading and unloading and packing of pipes in a block should be carried out by means of forklifts having flat threads and extensions.



Notes

Worldwide at home

Our sales companies and representatives ensure local customer support in more than 100 countries.

www.gfps.com

Argentina / Southern South America

Georg Fischer Central Plastics Sudamérica S.R.L.
Buenos Aires / Argentina
Phone +54 11 4512 02 90
gfcentral.ps.ar@georgfischer.com
www.gfps.com/ar

Australia

George Fischer Pty Ltd
Riverwood NSW 2210
Phone +61 (0) 2 9502 8000
australia.ps@georgfischer.com
www.gfps.com/au

Austria

Georg Fischer Rohrleitungssysteme GmbH
3130 Herzogenburg
Phone +43 (0) 2782 856 43-0
austria.ps@georgfischer.com
www.gfps.com/at

Belgium / Luxembourg

Georg Fischer NV/SA
1600 Sint-Pieters-Leeuw / Belgium
Phone +32 (0) 2 556 40 20
Fax +32 (0) 2 524 34 26
be.ps@georgfischer.com
www.gfps.com/be

Brazil

Georg Fischer Sist. de Tub. Ltda.
04571-020 São Paulo/SP
Phone +55 (0) 11 5525 1311
br.ps@georgfischer.com
www.gfps.com/br

Canada

Georg Fischer Piping Systems Ltd
Mississauga, ON L5T 2B2
Phone +1 (905) 670 8005
Fax +1 (905) 670 8513
ca.ps@georgfischer.com
www.gfps.com/ca

China

Georg Fischer Piping Systems Ltd
Shanghai 201319
Phone +86 21 3899 3899
china.ps@georgfischer.com
www.gfps.com/cn

Denmark / Iceland

Georg Fischer A/S
2630 Taastrup / Denmark
Phone +45 (0) 70 22 19 75
info.dk.ps@georgfischer.com
www.gfps.com/dk

Finland

Georg Fischer AB
01510 Vantaa
Phone +358 (0) 9 586 58 25
Fax +358 (0) 9 586 58 29
info.fi.ps@georgfischer.com
www.gfps.com/fi

France

Georg Fischer SAS
95932 Roissy Charles de Gaulle Cedex
Phone +33 (0) 1 41 84 68 84
fr.ps@georgfischer.com
www.gfps.com/fr

Germany

Georg Fischer GmbH
73095 Albershausen
Phone +49 (0) 7161 302 0
info.de.ps@georgfischer.com
www.gfps.com/de

India

Georg Fischer Piping Systems Pvt. Ltd
400 083 Mumbai
Phone +91 22 4007 2000
Fax +91 22 4007 2020
branchoffice@georgfischer.com
www.gfps.com/in

Indonesia

PT Georg Fischer Indonesia
Karawang 41371, Jawa Barat
Phone +62 267 432 044
Fax +62 267 431 857
indonesia.ps@georgfischer.com
www.gfps.com/id

Italy

Georg Fischer S.p.A.
20864 Agrate Brianza (MB)
Phone +39 02 921 86 1
Fax +39 02 921 86 24 7
it.ps@georgfischer.com
www.gfps.com/it

Japan

Georg Fischer Ltd
530-0003 Osaka
Phone +81 (0) 6 6341 2451
jp.ps@georgfischer.com
www.gfps.com/jp

Korea

Georg Fischer Korea Co. Ltd
Unit 2501, U-Tower
120 Heungdeok Jungang-ro
(Yeongdeok-dong)
Giheung-gu, Yongin-si, Gyeonggi-do
Phone +82 31 8017 1450
Fax +82 31 217 1454
kor.ps@georgfischer.com
www.gfps.com/kr

Malaysia

George Fischer (M) Sdn. Bhd.
41200 Klang, Selangor Darul Ehsan
Phone +60 (0) 3 3122 5585
Fax +60 (0) 3 3122 5575
my.ps@georgfischer.com
www.gfps.com/my

Mexico / Northern Latin America

Georg Fischer S.A. de C.V.
CP 66603 Apodaca, Nuevo León / Mexico
Phone +52 (81) 1340 8586
Fax +52 (81) 1522 8906
mx.ps@georgfischer.com
www.gfps.com/mx

Middle East

Georg Fischer Piping Systems (Switzerland) Ltd
Dubai / United Arab Emirates
Phone +971 4 289 49 60
gcc.ps@georgfischer.com
www.gfps.com/int

Netherlands

Georg Fischer N.V.
8161 PA Epe
Phone +31 (0) 578 678 222
nl.ps@georgfischer.com
www.gfps.com/nl

New Zealand

Georg Fischer Ltd
5018 Upper Hutt
Phone +04 527 9813
Fax +04 527 9834
nz.ps@georgfischer.com
www.gfps.com/nz

Norway

Georg Fischer AS
1351 Rud
Phone +47 67 18 29 00
no.ps@georgfischer.com
www.gfps.com/no

Philippines

George Fischer Pte. Ltd.
Philippines Representative Office
1500 San Juan City
Phone +632 571 2365
Fax +632 571 2368
sgp.ps@georgfischer.com
www.gfps.com/sg

Poland

Georg Fischer Sp. z o.o.
05-090 Sekocin Nowy
Phone +48 (0) 22 31 31 0 50
poland.ps@georgfischer.com
www.gfps.com/pl

Romania

Georg Fischer Piping Systems (Switzerland) Ltd
020257 Bucharest - Sector 2
Phone +40 (0) 21 230 53 80
ro.ps@georgfischer.com
www.gfps.com/int

Russia

Georg Fischer Piping Systems (Switzerland) Ltd
Moscow 125040
Phone +7 495 748 11 44
ru.ps@georgfischer.com
www.gfps.com/ru

Singapore

George Fischer Pte Ltd
528 872 Singapore
Phone +65 6747 0611
Fax +65 6747 0577
sgp.ps@georgfischer.com
www.gfps.com/sg

Spain / Portugal

Georg Fischer S.A.
28046 Madrid / Spain
Phone +34 (0) 91 781 98 90
es.ps@georgfischer.com
www.gfps.com/es

Sweden

Georg Fischer AB
117 43 Stockholm
Phone +46 (0) 8 506 775 00
info.se.ps@georgfischer.com
www.gfps.com/se

Switzerland

Georg Fischer Rohrleitungssysteme (Schweiz) AG
8201 Schaffhausen
Phone +41 (0) 52 631 3026
ch.ps@georgfischer.com
www.gfps.com/ch

Taiwan

Georg Fischer Co. Ltd
San Chung Dist., New Taipei City
Phone +886 2 8512 2822
Fax +886 2 8512 2823
www.gfps.com/tw

United Kingdom / Ireland

George Fischer Sales Limited
Coventry, CV2 2ST / United Kingdom
Phone +44 (0) 2476 535 535
uk.ps@georgfischer.com
www.gfps.com/uk

USA / Caribbean

Georg Fischer LLC
92618 Irvine, CA / USA
Phone +1 714 731 8800
Fax +1 714 731 6201
us.ps@georgfischer.com
www.gfps.com/us

Vietnam

George Fischer Pte Ltd
Representative Office
Ho Chi Minh City
Phone +84 28 3948 4000
Fax +84 28 3948 4010
sgp.ps@georgfischer.com
www.gfps.com/vn

International

Georg Fischer Piping Systems (Switzerland) Ltd
8201 Schaffhausen / Switzerland
Phone +41 (0) 52 631 3003
Fax +41 (0) 52 631 2893
info.export@georgfischer.com
www.gfps.com/int

The information and technical data (altogether "Data") herein are not binding, unless explicitly confirmed in writing.
The Data neither constitutes any expressed, implied or warranted characteristics, nor guaranteed properties or a guaranteed durability. All Data is subject to modification. The General Terms and Conditions of Sale of Georg Fischer Piping Systems apply.



Georg Fischer Hakan Plastik Boru ve Profil San. Tic. A.Ş.

www.gfps.com/tr

f in / gfhakanplastik

Regional Directorates

İstanbul

Ofishane Plaza
Merkez Mahallesi Cendere Caddesi
No:22 Kat:11
34400 Kağıthane / İSTANBUL
Tel: +90 212 809 20 33 (pbx)
Fax: +90 212 809 20 37

Antalya

İnci Plaza Yenigün Mh. 1054. Sok.
No:15 Ofis No:8
Muratpaşa / ANTALYA
Tel: +90 242 321 58 03
Fax: +90 242 321 58 53

Diyarbakır

Şanlıurfa Bulvarı Fırat Mh.
Ahmede Hani Cd. No:4
Yektower İş Merkezi No:13/39
Kayapınar / DİYARBAKIR
Tel: +90 412 251 18 20
Fax: +90 412 251 18 25

Samsun

Kuzey Yıldızı Mah. 100.Yıl Bulv.
No:38 Kat:4 Daire:23 Baran Plaza
Çanık / SAMSUN
Tel: +90 362 256 02 33 - 03 33

Ankara

Mustafa Kemal Mahallesi
2131. Cadde Akay İş Merkezi 30-9
Çankaya / ANKARA

Production Facilities

Tekirdağ / Çerkezköy

Organize San. Bölgesi Gaziosmanpaşa
Mh. 3. Cd. No:11-13
Çerkezköy / TEKİRDAĞ
Tel: +90 282 726 64 43 (pbx)
Fax: +90 282 726 99 33

Şanlıurfa

Şanlıurfa-Gaziantep Karayolu 16. Km
2. Organize San. Bölgesi 1. Cd. No:3
ŞANLIURFA
Tel: +90 414 369 18 30
Fax: +90 414 369 17 96