



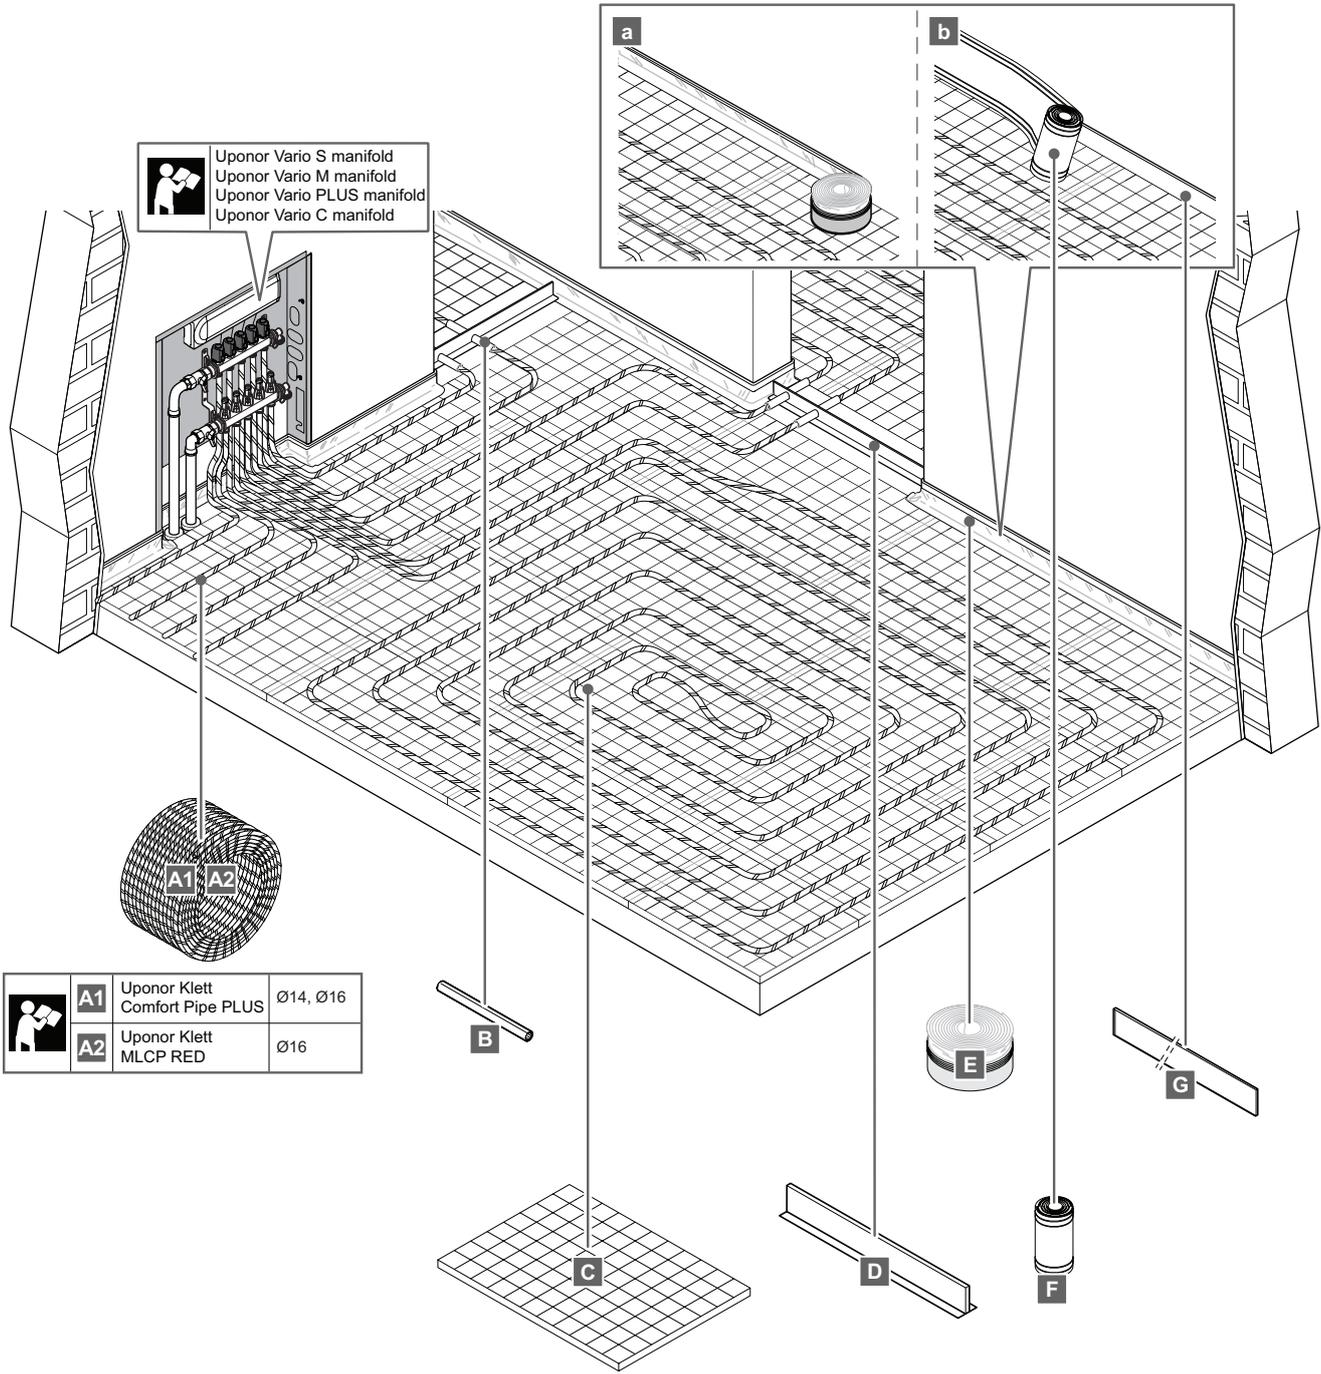
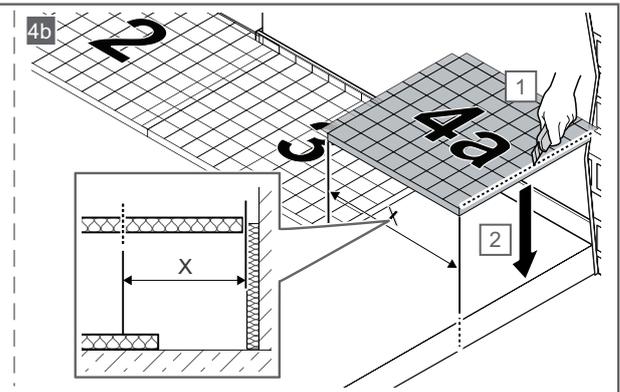
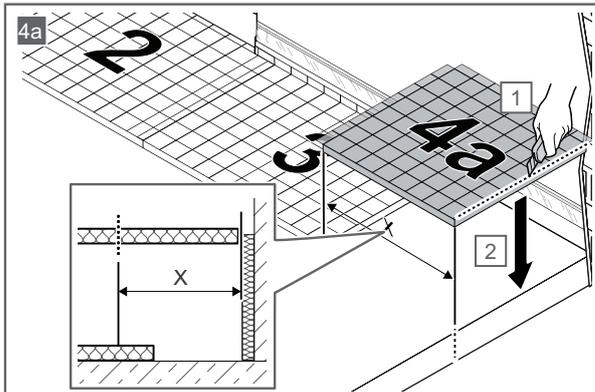
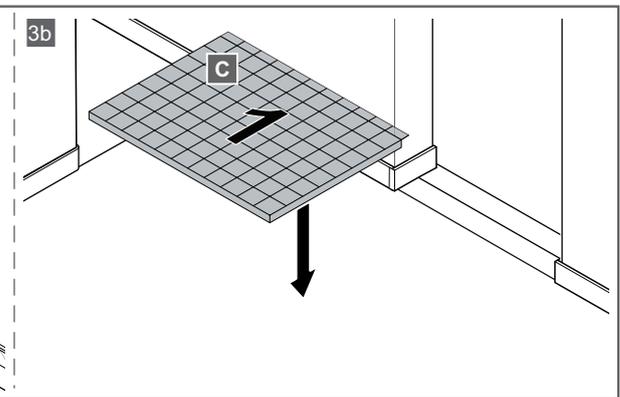
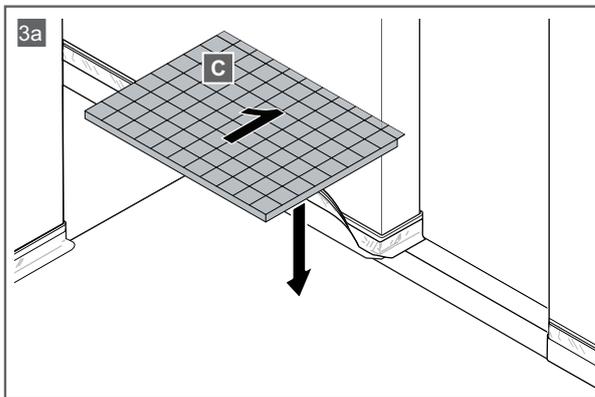
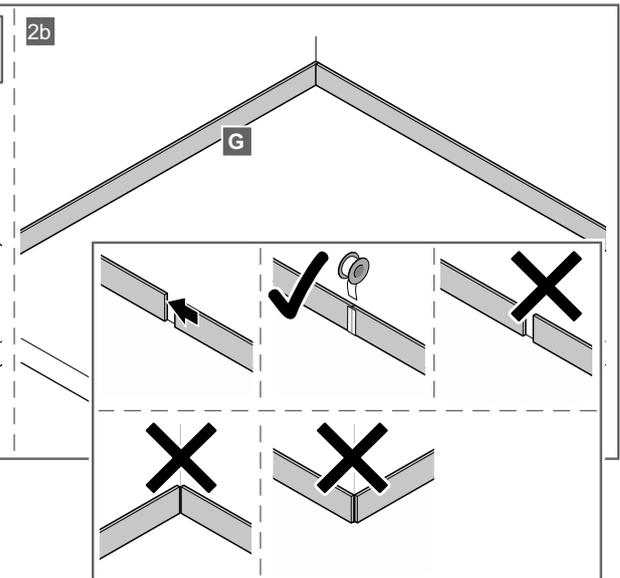
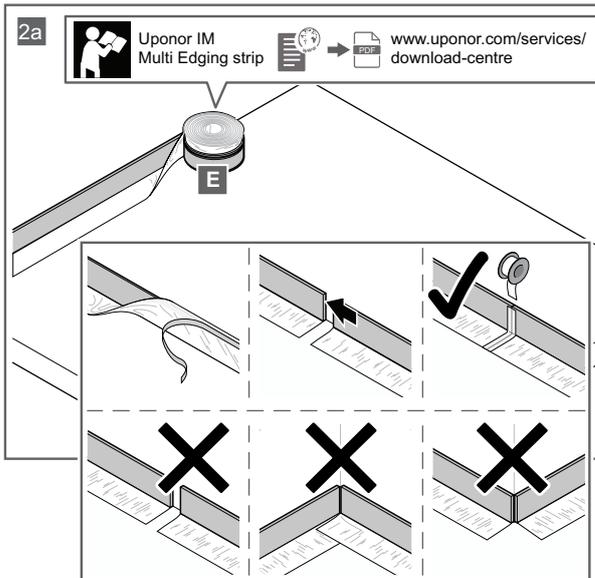
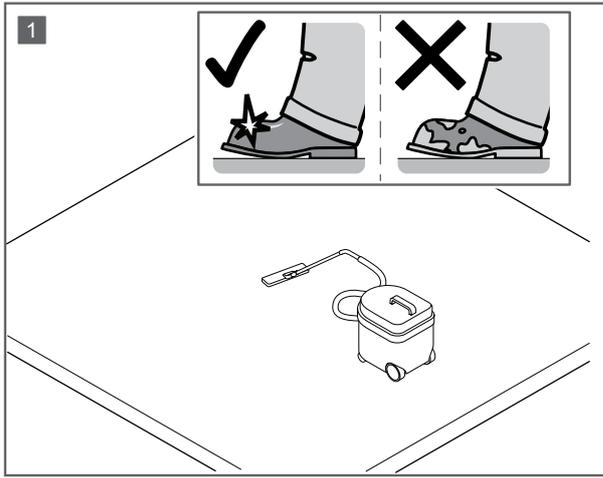
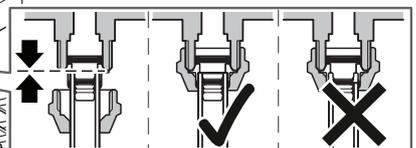


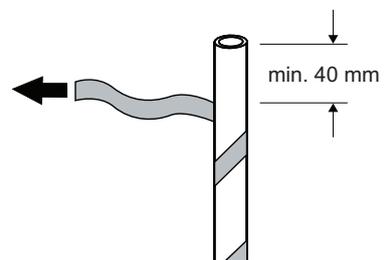
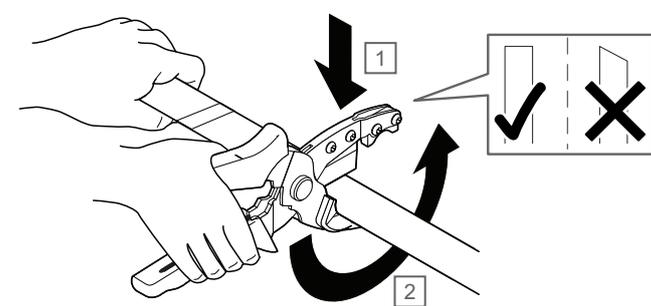


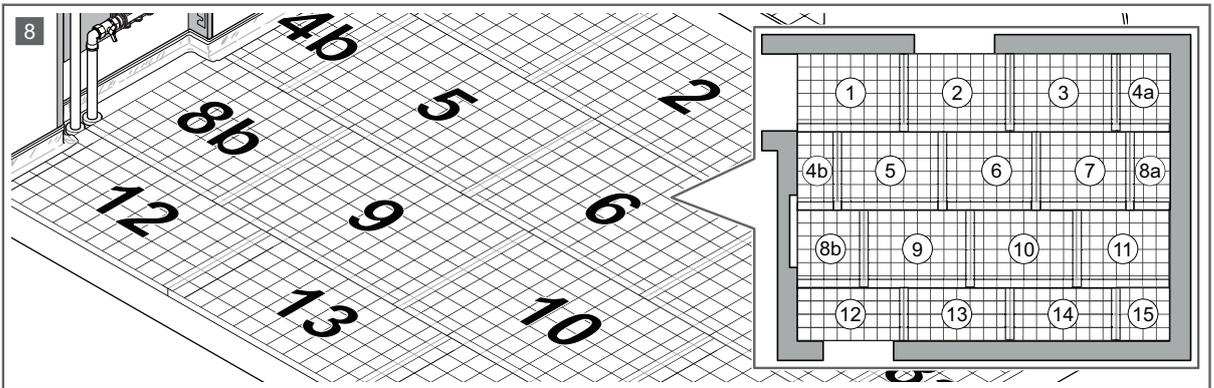
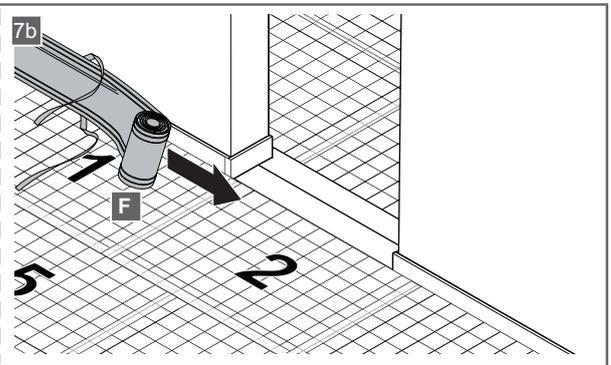
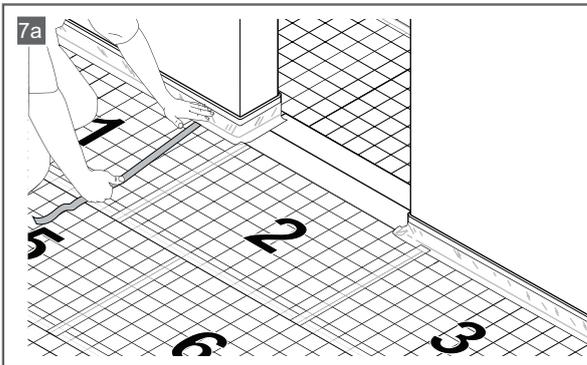
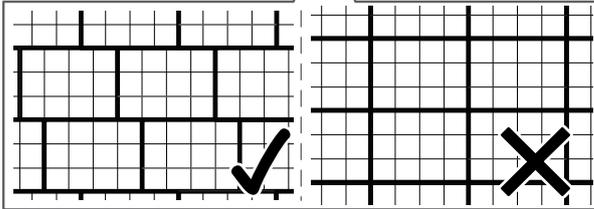
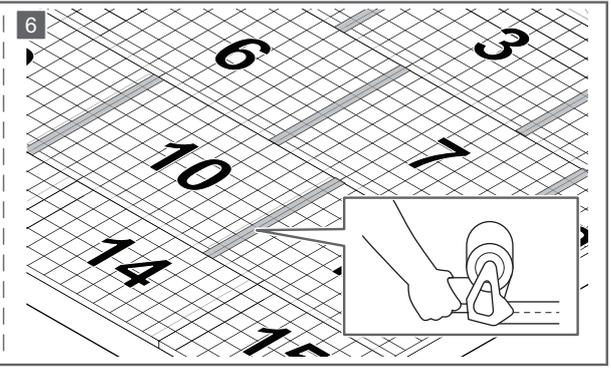
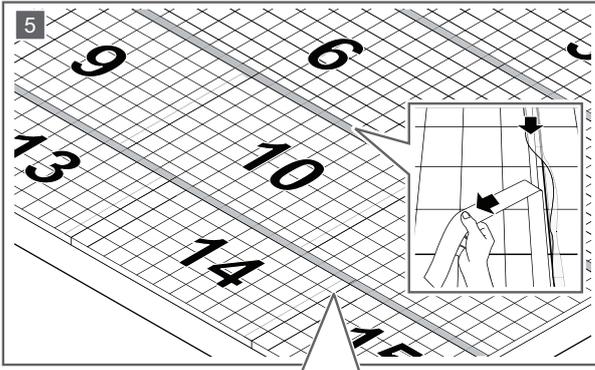


Uponor Klett Silent




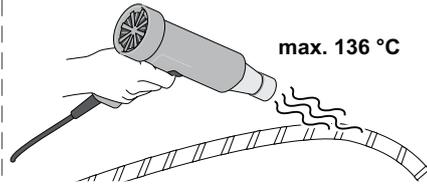







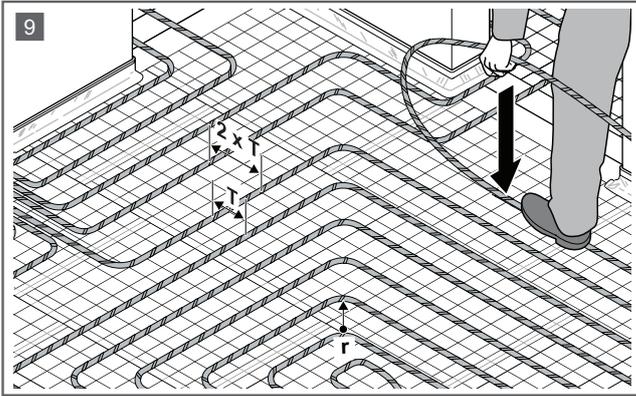


A1	Ø14	≥ 7,0 cm
	Ø16	≥ 8,0 cm
A2	Ø16	≥ 5,0 cm



EN 1264

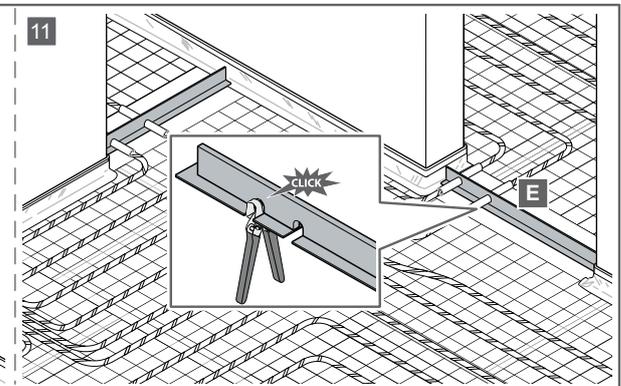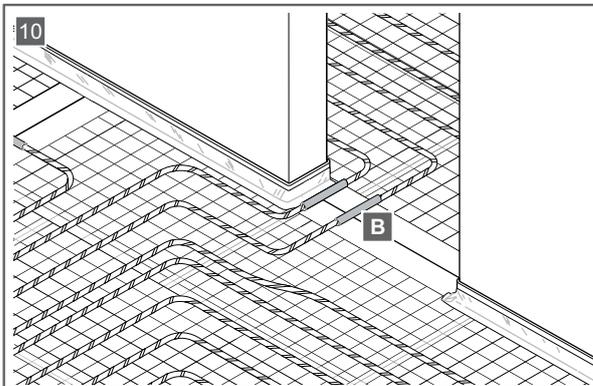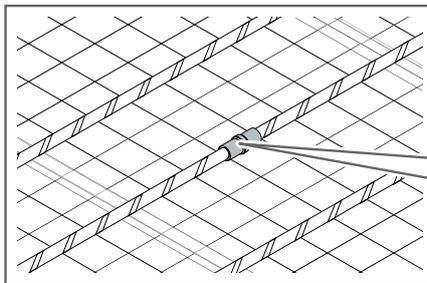


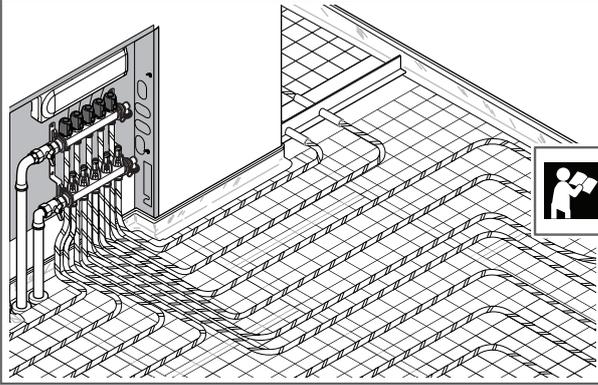

Uponor Vario S manifold
Uponor Vario M manifold
Uponor Vario PLUS manifold
Uponor Vario C manifold




www.uponor.com/services/download-centre

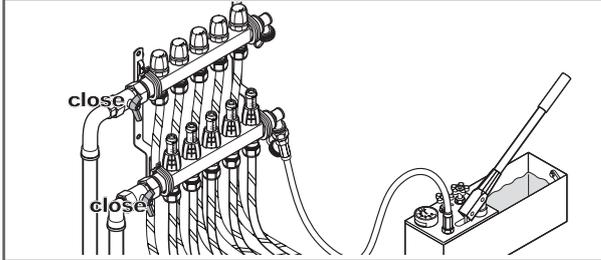

2 h



P = 4 – 6 bar



Uponor GmbH

Industriestraße 56,
D-97437 Hassfurt, Germany

1187747 v2_02_2026
Production: GF / SKA_ASP

Uponor reserves the right to make changes, without prior notification,
to the specification of incorporated components in line with its policy
of continuous improvement and development.



www.uponor.com