


Uponor S-Press PLUS concealed valve



S00000230

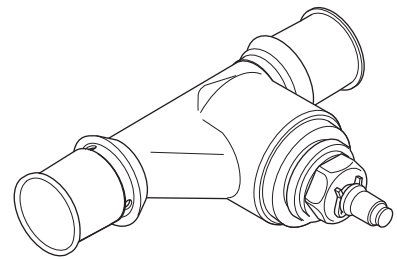

max. 10 bar





max. 90 °C





DIN EN 806, DIN EN 1213, DIN EN 1717,
DIN EN 13959, DIN 3502



DIN 4109 - valve group 1






d [mm]	A [mm]
16	50 - 100
20 / 25	55 - 105

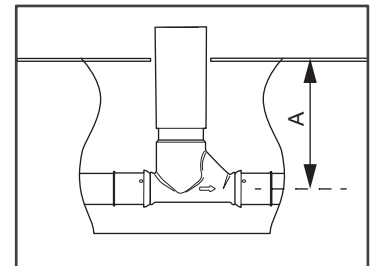

Uponor
S-Press PLUS



[www.uponor.com/
services/download-centre](http://www.uponor.com/services/download-centre)

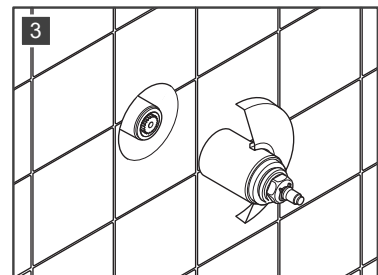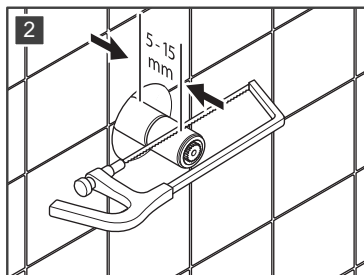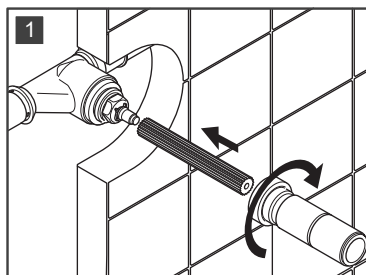

S00000525

Uponor GmbH

Industriestraße 56,
D-97437 Hassfurt, Germany

1135387 v1_07_2022_INT
Production: Uponor/DCO

Uponor reserves the right to make changes, without prior notification, to the specification of incorporated components in line with its policy of continuous improvement and development.



www.uponor.com