

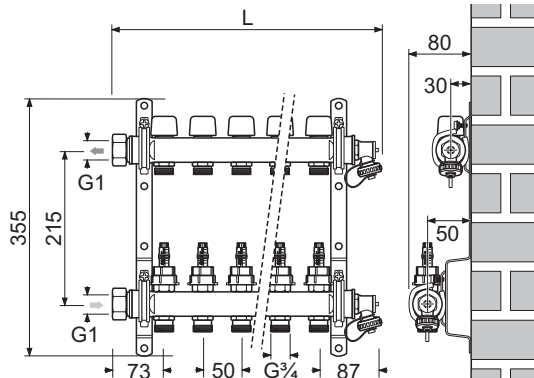



Uponor Vario C manifold FM



n	L [mm]	n	L [mm]
2	210	8	510
3	260	9	560
4	310	10	610
5	360	11	660
6	410	12	710
7	460		

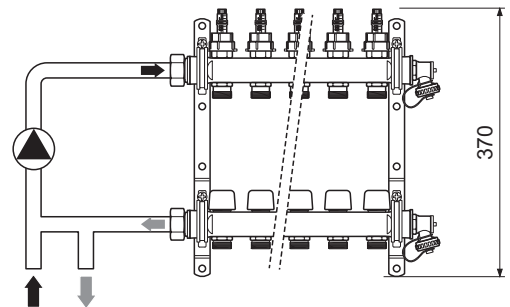

$\vartheta_{\text{sec}} = 15 - 60^{\circ}\text{C}$



$P_{\text{max}} = 6 \text{ bar}$



$P_{\text{test}} = 10 \text{ bar}$







$kvs = 1,1 \text{ m}^3/\text{h}$






$kvs = 2,5 \text{ m}^3/\text{h}$









$\dot{V}_{\text{max}} = 3,6 \text{ m}^3/\text{h}$ (12 loops)

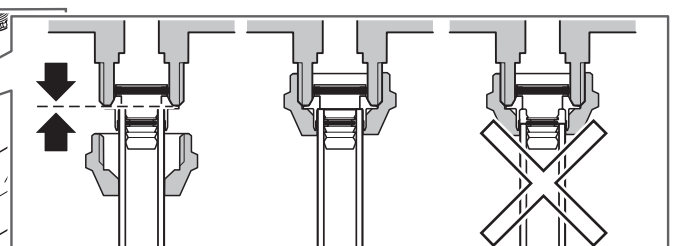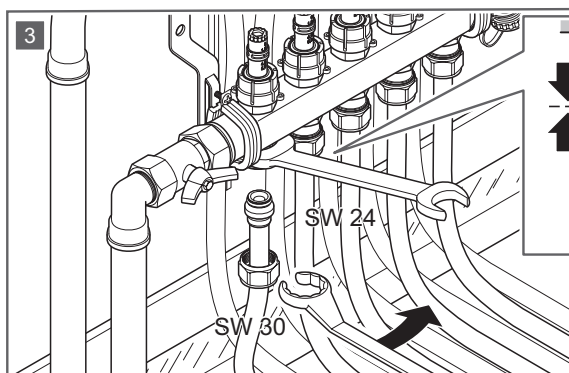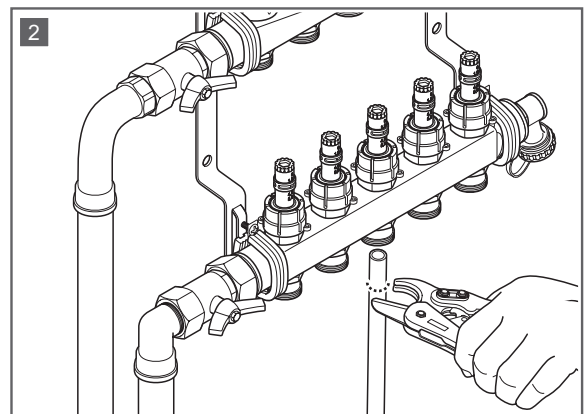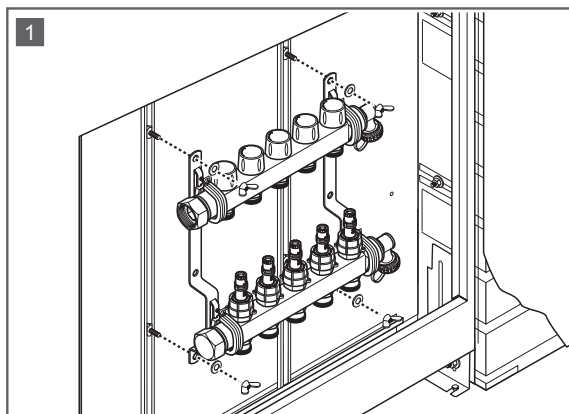

max. 25-30 Nm




1	1	2 l/m	0,5
1	2	5 l/m	3
2	3	2 l/m	1
3	4	4 l/m	4
4	5	1,5 l/m	2

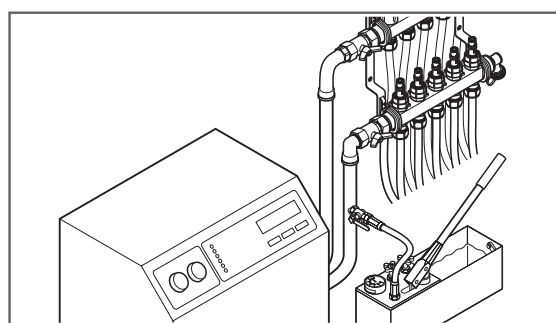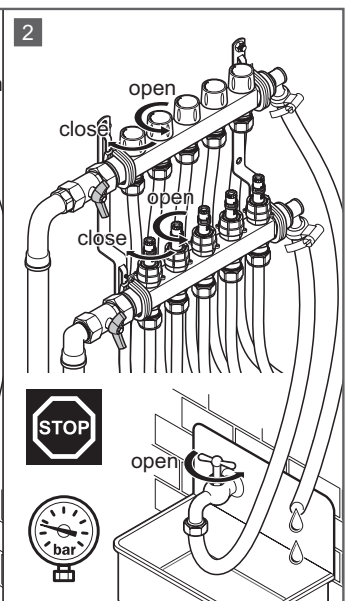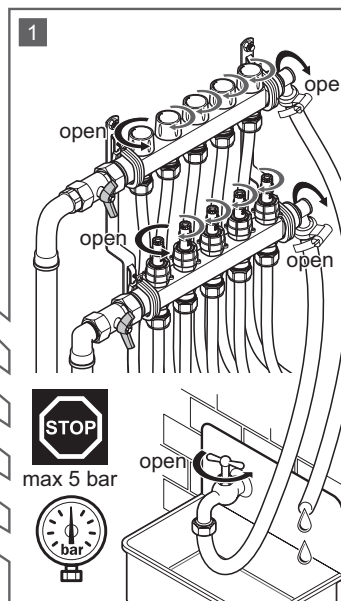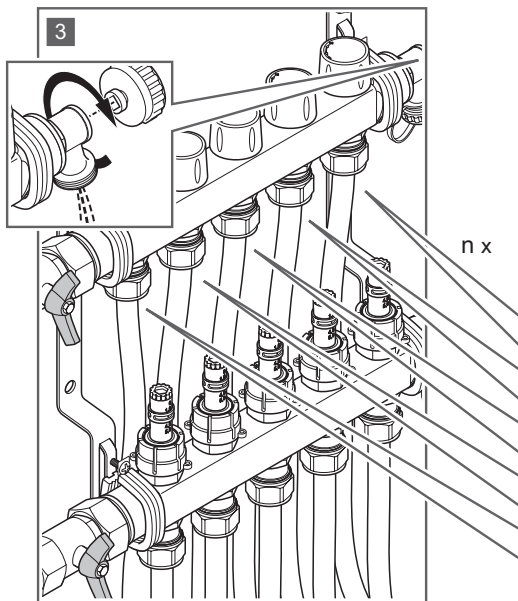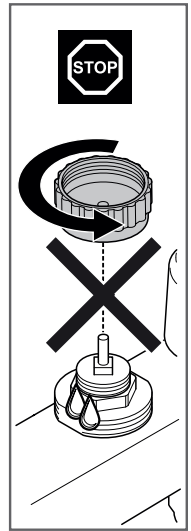

2 h



P = 4 – 6 bar



Uponor Vario C



www.uponor.com/services/download-centre

Uponor GmbH

Industriestraße 56,
D-97437 Hassfurt, Germany

1122087 v1_10_2021
Production: Uponor / ELO

Uponor reserves the right to make changes, without prior notification, to the specification of incorporated components in line with its policy of continuous improvement and development.



www.uponor.com