



Uponor Meltaway Sensor Supply/Return S-253



1) Fixation of sensor

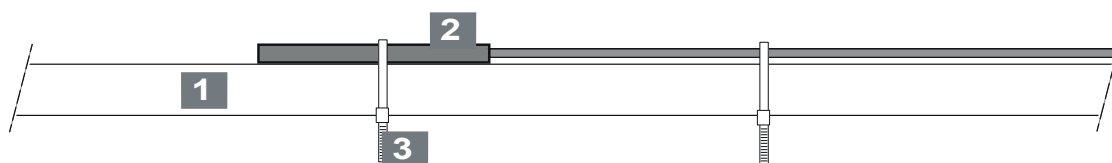

2) Insulation

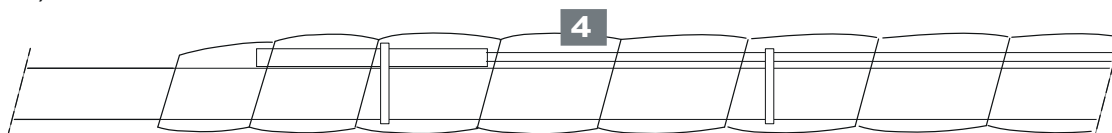

Fixation of sensor / Mocowanie czujnika / Fiksering av sensor / Fiksering af sensor / Fixering av sensor

Tighten sensor S-253 (2) with strip (3) on Uponor pipe (1) / Umocuj czujnik S-253 (2) za pomocą paska (3) na rurze Uponor (1) / Stram sensor S-253 (2) med stripe (3) på Uponor-røret (1) / Spænd føler S-253 (2) med strip (3) på Uponor-rør (1) / Dra åt givare S-253 (2) med remsa (3) på Uponor-røret (1)

Insulation / Izolacja / Isolasjon / Isolering / Isolering

Insulate well (4) to protect the sensor / Dobrze zaizoluj (4), aby chronić czujnik / Isoler godt (4) for å beskytte sensoren / Isoler godt (4) for at beskytte sensoren / Isolera väl (4) för att skydda sensorn

English **GB**


Polski **PL**

Norsk **NO**

Svenska **SE**

Denmark **DK**

Dimensional drawing / Rysunek wymiarowy / Dimensjonstegning / Dimensionstegning / Måttritning

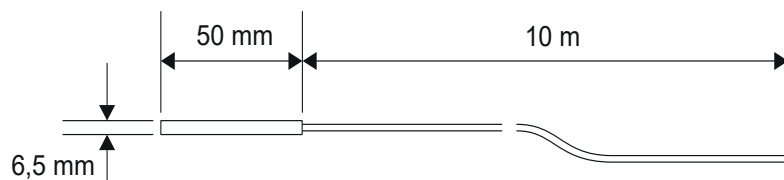

Technical data / Dane Techniczne / Tekniske data / Tekniske data / Tekniska data

GB

Accuracy at 65°C water temperature 2 °C
Accuracy at 40°C water temperature <1 °C
Ambient temperature.... -40/+248°F / -40/+120°C
Response time (T_{0,5}) < 60 sec.
Setting time 7 - 10 min.
Voltage: For use with SELV circuits only

PL

Dokładność przy temperaturze wody 65°C .. 2 °C
Dokładność przy temperaturze wody 40°C... <1 °C
Temperatura otoczenia... -40/+248°F / -40/+120°C
Czas reakcji (T_{0,5}) < 60 sek.
Czas wiązania 7 - 10 min.
Napięcie: tylko do stosowania z obwodami SELV

NO

Nøyaktighet ved vanntemperatur 65 °C.....2 °C
Nøyaktighet ved vanntemperatur 40 °C.....<1 °C
Omgivelsestemperatur...-40/+248 °F / -40/+120 °C
Responstid (T_{0,5}) < 60 sek.
Innstillingstid.....7-10 min.
Spenning: kun for bruk med SELV-kretser

DK

Nøjagtighed ved vandtemperatur 65°C 2 °C
Nøjagtighed ved vandtemperatur 40°C <1 °C
Omgivelsestemperatur . -40/+248°F / -40/+120°C
Reaktionstid (T_{0,5}) < 60 sek.
Indstillingstid 7 - 10 min.
Spænding:kun til brug med SELV-kredsløb

SE

Noggrannhet vid vattentemperatur 65°C 2 °C
Noggrannhet vid vattentemperatur 40°C <1 °C
Omgivningstemperatur . -40/+248°F / -40/+120°C
Svarstid (T_{0,5}) < 60 sek.
Inställningstid 7 - 10 min.
Spänning: endast för användning med SELV-kretsar

Uponor GmbH
Industriestraße 56
97437 Haßfurt



www.uponor.com

BFS Code 1184899_v1_06_2025_JLI
670149 04/25 (BCH)

Uponor reserves the right to change the product
ortfolio and the related documentation without prior
notification, in line with its policy of continuous
improvement and development.

+GF+