

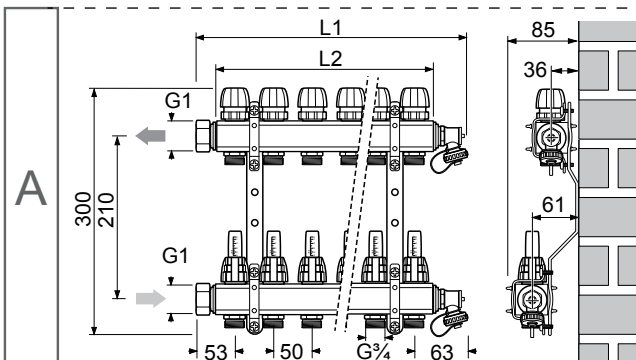



Uponor Vario B manifold FM



n	L ₁ [mm]	L ₂ [mm]
2	167	111
3	217	152
4	267	202
5	317	252
6	367	302
7	417	352

n	L ₁ [mm]	L ₂ [mm]
8	467	402
9	517	452
10	567	502
11	617	552
12	667	602

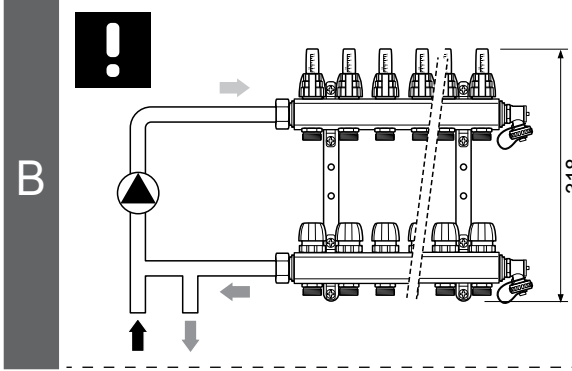





$\vartheta_{\text{sec}} = 15 - 60^{\circ}\text{C}$

$P_{\text{max}} = 6 \text{ bar}$









$P_{\text{test}} = 10 \text{ bar}$

$kvs = 0,93 \text{ m}^3/\text{h}$


$\dot{V}_{\text{max}} = 4,0 \text{ m}^3/\text{h}$
(12 loops)

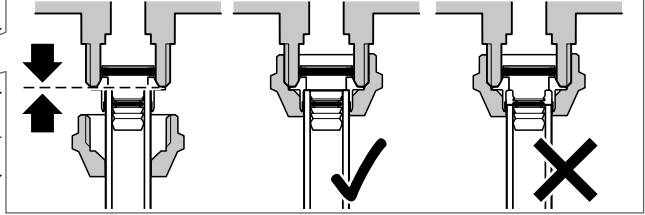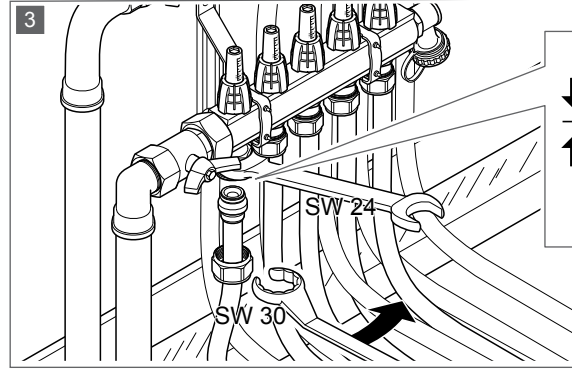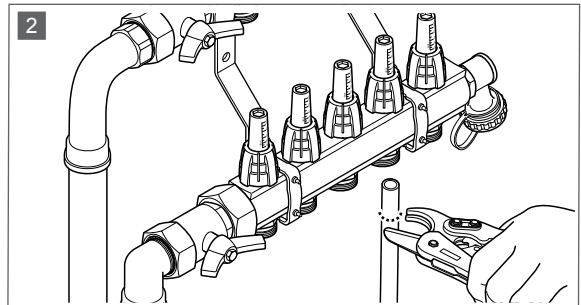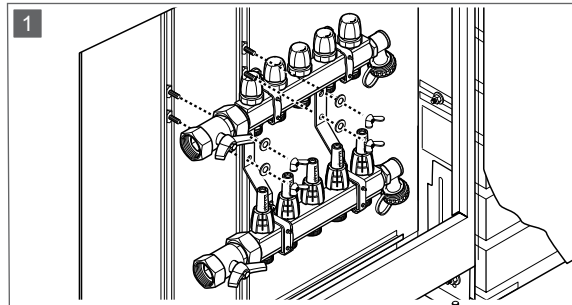

! max. 25-30 Nm

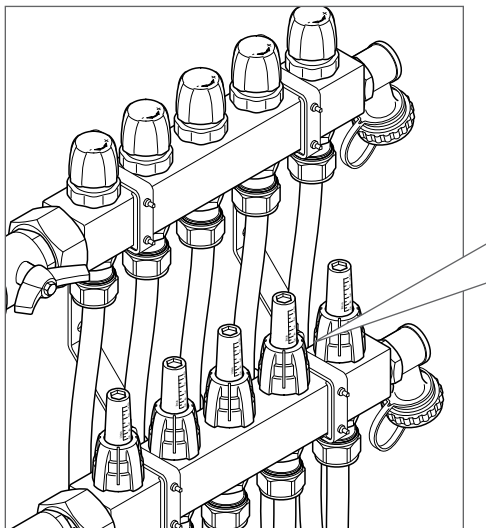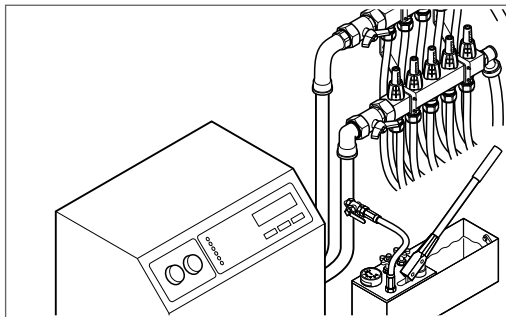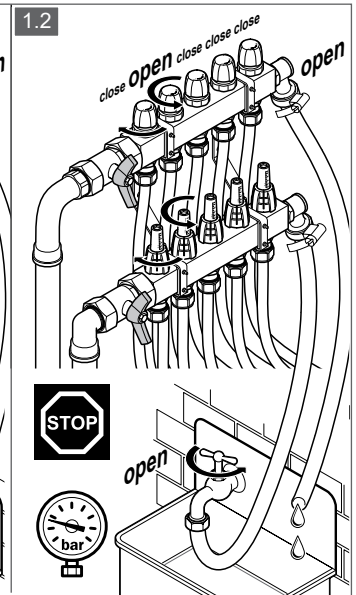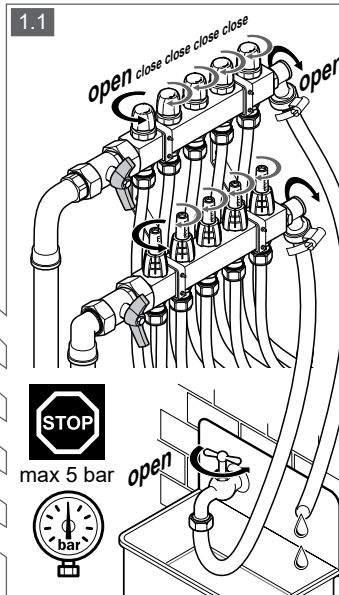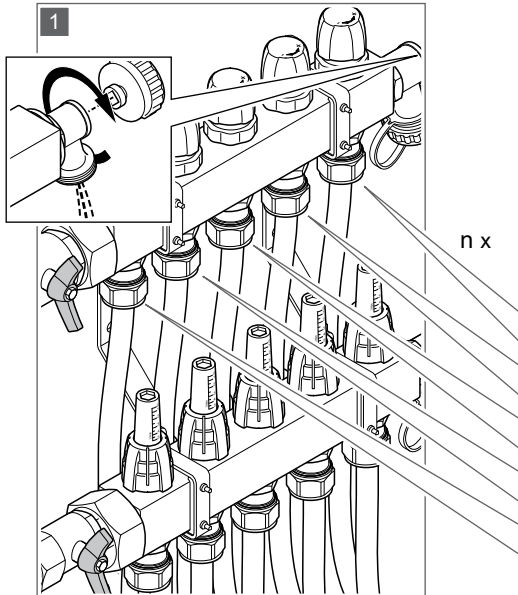

1	1	2 l/m	0,5
1	2	5 l/m	3
2	3	2 l/m	0,5
3	4	4 l/m	4
4	5	1,5 l/m	2



Uponor Vario B



www.uponor.com/services/download-centre

Uponor GmbH

Industriestraße 56,
D-97437 Hassfurt, Germany

1136369 v1_06_2022
Production: Uponor / SDE_FME

Uponor reserves the right to make changes, without prior notification, to the specification of incorporated components in line with its policy of continuous improvement and development.



www.uponor.com