


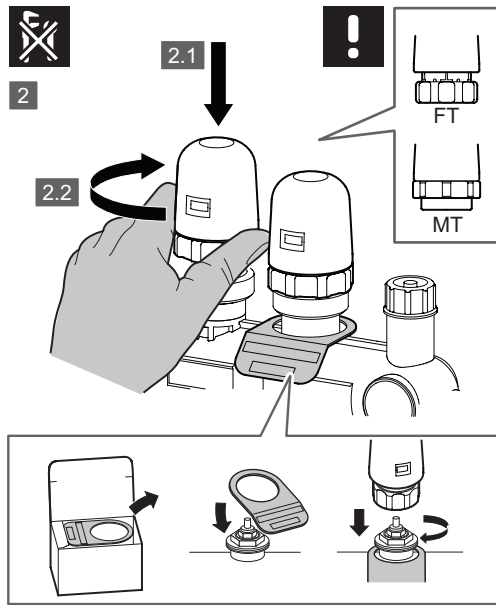
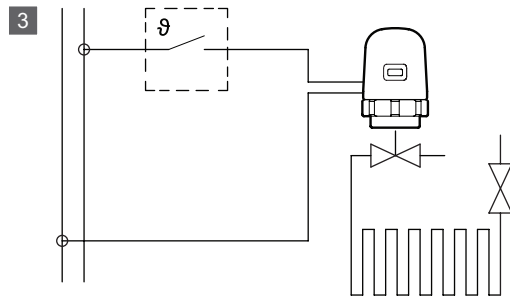
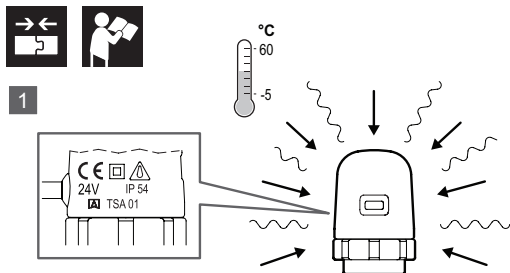
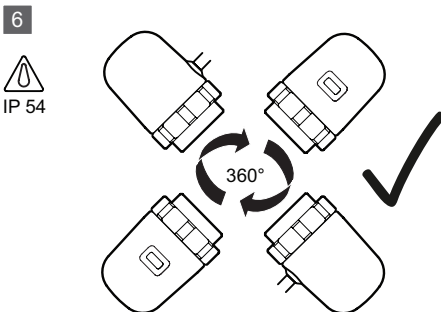
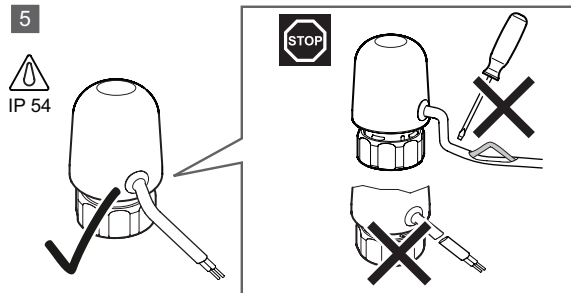


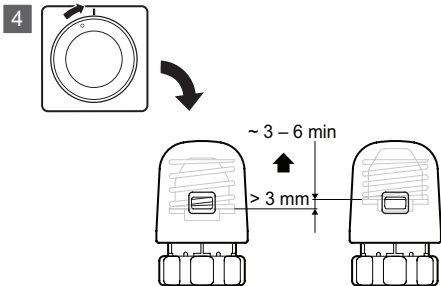

Uponor Vario actuator NC 24V/230V

uponor





	24 V	230 V
	 FT  MT	
	FT 28 x 1,5 mm	FT 28 x 1,5 mm
	FT 30 x 1,5 mm	FT 30 x 1,5 mm
	MT 30 x 1,5 mm	MT 30 x 1,5 mm
P	~ 2 W	~ 1,5 W
I _{max}	~ 184 mA	~ 140 mA
I _N	~ 84 mA	~ 9 mA
CE	IP 54	IP 54
	-5°C – 60°C	-5 °C – 60 °C
	Max. 80 °C	Max. 80 °C
F	~ 80 N	~ 80 N
Type	TSA 01	TSA 01

Uponor GmbH, Industriestraße 56, D-97437 Hassfurt, Germany

www.uponor.com

1120840 v2_08_2021 INT Production: Uponor / ELO

900.400.1010 08.2021.0

Uponor reserves the right to make changes, without prior notification, to the specification of incorporated components in line with its policy of continuous improvement and development.