

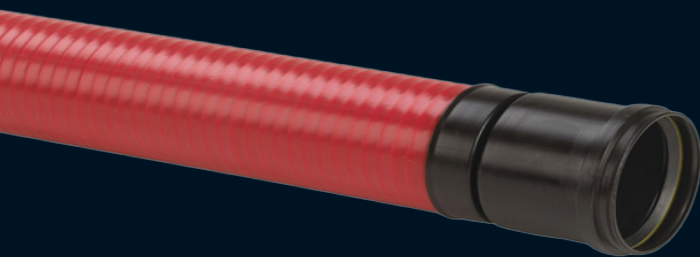


Tripla cable protection pipes
Technical Datasheet

UPONOR

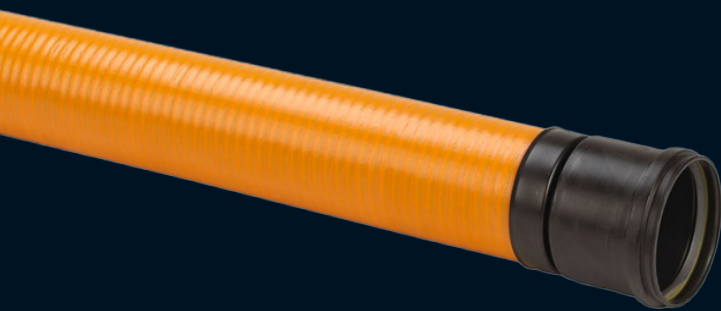

Tripla cable protection pipes

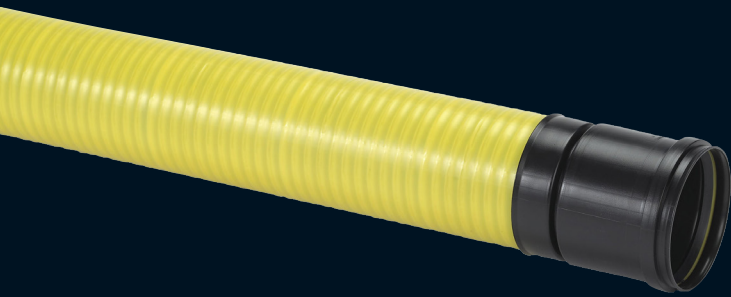

Made of PE.

Ring stiffness SN8.

Installed in both normal and difficult conditions.

Easy to handle and install.

Easy connection with both smooth and corrugated pipes.

Welded socket with permanently mounted oil and chemical resistant sealing ring.

Completely waterproof system.

Tripla cable protection pipes

Uponor Tripla is Uponor's third generation of cable protection pipes. The completely unique pipe construction makes it possible to use the pipe for normal installations but also for installations where extra high ring stiffness is required.


Application	Protection of cables
Material	Polyethylene
Colour	Yellow, green, red or orange
Dimensions	110 and 160mm
Length	6m
Class	SRN, SN8
Design	Three-layer pipe with smooth inside and outside.
Standards and approvals	Ring stiffness and impact strength according to SS 4241437. Tightness according to EN 13476.



Properties and Assortment


System properties		Standard
Ring stiffness	Reinforced design Nominal stiffness 8 kN/mm ²	SS 424 14 37 ed 6
Impact strength	Normal design Pointed striker Weight 10 kg, height 500 mm	SS 424 14 37 ed 6


Tripla pipe	Dimension mm	Length m	Weight kg/pcs	Colour	Package m	Uponor no	RSK no	E-no
	110/95	6	4,3	Yellow	300	1051577	2418947	0663180
	110/95	6	4,3	Green	300	1051579	2418946	0663181
	110/95	6	4,3	Red	300	1051580	2418957	
	110/95	6	4,3	Orange	300	1051584	2418949	0663182
	160/138	6	9,6	Yellow	168	1051586	2418948	0663184
	160/138*	6	9,6	Green	168	1139962		
	160/138	6	9,6	Red	168	1055213		

*Delivery time confirmed upon order

Bend	Dimension mm	Length m	Weight kg/pcs	Colour	Package count	Uponor no	RSK no	E-no
	160	1,8	2,1	Black	25	1050159	2419037	0663186

Double socket	Dimension mm	Socket depth mm	Weight kg/pcs	Package box/pallet	Uponor no	RSK no	E-no
 	160	120	0,2	9/270	1050161	2418951	0663188
	160	77	0,55	12/96	1071973	2354030	

Sealing ring	Dimension mm	Package box/pallet	Uponor no	RSK no	E-no
	160/138	Piece	1053659	2340432	0663229

Plug	Dimension mm	Length mm	Weight kg/pcs	Package box/pallet	Uponor no	RSK no
	160	70	0,3	10/240	1050075	2353975

Moving
> Forward

uponor

Uponor Infra AB

Industrivägen 11

513 32 Fristad

Sweden

T +46 33 172 500

E infrastruktur.se@uponor.se

www.uponor.com/sv-se/infra